FSC 5307

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

…: When Government drawings, specifications, or other data are used for any purpose other than in connection with a d… …rement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and th… …y have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by im… …on or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto. …ed Govern- the Govern-

AN166401 THRU AN166700

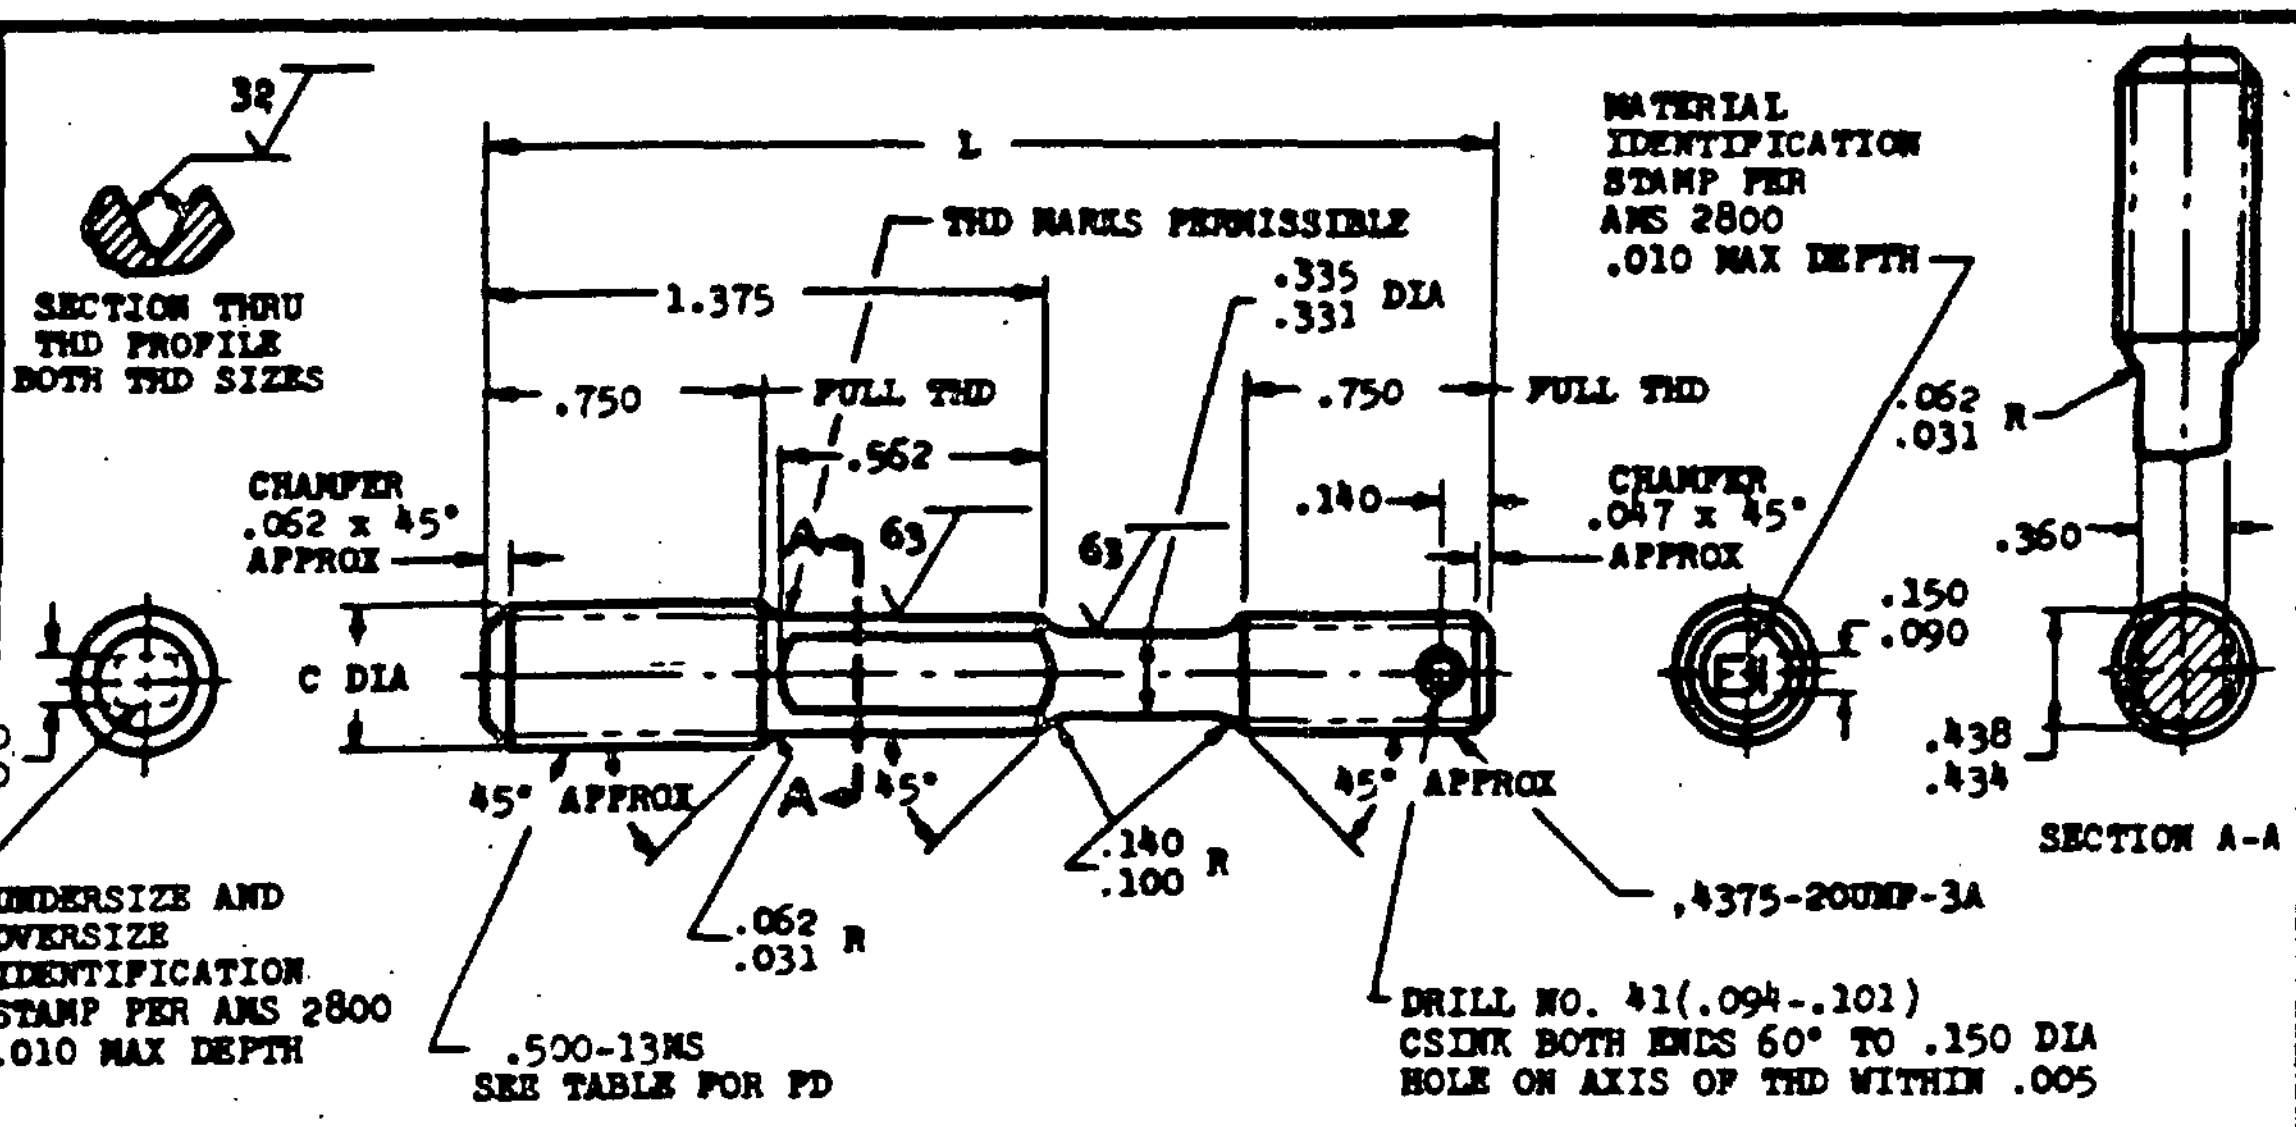
32
SECTION THRU THD PROFILE BOTH THD SIZES
L
THD MARKS PERMISSIBLE
1.375
.335 .331 DIA
.750
FULL THD
.750
FULL THD
.562
.140
CHAMFER .062 x 45° APPROX
CHAMFER .047 x 45° APPROX
A
63
63
C DIA
.150 .090
45° APPROX
A
45°
.140 .100 R
45° APPROX
.062 .031 R
UNDERSIZE AND OVERSIZE IDENTIFICATION STAMP PER AMS 2800 .010 MAX DEPTH
.500-13NS SEE TABLE FOR PD
.4375-20UNF-3A
DRILL NO. 41(.094-.101) CSINK BOTH ENDS 60° TO .150 DIA HOLE ON AXIS OF THD WITHIN .005
MATERIAL IDENTIFICATION STAMP PER AMS 2800 .010 MAX DEPTH
.062 .031 R
.360
.150 .090
.438 .434
SECTION A-A

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003	STANDARD	+.003	+.006	+.009	+.012
	(-3)	○	③	⑥	⑨	⑫
C	.495- .500	.495- .500	.495- .500	.495- .500	.504- .509	.504- .509
PD BEFORE PLATING	.4518-.4528	.4548-.4558	.4578-.4588	.4608-.4618	.4638-.4648	.4668-.4678
PD AFTER PLATING	.4523-.4538	.4553-.4568	.4583-.4598	.4613-.4628	.4643-.4658	.4673-.4688
PD LEAD THREAD	.4450-.4470	.4480-.4500	.4510-.4530	.4540-.4560	.4570-.4590	.4600-.4620
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.375	AN166413	AN165414	AN166415	AN166416	AN166417	AN166418
2.438	AN166419	AN166420	AN166421	AN166422	AN166423	AN166424
2.500	AN166425	AN166426	AN166427	AN166428	AN166429	AN166430
2.625	AN166431	AN166432	AN166433	AN166434	AN165435	AN166436
2.750	AN166437	AN166438	AN166439	AN166440	AN166441	AN166442
2.875	AN166443	AN166444	AN166445	AN166446	AN166447	AN166448
3.000	AN165449	AN166450	AN166451	AN166452	AN166453	AN166454
3.125	AN165455	AN165456	AN166457	AN166458	AN166459	AN166460
3.250	AN166461	AN166462	AN166463	AN166464	AN166465	AN166466
3.375	AN166467	AN166468	AN166469	AN166470	AN165471	AN166472
3.500	AN166473	AN166474	AN166475	AN166476	AN166477	AN166478
3.625	AN166479	AN166480	AN166481	AN166482	AN166483	AN166484
3.750	AN166485	AN166486	AN166487	AN166488	AN166489	AN166490
3.875	AN166491	AN166492	AN166493	AN166494	AN166495	AN166496
4.000	AN166497	AN166498	AN166499	AN166500	AN166501	AN166502
4.125	AN166503	AN166504	AN166505	AN166506	AN156507	AN166508
4.250	AN166509	AN165510	AN166511	AN166512	AN166513	AN166514
4.375	AN166515	AN166516	AN166517	AN166518	AN166519	AN166520
4.500	AN166521	AN166522	AN166523	AN166524	AN166525	AN166526
4.625	AN166527	AN166528	AN166529	AN166530	AN166531	AN166532
4.750	AN166533	AN166534	AN166535	AN166536	AN166537	AN166538
4.875	AN166539	AN166540	AN166541	AN166542	AN166543	AN166544
5.000	AN166545	AN166546	AN166547	AN166548	AN166549	AN166550
5.125	AN166551	AN166552	AN166553	AN166554	AN166555	AN166556
5.250	AN166557	AN166558	AN166559	AN166560	AN166561	AN166562
5.375	AN166563	AN166564	AN166565	AN166566	AN166567	AN166568
5.500	AN166569	AN166570	AN166571	AN166572	AN166573	AN166574
5.625	AN166575	AN166576	AN166577	AN166578	AN166579	AN166580
5.750	AN166581	AN166582	AN166583	AN166584	AN166585	AN166586
5.875	AN165587	AN166588	AN166589	AN166590	AN166591	AN166592
6.000	AN166593	AN166594	AN166595	AN166596	AN166597	AN166598
6.125	AN166599	AN166600	AN166601	AN166602	AN166603	AN166604
6.250	AN166605	AN166606	AN166607	AN166608	AN166609	AN166610

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010,
ANGULAR DIMENSIONS ±2°.

③ CANCELED AS OF 9 OCT 87

~~DO NOT USE UNASSIGNED PART NUMBERS~~

② INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED ① 25 Mar 55 ② 26 Oct 72 ③ 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN166401 THRU AN166700
NONE	STUD-STEPPED, DRILLED, NECKED, WRENCH PAD. 1.5 DIA ENGAGEMENT, .500-13 x .4375-20	

E-25-121

Project 5307-~~0~~418

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.