FSC 5307

AN167601
THRU
AN167900

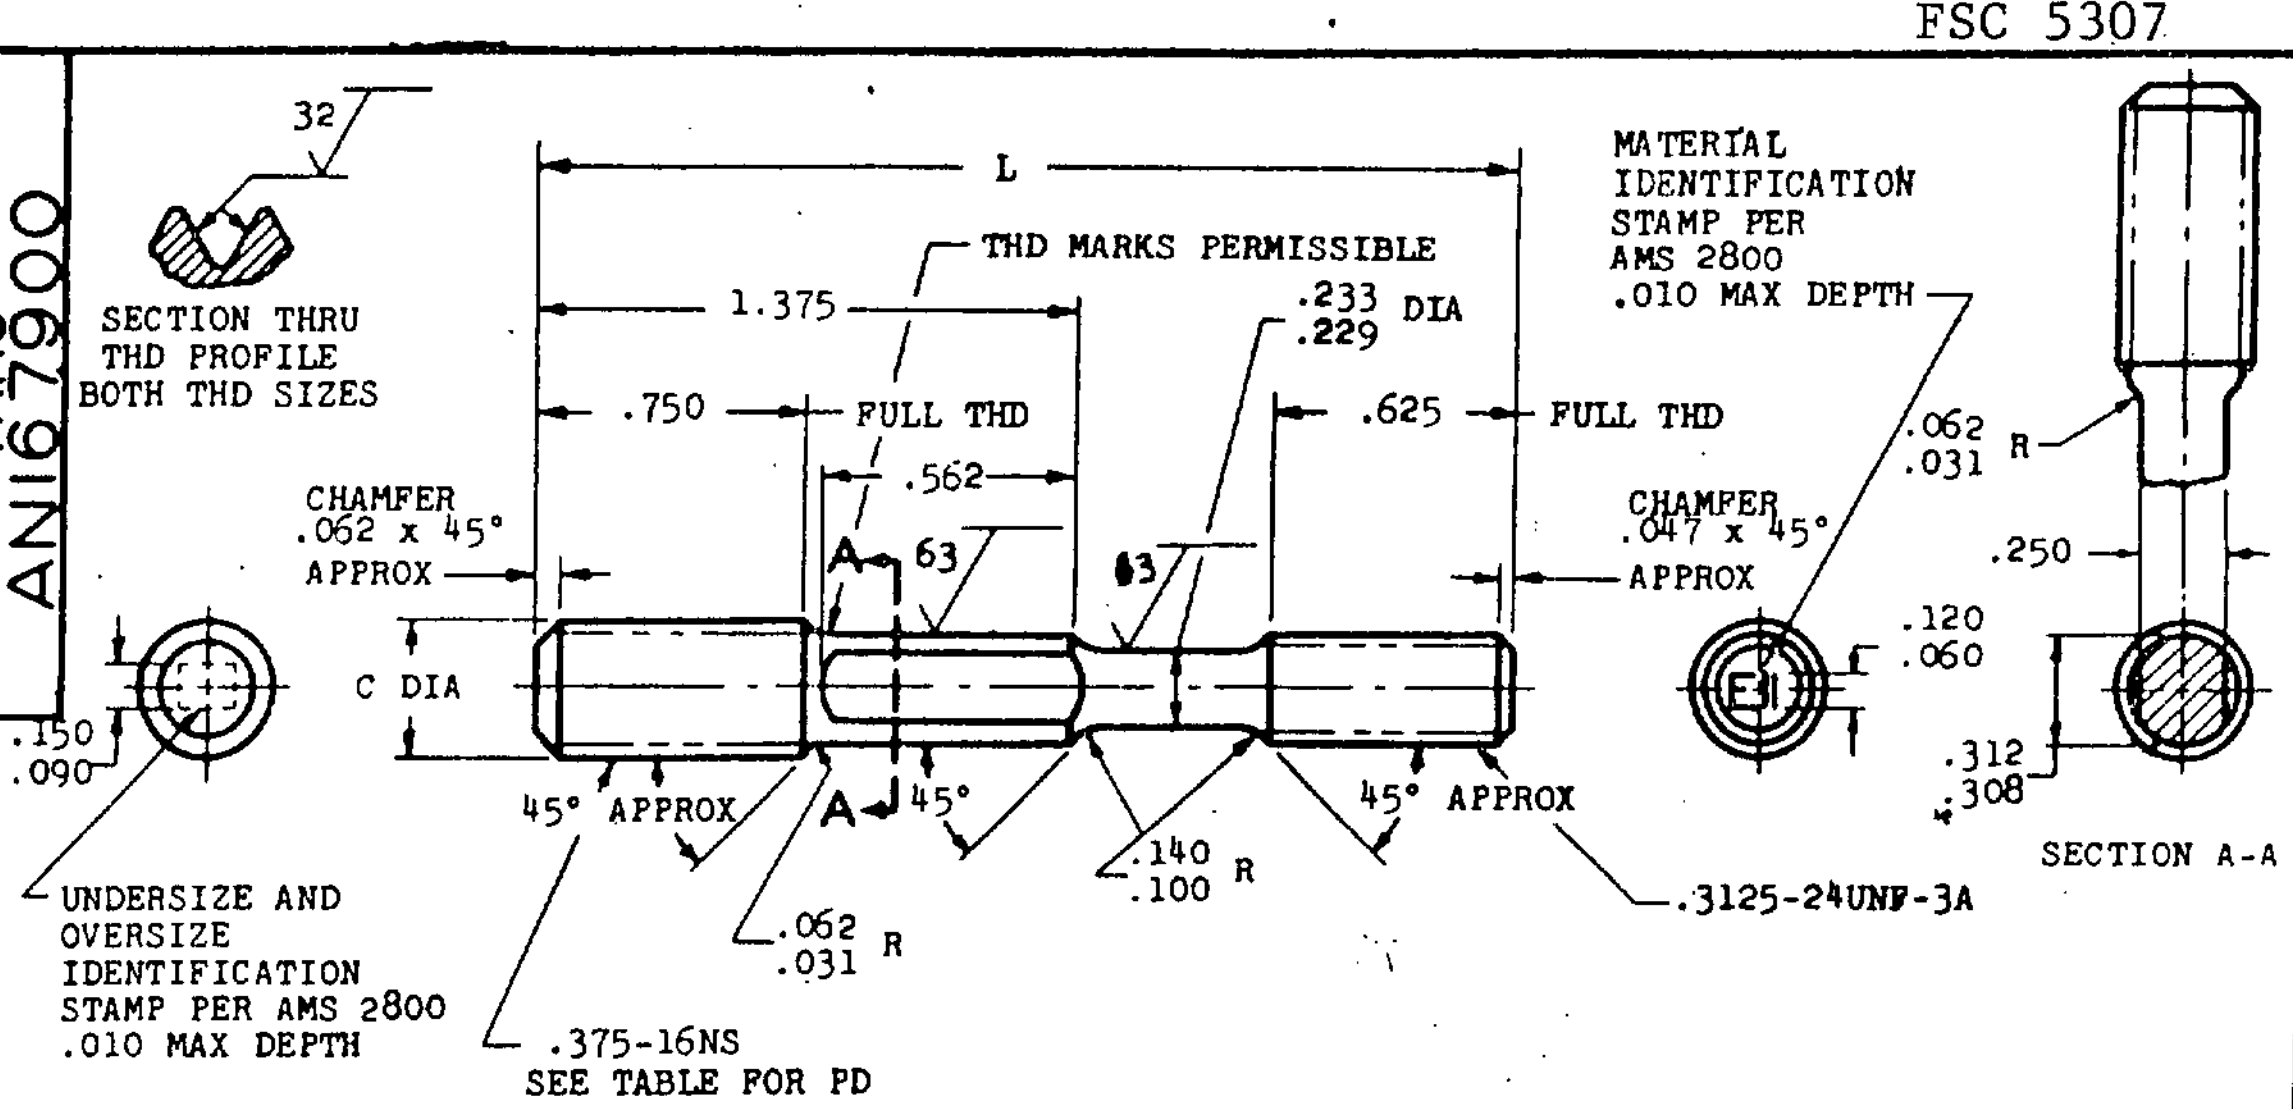
32
SECTION THRU THD PROFILE BOTH THD SIZES
L
1.375
.750
FULL THD
THD MARKS PERMISSIBLE
.233 DIA
.229
.625
FULL THD
.562
63
63
CHAMFER .062 x 45° APPROX
CHAMFER .047 x 45° APPROX
MATERIAL IDENTIFICATION STAMP PER AMS 2800 .010 MAX DEPTH
A
A
C DIA
.150
.090
45° APPROX
45°
45° APPROX
.140
.100
R
.062
.031
R
.3125-24UNF-3A
UNDERSIZE AND OVERSIZE IDENTIFICATION STAMP PER AMS 2800 .010 MAX DEPTH
.375-16NS SEE TABLE FOR PD
.062
.031
R
.250
.120
.060
.312
.308
SECTION A-A

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003	STANDARD	+.003	+.006	+.009	+.012
	◎ -3	◎	◎ 3	◎ 6	◎ 9	◎ 12
C PD BEFORE PLATING PD AFTER PLATING PD LEAD THREAD	.370- .375 .3357-.3367 .3352-.3377 .3294-.3314	.370- .375 .3387-.3397 .3392-.3407 .3324-.3344	.370- .375 .3417-.3427 .3422-.3437 .3354-.3374	.370- .375 .3447-.3457 .3452-.3467 .3384-.3404	.379- .384 .3477-.3487 .3482-.3497 .3414-.3434	.379- .384 .3507-.3517 .3512-.3527 .3444-.3464
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.250	AN167613	AN167614	AN167615	AN167616	AN167617	AN167618
2.312	AN167619	AN167620	AN167621	AN167622	AN167623	AN167624
2.375	AN167625	AN167626	AN167627	AN167628	AN167629	AN167630
2.438	AN167631	AN167632	AN167633	AN167634	AN167635	AN167636
2.500	AN167637	AN167638	AN167639	AN167640	AN167641	AN167642
2.625	AN167643	AN167644	AN167645	AN167646	AN167647	AN167648
2.750	AN167649	AN167650	AN167651	AN167652	AN167653	AN167654
2.875	AN167655	AN167656	AN167657	AN167658	AN167659	AN167660
3.000	AN167661	AN167662	AN167663	AN167664	AN167665	AN167666
3.125	AN167667	AN167668	AN167669	AN167670	AN167671	AN167672
3.250	AN167673	AN167674	AN167675	AN167676	AN167677	AN167678
3.375	AN167679	AN167680	AN167681	AN167682	AN167683	AN167684
3.500	AN167685	AN167686	AN167687	AN167688	AN167689	AN167690
3.625	AN167691	AN167692	AN167693	AN167694	AN167695	AN167696
3.750	AN167697	AN167698	AN167699	AN167700	AN167701	AN167702
3.875	AN167703	AN167704	AN167705	AN167706	AN167707	AN167708
4.000	AN167709	AN167710	AN167711	AN167712	AN167713	AN167714
4.125	AN167715	AN167716	AN167717	AN167718	AN167719	AN167720
4.250	AN167721	AN167722	AN167723	AN167724	AN167725	AN167726
4.375	AN167727	AN167728	AN167729	AN167730	AN167731	AN167732
4.500	AN167733	AN167734	AN167735	AN167736	AN167737	AN167738
4.625	AN167739	AN167740	AN167741	AN167742	AN167743	AN167744
4.750	AN167745	AN167746	AN167747	AN167748	AN167749	AN167750
4.875	AN167751	AN167752	AN167753	AN167754	AN167755	AN167756
5.000	AN167757	AN167758	AN167759	AN167760	AN167761	AN167762
5.125	AN167763	AN167764	AN167765	AN167766	AN167767	AN167768
5.250	AN167769	AN167770	AN167771	AN167772	AN167773	AN167774
5.375	AN167775	AN167776	AN167777	AN167778	AN167779	AN167780
5.500	AN167781	AN167782	AN167783	AN167784	AN167785	AN167786
5.625	AN167787	AN167788	AN167789	AN167790	AN167791	AN167792
5.750	AN167793	AN167794	AN167795	AN167796	AN167797	AN167798

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: **STEEL AMS 6322** (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010,
ANGULAR DIMENSIONS ±2°
DO NOT USE UNASSIGNED PART NUMBERS.

② **INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.**

③ CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED ① 25 Mar 55 ② 26 Oct 72 ③ 9 OCT 87

PROCUREMENT SPECIFICATION **NONE**	**AIR FORCE-NAVY AERONAUTICAL STANDARD** STUD-STEPPED, NECKED, WRENCH PAD, 2 DIA ENGAGEMENT, .375-16 x .3125-24	AN167601 THRU AN167900

E-25-121

Project 5307-0422

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

CS: When Government drawings, specifications, or other data are used for any purpose other than in connection with a d... ernment operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.