
AN168501 THRU AN168800

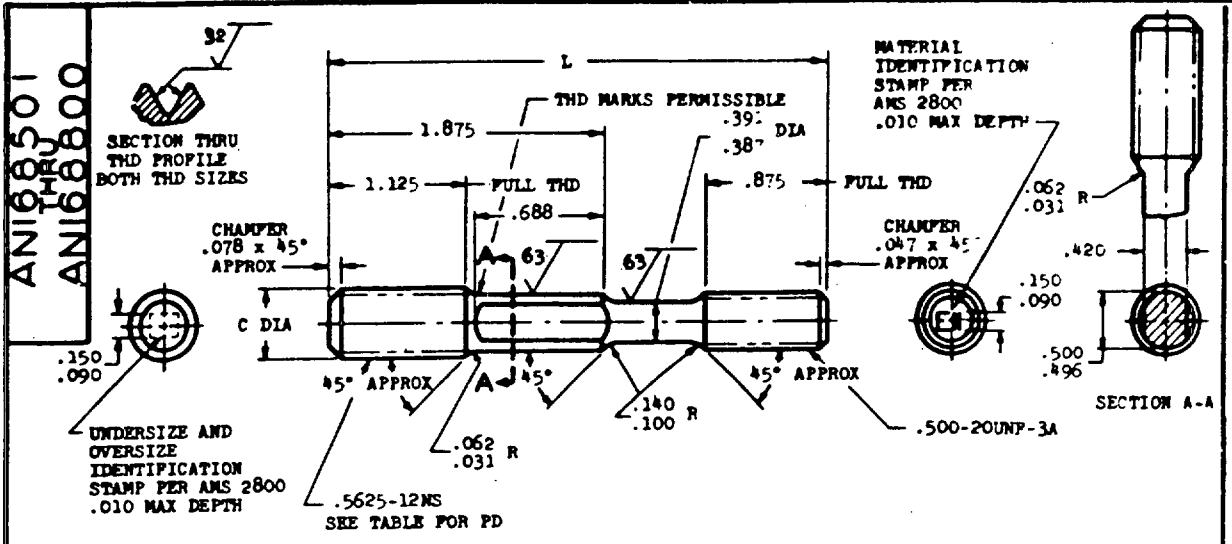

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.557- .562	.557- .562	.557- .562	.557- .562	.555- .561	.556- .561
PD BEFORE PLATING	.5104-.5114	.5134-.5144	.5164-.5174	.5194-.5204	.5224-.523-	.5254-.5264
PD AFTER PLATING	.5109-.5124	.5139-.5154	.5169-.5184	.5199-.5214	.5229-.52--	.5259-.5274
PD LEAD THREAD	.5034-.5054	.5064-.5084	.5094-.5114	.5124-.5144	.5154-.51--	.5184-.5204
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
3.000	AN168513	AN168514	AN168515	AN168516	AN168517	AN168518
3.125	AN168519	AN168520	AN168521	AN168522	AN168523	AN168524
3.250	AN168525	AN168526	AN168527	AN168528	AN168529	AN168530
3.375	AN168531	AN168532	AN168533	AN168534	AN168535	AN168536
3.500	AN168537	AN168538	AN168539	AN168540	AN168541	AN168542
3.625	AN168543	AN168544	AN168545	AN168546	AN168547	AN168548
3.750	AN168549	AN168550	AN168551	AN168552	AN168553	AN168554
3.875	AN168555	AN168556	AN168557	AN168558	AN168559	AN168560
4.000	AN168561	AN168562	AN168563	AN168564	AN168565	AN168566
4.125	AN168567	AN168568	AN168569	AN168570	AN168571	AN168572
4.250	AN168573	AN168574	AN168575	AN168576	AN168577	AN168578
4.375	AN168579	AN168580	AN168581	AN168582	AN168583	AN168584
4.500	AN168585	AN168586	AN168587	AN168588	AN168589	AN168590
4.625	AN168591	AN168592	AN168593	AN168594	AN168595	AN168596
4.750	AN168597	AN168598	AN168599	AN168600	AN168601	AN168602
4.875	AN168603	AN168604	AN168605	AN168606	AN168607	AN168608
5.000	AN168609	AN168610	AN168611	AN168612	AN168613	AN168614
5.125	AN168615	AN168616	AN168617	AN168618	AN168619	AN168620
5.250	AN168621	AN168622	AN168623	AN168624	AN168625	AN168626
5.375	AN168627	AN168628	AN168629	AN168630	AN168631	AN168632
5.500	AN168633	AN168634	AN168635	AN168636	AN168637	AN168638
5.625	AN168639	AN168640	AN168641	AN168642	AN168643	AN168644
5.750	AN168645	AN168646	AN168647	AN168648	AN168649	AN168650
5.875	AN168651	AN168652	AN168653	AN168654	AN168655	AN168656
6.000	AN168657	AN168658	AN168659	AN168660	AN168661	AN168662
6.125	AN168663	AN168664	AN168665	AN168666	AN168667	AN168668
6.250	AN168669	AN168670	AN168671	AN168672	AN168673	AN168674
6.375	AN168675	AN168676	AN168677	AN168678	AN168679	AN168680
6.500	AN168681	AN168682	AN168683	AN168684	AN168685	AN168686
6.625	AN168687	AN168688	AN168689	AN168690	AN168691	AN168692
6.750	AN168693	AN168694	AN168695	AN168696	AN168697	AN168698
6.875	AN168699	AN168700	AN168701	AN168702	AN168703	AN168704

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6327 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD. DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 55 (1) REVISED (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN168501 THRU AN168800
[redacted]	[redacted] STUD-STEPPED, HEXED, WRENCH PAD, 2 DIA ENGAGEMENT, .5625-12 x .500-20	

E-25-121

PROJECT 5307-0425

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.