
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN169101 THRU AN169400

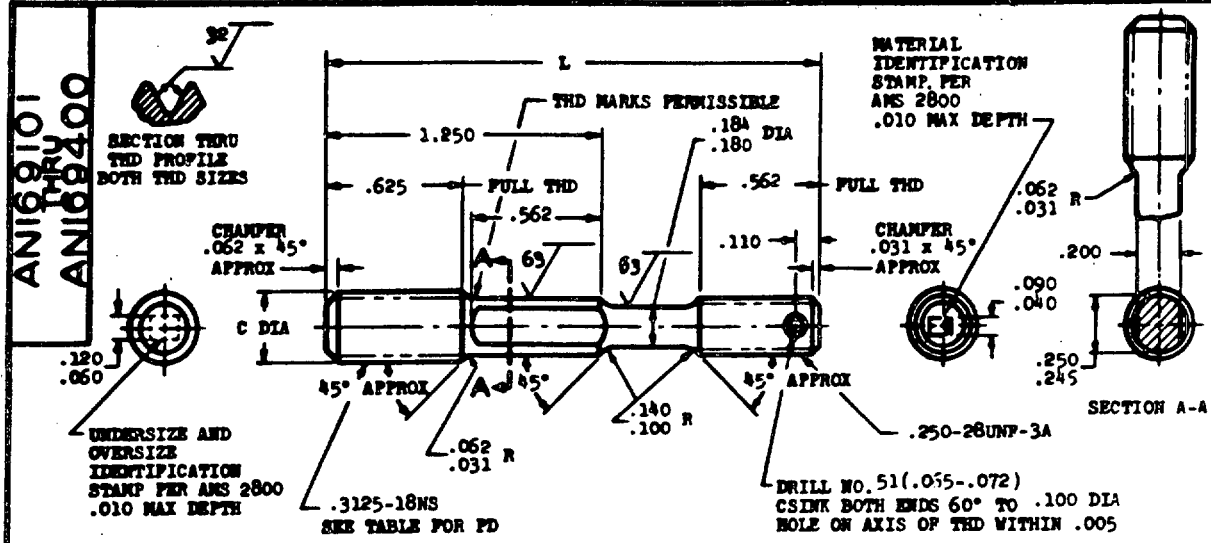

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.307- .312	.307- .312	.307- .312	.307- .312	.316- .321	.316- .321
FD BEFORE PLATING	.2775-.2785	.2805-.2815	.2835-.2845	.2865-.2875	.2895-.2905	.2925-.2935
FD AFTER PLATING	.2780-.2795	.2810-.2825	.2840-.2855	.2870-.2885	.2900-.2915	.2930-.2945
FD LEAD THREAD	.2714-.2734	.2744-.2764	.2774-.2794	.2804-.2824	.2834-.2854	.2864-.2884
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.062	AN169113	AN169114	AN169115	AN169116	AN169117	AN169118
2.125	AN169119	AN169120	AN169121	AN169122	AN169123	AN169124
2.188	AN169125	AN169126	AN169127	AN169128	AN169129	AN169130
2.250	AN169131	AN169132	AN169133	AN169134	AN169135	AN169136
2.312	AN169137	AN169138	AN169139	AN169140	AN169141	AN169142
2.375	AN169143	AN169144	AN169145	AN169146	AN169147	AN169148
2.500	AN169149	AN169150	AN169151	AN169152	AN169153	AN169154
2.625	AN169155	AN169156	AN169157	AN169158	AN169159	AN169160
2.750	AN169161	AN169162	AN169163	AN169164	AN169165	AN169166
2.875	AN169167	AN169168	AN169169	AN169170	AN169171	AN169172
3.000	AN169173	AN169174	AN169175	AN169176	AN169177	AN169178
3.125	AN169179	AN169180	AN169181	AN169182	AN169183	AN169184
3.250	AN169185	AN169186	AN169187	AN169188	AN169189	AN169190
3.375	AN169191	AN169192	AN169193	AN169194	AN169195	AN169196
3.500	AN169197	AN169198	AN169199	AN169200	AN169201	AN169202
3.625	AN169203	AN169204	AN169205	AN169206	AN169207	AN169208
3.750	AN169209	AN169210	AN169211	AN169212	AN169213	AN169214
3.875	AN169215	AN169216	AN169217	AN169218	AN169219	AN169220
4.000	AN169221	AN169222	AN169223	AN169224	AN169225	AN169226
4.125	AN169227	AN169228	AN169229	AN169230	AN169231	AN169232
4.250	AN169233	AN169234	AN169235	AN169236	AN169237	AN169238
4.375	AN169239	AN169240	AN169241	AN169242	AN169243	AN169244
4.500	AN169245	AN169246	AN169247	AN169248	AN169249	AN169250
4.625	AN169251	AN169252	AN169253	AN169254	AN169255	AN169256
4.750	AN169257	AN169258	AN169259	AN169260	AN169261	AN169262
4.875	AN169263	AN169264	AN169265	AN169266	AN169267	AN169268
5.000	AN169269	AN169270	AN169271	AN169272	AN169273	AN169274
5.125	AN169275	AN169276	AN169277	AN169278	AN169279	AN169280
5.250	AN169281	AN169282	AN169283	AN169284	AN169285	AN169286
5.375	AN169287	AN169288	AN169289	AN169290	AN169291	AN169292

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD. DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION

SIZE

AIR FORCE-NAVY AERONAUTICAL STANDARD

STUD-STEPPED, DRILLED, RECKED, WRENCH PAD, 2 DIA ENGAGEMENT, .3125-18 x .250-28

AN169101 THRU AN169400

E-25-121

PROJECT 5307-0427

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.