
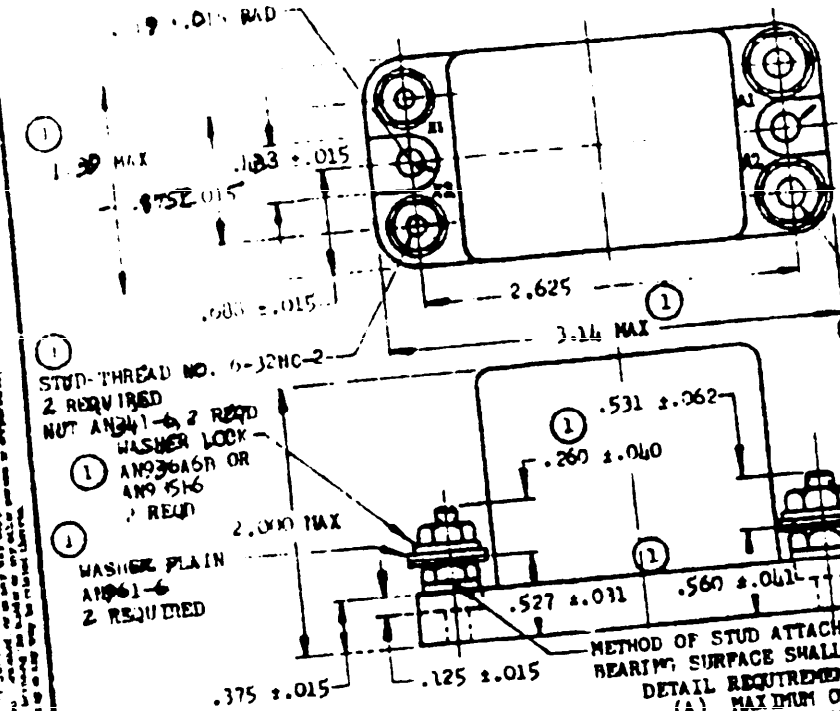


DETAIL REQUIREMENTS:

(A)	MAXIMUM OPERATING VOLTAGE	29 VOLTS
(B)	PICKUP VOLTAGE	16 VOLTS
(C)	DROPOUT VOLTAGE	7 VOLTS +0,-5.5
(D)	RATED LOAD:	
	RESISTIVE	20 AMPERES
	INDUCTIVE	20 AMPERES
	MOTOR	10 AMPERES
(E)	COIL CURRENT	(.25 AMPERES
(F)	MINIMUM OPERATING PERIOD	3 HOURS
(G)	MINIMUM OPERATING CYCLES	25,000
(H)	MAXIMUM WEIGHT	0.5 POUND
(I)	RATED DUTY	CONTINUOUS
(J)	NOMINAL COIL VOLTAGE	28 VOLTS

CIRCUIT



AN PART NO.
AN3319-1

TERMINAL POST HOLES SHALL BE COUNTERBORED AND FILLED WITH SOCKET COMPOUND OR EQUIVALENT.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005.
(1) OVERLOAD, RUPTURE, AND CONTACT DROP OF SPECIFICATION MIL-R-6106 ARE NOT APPLICABLE.

(1) INACTIVE FOR DESIGN AFTER 29 JUNE 1955.
NO SUPERSEDING STANDARD

(1) FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

(1) PROCUREMENT SPECIFICATION: MIL-R-6106

(1) AIR FORCE-NAVY AERONAUTICAL STANDARD
RELAY, 20 AMP, 1PST, NORMALLY CLOSED, UNSEALED, CLASS C

AN3319

SUPERSEDES BUAER DRAWING NO. R-1747

(1) APPROVED 29 Jun 55 REVISED 5 May 59

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.