INCH-POUND

MIL-DTL-14656B (ARMY)
28 April 2003
SUPERSEDING
MIL-DTL-14656A
18 December 1998

DETAIL SPECIFICATION

BUCKLE AND CATCH, CEREMONIAL, ARMY

This specification is approved for use by the Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers belt buckles and catches used with the U.S. Army Ceremonial Uniform for both Officers and Enlisted Personnel (see 6.1).

1.2 Classification. The insignia covered by this specification are of the following types.

Type I - Buckle and Catch, Ceremonial, U.S. Army, Officers
Type II - Buckle and Catch, Ceremonial, U.S. Army, Enlisted Personnel

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government metal set and drawings.

THE INSTITUTE OF HERALDRY, DEPARTMENT OF DEFENSE STANDARD METAL FINISH CHIP SET

Comments, suggestions, or questions on this document should be addressed to Department of the Army, The Institute of Heraldry, Technical and Production Division, 9325 Gunston Road, Building 1466, Room S112, Fort Belvoir, VA 22060-5579 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document.or by e-mailing Stanley.Haas@tioh.belvoir.army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

THE INSTITUTE OF HERALDRY DRAWINGS

B-6-6 - Belt Buckle and Catch, Ceremonial (Ep)
B-6-6A - Belt Buckle & Catch, Ceremonial (Enlisted), Alternate Assembly & Details
B-6-32 - Belt Buckle and Catch, U.S. Army Ceremonial, Officers

(The metal chip set and drawings above should be obtained from the procuring activity or as directed by the contracting officer.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents are those cited in the in the solicitation or contract.

ASTM INTERNATIONAL

ASTM-B487 - Metal and Oxide Coating Thickness by Microscopical Examination of a Cross Section, Measurement of
ASTM-E1282 - Standard Guide for Specifying the Chemical Compositions and Selecting Sampling Practices and Quantitative Analysis Methods for Metals, Ores, and Related Materials

(These standards can be obtained from ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959, website: www.astm.org.)

AMERICAN SOCIETY FOR QUALITY

ANSI/ASQC Z1.4 1993 - Sampling Procedures and Tables for Inspection by Attributes

(Requests for copies of ANSI/ASQC Z1.4 should be addressed to the American Society for Quality, 600 North Plankinton Avenue, Milwaukee, WI 53203-2914, website www.asq.org.

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of' this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Unless otherwise specified (see 6.2), the contracting office shall furnish a standard sample of the buckle which shall be used for matching color and finish only. Variation from this specification may appear in the standard sample; however, in such cases the specification shall govern.

3.2 First article. When specified (see 6.2 and 6.3), a sample shall be subjected to first article inspection in accordance with 4.1.a.

3.3 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

possible provided that the material meets or exceeds the operational and maintenance requirements and promotes economically advantageous life cycle costs.

3.4 Materials. Materials shall be as specified herein.

3.4.1 Copper base alloy. The copper base alloy shall be roll polished, free from pits, scale (including red oxide), dents, nicks, cracks, scratches, segregations, and foreign inclusions that can not be removed in later processing. When tested as specified in 4.3.1 the chemical composition of the copper base alloy shall be as specified in Table I.

TABLE 1. **Chemical composition.**

ALLOY	COPPER	LEAD	IRON (MAX)	ZINC (MAX)	OTHER
Red brass	84.0-86.0	.05	.05	Remainder	.15

3.4.2 Nickel underplating. Nickel for underplating shall be nickel normally used in commercial practice.

3.4.3 Gold for plating. Gold for plating shall be 22 karat or as specified by the contracting office.

3.4.4 Solder.

3.4.4.1 Hard solder. Hard solder shall be a silver alloy solder having a melting point of not less than 1075° Fahrenheit (561.7° Celsius).

3.4.4.2 Soft solder. Soft solder shall be a lead-tin alloy having a melting point of not less than 375° Fahrenheit (190.58° Celsius).

3.4.5 Screw post and thumb nut. Screw post and thumb nut (used on Type II buckles only) shall be fabricated from any type brass and shall conform to the details and dimensions of TIOH Drawing B-6-6 and B-6-6A (Figures 1 and 2).

3.4.6 Rivets. Rivets (used on Type II buckles only) shall be made from any type brass and shall be solid or hollow.

3.5 Design.

3.5.1 Type I buckle. The embossed buckle shall be an exact replica of the design on the Government loaned hub (see 3.6), from which the contractor's working die shall be extracted. The working die shall be tooled and polished to remove any dents, nicks, scratches, or other imperfections.

3.5.2 Type II buckle. The insignia (device) shall be an exact replica of the design on the Government loaned hub (see 3.6), from which the contractor's die shall be extracted. The working die shall be tooled and polished to remove any dents, nicks, scratches, or other imperfections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

3.6 Government loaned property. Hubs for Type I and Type II buckles shall be loaned by the Government and shall be used to make the contractor's working dies. The loaned hub(s) shall be returned upon completion of the contract or as directed by the contracting officer.

3.7. General construction.

3.7.1. Stamping, trimming, and piercing. Buckles and insignia shall be struck in a manner to insure a well-defined die struck edge. When applicable, embossed and/or pierced areas shall be trimmed to the die struck outline. All edges shall be clean and smooth, free from burrs, drag, step, and rough edges. The trimming operation, when applicable, shall not damage or distort the design.

3.7.2 Nickel underplating. Nickel as specified in 3.4.2 shall be plated using a thickness of not less than 0.00025 inch. The plating shall be continuous and unbroken over the entire plated surface. There shall be no cut-through, shaded, peeled, or blistered areas. Testing shall be as specified in 4.3.2.

3.7.3 Gold plating. All gold plating shall be by electroplating methods using gold specified in 3.4.3. The plating shall be continuous and unbroken over the entire plated surface. There shall be no cut-through, shade, peeled, or blistered plating. Plating of screws, thumb nuts, or rivets shall not be required. Testing shall be as specified in 4.3.3.3.

3.7.4 Soldering and electronic fusion. Soldering shall be accomplished using solder specified in 3.4.4.1, 3.4.4.2, or by electronic fusion. Soldered areas shall be clean, smooth, strong, and free from burned or reduced areas. Excess flux or solder shall be removed. Testing of hard solder shall be as specified in 4.3.3.4.

3.8 Details of construction for the Type I buckle. The embossed buckle shall be constructed in accordance with the details and dimensions shown in drawing B-6-32 (Figure 3). The buckle shall be made from red brass specified in 3.4.1.

3.8.1 Use of forcer. A forcer shall be used to bring up the embossed design of the Type I buckle. When a forcer is used, the back of the buckle shall have no sharp or rough edges or sharp corners. The impression of the forcer shall be regular and symmetrical upon the face of the buckle. Sufficient metal shall be left near the edges to assure a clean and smooth trimming.

3.8.2 Dapping. The dap for the Type I buckle is built into the Government hub.

3.8.3 Finishing. Finishing shall be accomplished prior to assembly. All components of the Type I embossed buckle shall be nickel underplated and gold plated using materials specified in 3.4.2 and 3.4.3. The face of the buckle shall be matte finished with polished highlights. The face of the catch plate shall be mirror-like polished. The plated color/shade of all finished components of the Type I buckle shall match.

3.8.4 Type I assembly.

3.8.4.1 Buckle assembly. The buckle assembly shall consist of the embossed buckle, a loop with sliding bar, and a hook. The loop with sliding bar and the hook, like the embossed buckle, shall be fabricated from red brass specified in 3.4.1 to the details and

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

dimensions shown in TIOH Drawing B-6-32 (Figure 3). The loop and hook shall be hard soldered to the back of the buckle plate in the locations shown. Care should be taken to assure free movement of the sliding bar.

3.8.4.2 Catch plate assembly. The catch plate with loop and sliding bar shall be fabricated from red brass specified in 3.4.1 and shall conform to the details and dimensions shown on TIOH Drawing B-6-32 (Figure 3). The loop shall be hard soldered to the catch plate. Care should be taken to assure free movement of the sliding bar.

3.9 Details of construction for the Type II buckle. The insignia and buckle plate for the Type II buckle shall be fabricated from red brass specified in 3.4.1 and shall conform to the details and dimensions shown in TIOH Drawing B-6-6 (Figure 1). The finished insignia shall have a thickness of not less than 3/64 inch at the shield.

3.9.1 Use of forcer. A forcer shall be used to bring up the design details of the insignia. When a forcer is used, the back of the insignia shall have no sharp or rough edges or sharp corners. The impression of the forcer shall be regular and symmetrical upon the face of the insignia. Sufficient metal shall be left near the edges to assure a clean and smooth trimming.

3.9.2 Dapping. The buckle plate for the Type II buckle shall be dapped to a radius of from 3 to 5 inches. The contour of the insignia shall be dapped to fit the contour of the buckle plate.

3.9.3 Finishing. Finishing shall be accomplished prior to assembly. All components of the Type II buckle (except screws, thumb nuts, and rivets) shall be nickel underplated and gold plated using materials specified in 3.4.2 and 3.4.3. The insignia for the Type II buckle shall be matte finished with polished highlights. The face of the buckle plate and the catch plate shall be mirror-like polished. The plated color/shade of all finished components of the Type II buckle shall match.

3.9.4. Type II assembly.

3.9.4.1 Insignia to buckle plate assembly. The insignia shall be mounted on the front of the buckle plate by any of the following three methods:

- Two brass screw posts shall be hard soldered or electronically fused in place on the insignia (see TIOH Drawing B-6-6, Figure 1) and inserted through corresponding countersunk holes in the buckle plate. The buckle plate and emblem shall be held together by thumb nuts threaded onto the screw posts. The location of screw posts shall be as shown in Figure 1 and shall center the insignia on the face of the buckle plate.

- Rivets may used as an alternate attaching method and shall be hard soldered or electronically fused in place on the insignia and inserted through corresponding holes in the buckle plate. The rivets shall then be securely swedged to ensure a tight and close fit between the buckle plate and the insignia. The location of rivets shall be as appropriate to center the emblem on the face of the buckle plate.

- Soft solder also may be used as an alternate method of holding the buckle plate and the emblem together provided that the emblem is centered on the face of the buckle plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

3.9.4.2 Loop and hook assembly. The loop with sliding bar and the hook shall be fabricated from red brass specified in 3.4.1 to the details and dimensions shown in TIOH Drawing B-6-6 or B-6-6A (Figures 1 and 2). The loop and hook shall be hard soldered to the back of the buckle plate in the locations shown. Care should be taken to assure free movement of the sliding bar.

3.9.4.3 Catch plate assembly. The catch plate with loop and sliding bar shall be fabricated from red brass specified in 3.4.1 and shall conform to the details and dimensions shown in TIOH Drawings B-6-6 or B-6-6A (Figures 1 or 2). The loop shall be hard soldered to the catch plate in the location(s) shown. The loop for Type II may be fabricated from flat or round stock at the option of the manufacturer. Care should be taken to assure free movement of the sliding bar.

3.10 Marking. The contractor shall stamp his trademark or other identifying mark legibly but inconspicuously on the back of the buckle hook. There shall be no signs of penetration or unevenness on the surface opposite the marked area. The marking shall not distort any part of the buckle.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection. Inspection and testing of the first article (see 3.2) shall be made of a completely finished item or items for all provisions of this specification applicable to the end product examination and tests (see 4.3.3).

b. Conformance inspection. Inspection shall be in accordance with the provisions set forth herein, except where otherwise indicated (see 6.2). Sampling for inspection shall be performed in accordance with ANSI/ASQC Z1.4.

4.2 Inspection conditions. Unless otherwise stated, all inspections shall be performed in accordance with the test conditions specified in 4.3. Unless otherwise stated, a contractor's certificate of compliance may be accepted as proof of conformance. However, the Government reserves the right to perform any of the inspections set forth in this specification where it deems them necessary to insure the correctness and quality of the product.

4.3 Tests and inspections.

4.3.1 Testing of components. Chemical composition of the red brass (copper-based alloy) detailed in Table I shall be determined in accordance with the guidelines provided in ASTM-1282. Results shall be reported to the nearest 0.1% and shall be evaluated to determine compliance with the requirements specified in 3.4.1.

4.3.2 In-process inspection. In-process inspection shall be made at any point or during any phase of the manufacturing process to determine whether requirements, operations, or assemblies are accomplished as specified. Table II lists requirements, operations, or assemblies subject to in-process inspection. The Government reserves the right to exclude from consideration for acceptance any of the following for which in-process inspection has indicated nonconformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

TABLE II. **In-process inspection**.

REQUIREMENT, OPERATION, OR ASSEMBLY	RQM'T PARAGRAPH¶
Nickel underplating of buckle components	3.7.2 ✳
Gold plating of buckle components	3.7.3
Soldering of screw posts or rivets to back of insignia (Type II buckle)	3.7.4, 3..4.1
Thickness of metal for buckle plate (Type II buckle)	Dwg B-6-6
Thickness of metal for insignia (Type II buckle)	3.9

✳ Testing shall be standard commercial. In case of a dispute, testing shall be in accordance with ASTM-B487.

4.3.3. End item inspections and tests.

4.3.3.1 Visual examination of buckles. Examination of buckles for defects in finish, design, material, construction, workmanship, and marking shall be made using Table III. Examination shall be made at a distance of approximately 18-24 inches with illumination equal to average daylight and arranged so as to avoid as much reflected light as possible. Defects designated by an asterisk (✳) shall be classified as critical when seriously affecting appearance or serviceability and minor when affecting appearance or serviceability but not seriously. The product unit for the examinations shall be one completely fabricated buckle. Sampling for inspections shall be as specified in 4.1.b.

TABLE III **Defects.**

EXAMINE	DEFECT	CLASSIFICATION		
		CRITICAL	(✳)	MINOR
Color & finish	Color & finish of buckle does not compare favorably with the standard sample and/or the requirements of the specification …….		✳	
	Pits, scale, pin holes, crack, rupture, segregation, or foreign inclusion …….		✳	
	Buff, drag, or cloudy finish …….		✳	
	Any plated area cut-through, shaded, peeled, or blistered ……..	X		
	Discoloration such as spot, stain, or speck …		✳	
	Not clean; foreign matter imbedded …….		✳	
Plating	Not gold plated …….	X		
	Not gold plating required by spec or contract .	X		
	Not nickel underplated …….	X		
	Not type required by the contract……..	X		
	Not smooth, continuous, or adherent ……..	X		
	Cut through or porous …….	X		
Design	Details altered, does not conform to Government hub or drawing …….	X		
	Any detail struck over resulting in double impression ……..	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		CRITICAL	(✳)	MINOR
	Any significant detail marred, missing, reduced, obliterated, or unclear ……		✳	
	Any area not pierced as indicated by drawing (Type II only) ……..	X		
	Any warp, twist, or distortion producing irregular surface contour or outline …….	X		
	Not dapped as indicated by drawing or specification ……..	X		
Construction & Workmanship	Metal marks such as nicks, cracks, dents, digs, gouges, or scratches ……..		✳	
	Not trimmed to die-struck edge ……			X
	Die struck edge not well defined ……..			X
	Edge not die-struck …….		✳	
	Pinhole, crack, or rupture ……..		✳	
	Any sharp or rough edge, burr, drag or step, or tool marks …….		✳	
	Insignia not closely dapped to fit contour of buckle (Type II only)……..	X		
	Any component missing, bent, twisted, broken, deformed, or otherwise impaired ……	X		
	Not pierced when/where required (Type II only)……	X		
	Piercing not clean & smooth (Type II only) …		✳	
	Piercing operation distorts insignia (Type II only) ……	X		
	Insignia out of alignment …….	X		
	Insignia not securely mounted on the buckle (Type II only)…….	X		
	Penetration of marking to opposite surface, unevenness, or distortion …….	X		
Soldering	Component parts not joined adequately by soldering……	X		
	Joints not clean and smooth, i.e., flux or excess solder not removed ……			X
	Any area burned or reduced in soldering or acid cleaning ……..		✳	
.	Not silver solder when required, i.e. wrong type of solder……..	X		
Marking	Missing, illegible, incorrect, or incomplete …..			X
	Conspicuously placed ……		✳	

4.3.3.2 Examination of the buckle for defects in dimensions. Any dimension which is not as given in the specification or the drawing shall be classified as "(✳)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

4.3.3.3. Acid test for gold plating (see 3.7.3). Acid testing shall be performed on a completely fabricated buckle as follows:

Place a drop of nitric acid of not less than 1/16 inch in diameter on three different spots on the front face of the buckle allowing the drops to remain for not less than one (1) minute during which time the surface of the buckle shall be inspected to determine compliance with the requirements of 3.4.3 and 3.7.3. A minimum of two spots must withstand the acid test. The test acid shall be applied at room temperature (60 to 80 degrees Fahrenheit) and shall consist of a solution containing 50 percent by volume of chemically pure nitric acid (specific gravity 1.42) and an equal volume of distilled water.

4.3.3.4 Test for hard soldered joints (see 3.7.4). Hard soldered joints to be tested shall be placed in an oven maintained at 1075 degrees Fahrenheit ± 5 degrees Fahrenheit for not less than 15 minutes. While at this temperature, the items shall be lifted by the smaller of the soldered components and the joints examined. The soldered areas shall not separate.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The buckles covered by this specification are intended to be used as an accessory to the uniforms worn by officers and enlisted personnel of honor units and the Army Band during formal military ceremonies.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number (including revision letter), and date of this specification.
b. Type of buckle required (see 1.2).
c. Specific issue(s) of other documents referenced (see 2.3).
d. Specific drawings referenced (see 2.2).
e. Whether a standard sample is to be furnished (see 3.1).
f. When/if a first article is not required (see 3.2).
g. Special requirements for or exceptions to testing and inspections (see Section 4.)

6.3 First article. When first article inspection is required (see 3.2), the contracting officer should provide specific guidance to offerors whether the item should be a

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

preproduction sample, a first production sample, or a standard production item from the contractor's current inventory. The first article should consist of one completed item. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or tests, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4. Government loaned property. The contracting officer should arrange to loan the property listed in 3.6.

6.4 Subject term (key word) listing.

Catch plate
Dap
Embossed
Forcer
Insignia
Loop
Sliding bar

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Preparing activity:
Army - IH

Review activities:
Army - GL
DLA - CT

(Project No. 8315-0424/001)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

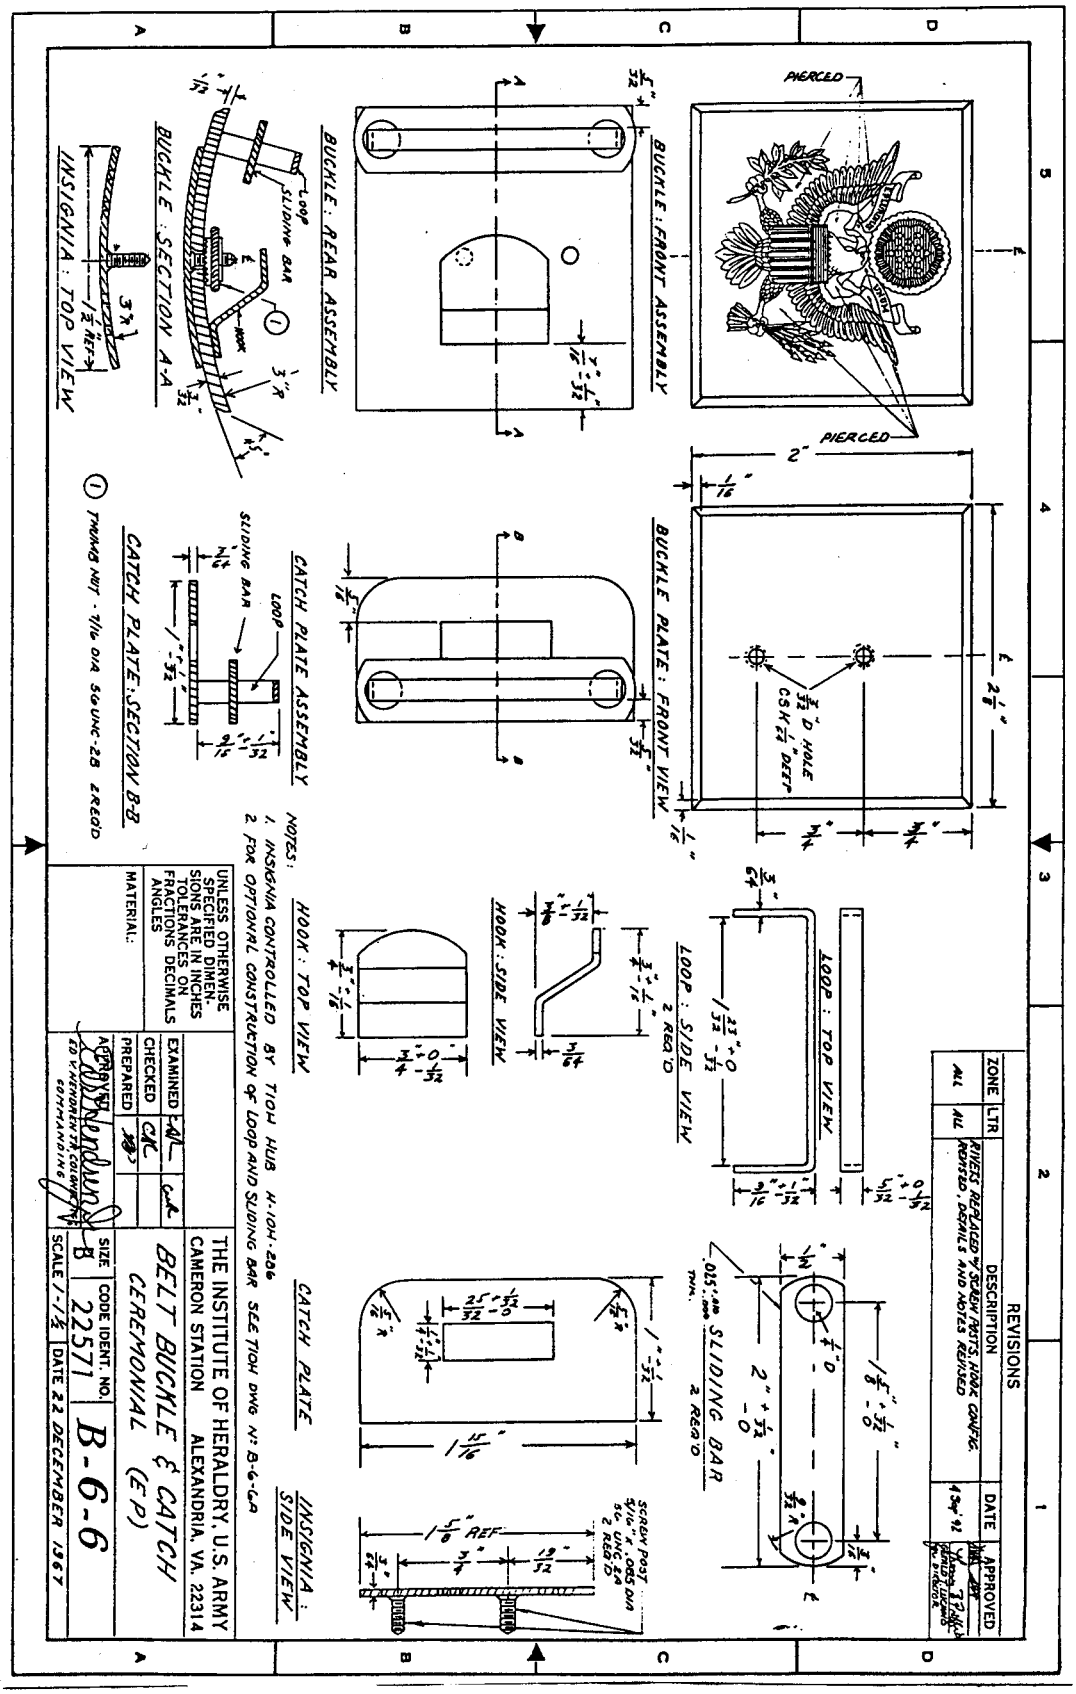


FIGURE 1. **Belt buckle and catch, ceremonial (ep)**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

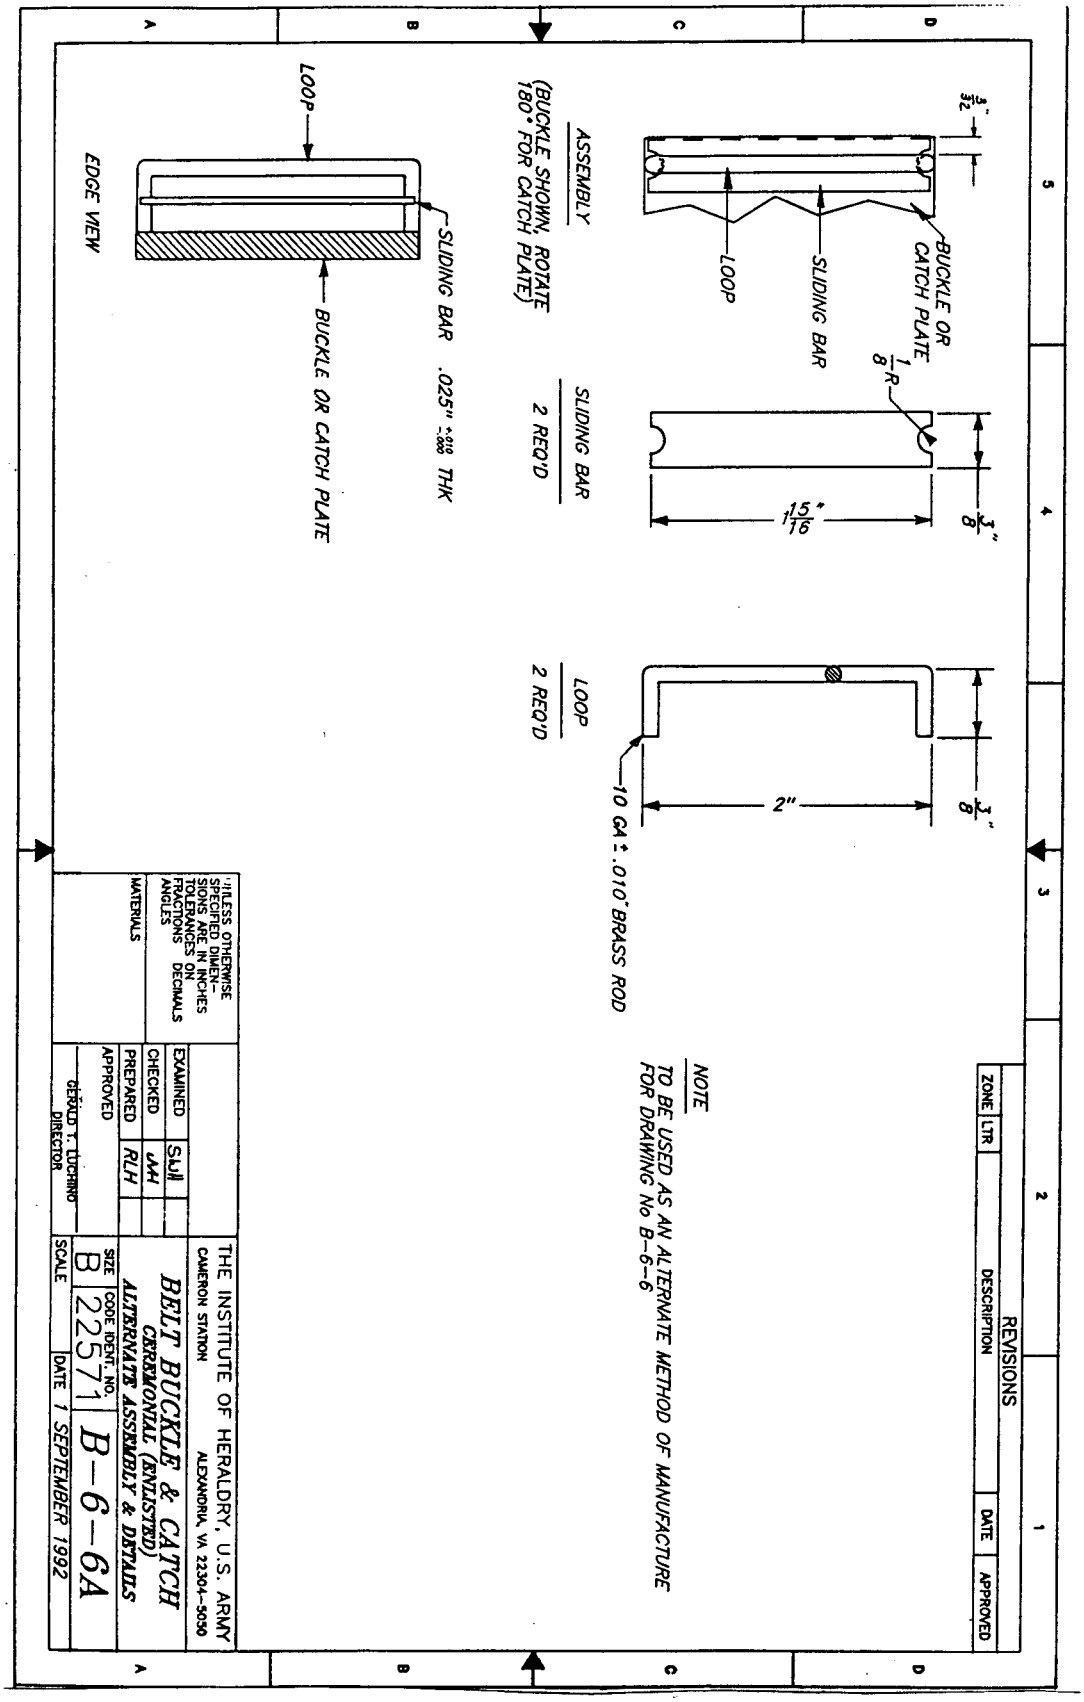


FIGURE 2. **Belt buckle & catch, ceremonial (enlisted), alternate assembly & details**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

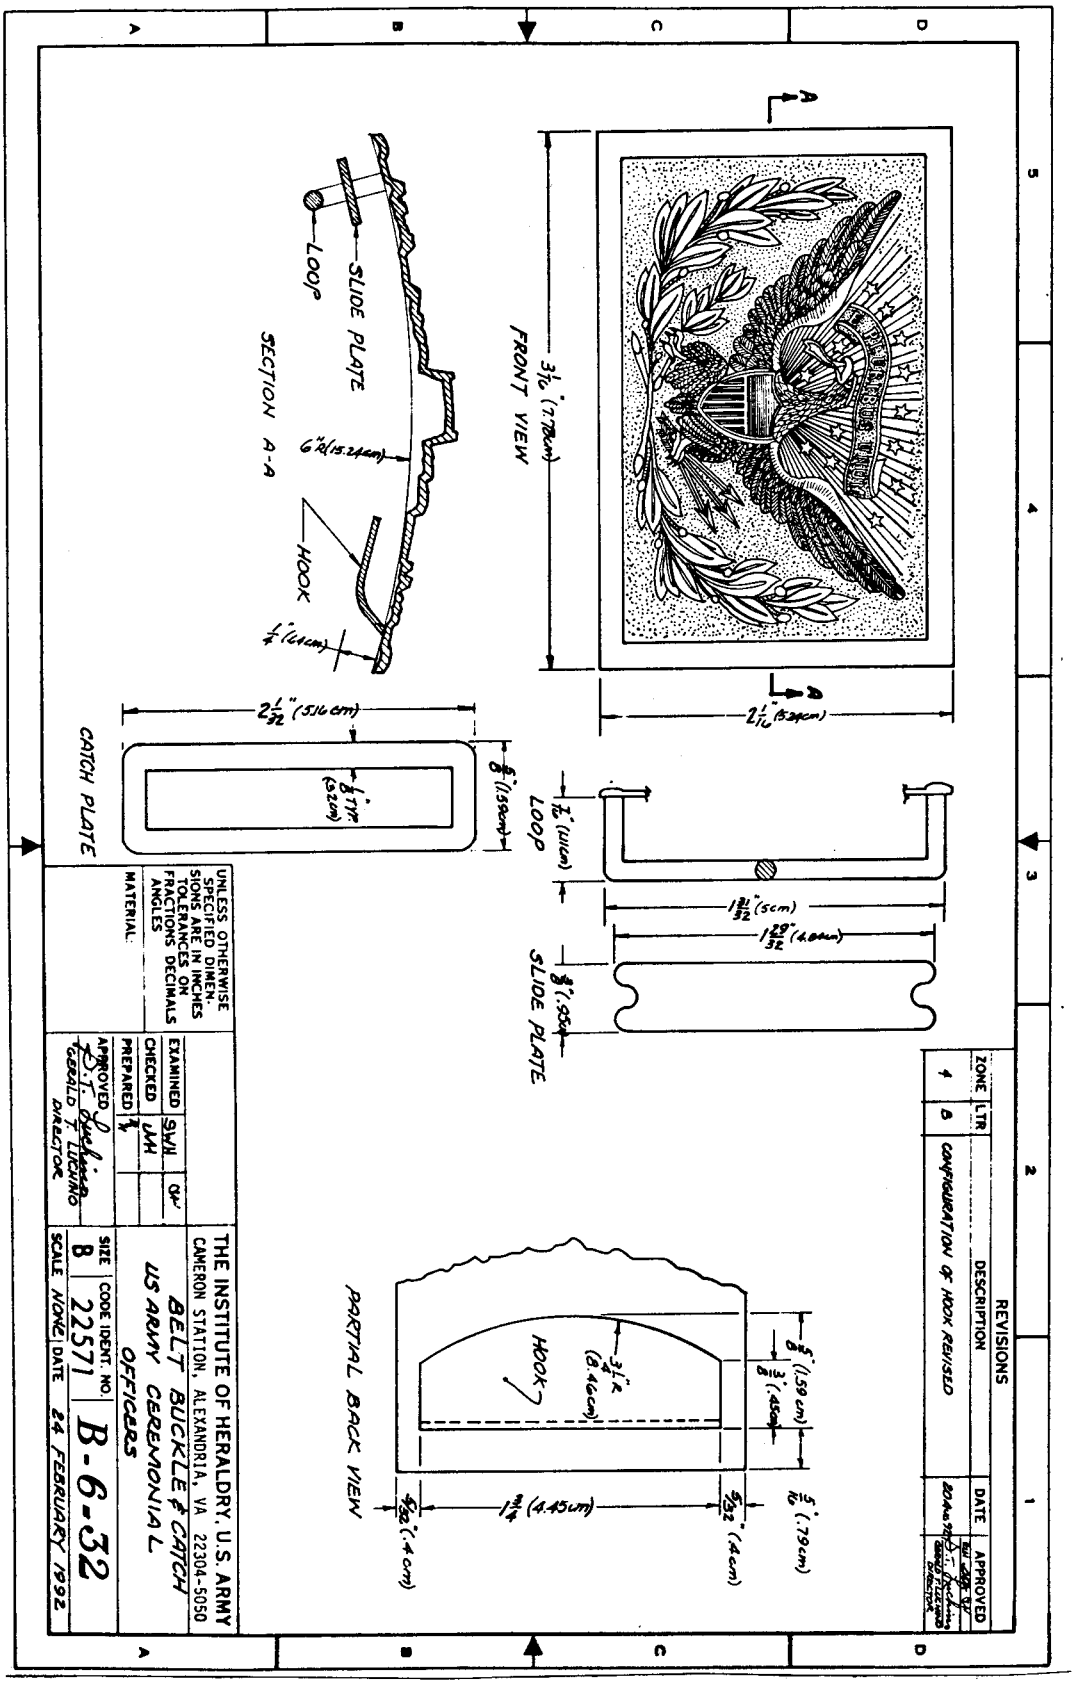


FIGURE 3. **Belt buckle & catch, U.S. Army ceremonial, officers**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-DTL-14656B (ARMY)	2. DOCUMENT DATE (YYYYMMDD) 20030428

3. DOCUMENT TITLE BUCKLE AND CATCH, CEREMONIAL, ARMY

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7.DATE SUBMITTED** (YYYYMMDD)

8. PREPARING ACTIVITY

NAME The Institute of Heraldry, Dept. of the Army	b. TELEPHONE *Include Area Code)* (1) Commercial 703-806-4982 or 4984	(2) AUTOVON 656-4982 or 4984
c. ADDRESS *(Include Zip Code)* Technical and Production Division 9325 Gunston Rd., Bldg. 1466, Rm S-112 Fort Belvoir, Virginia 22060-5579	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman road, Suite 2533, Ft. Belvoir, VA 22060-2533 Telephone (703) 767-6888 AUTOVON 427-6888	

DD Form 1426, FEB 1999 (EG) *PREVIOUS EDITION IS OBSOLETE* *WHS/DIOR, Feb 99*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.