INCH-POUND

MIL-DTL-14657
4 May 2001

# MILITARY SPECIFICATION

# SHOULDER CORD, JUNIOR ROTC, ARMY

Inactive for new design after 1 May 2001.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14651 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

## 1. SCOPE

1.1 Scope. This specification covers shoulder cords worn by cadets in the Army Junior Reserve Officer Training Corps.

1.2. Classification. The shoulder cords covered by this specification are of the following types (see 6.2):

Type I - White
Type II - Scarlet
Type III - Teal Blue
Type IV - Buff
Type V - Old Gold
Type VI - Emerald
Type VII - Black
Type VIII - Orange

## 2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in preparing this document should be addressed to: Director, The Institute of Heraldry, US Army, 9325 Gunston Road, Room S112, Fort Belvoir, VA 22060-5579, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

FEDERAL SPECIFICATIONS

A-A-52094 - Thread, Cotton

FEDERAL STANDARDS

FED-STD-191 - Textiles, Test Methods

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, DODSSP, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094. Or visit the DODSSP web site at http://astimage.daps.dla.mil for online access to standardization documents.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

THE INSTITUTE OF HERALDRY DRAWING

B-10-14 - Shoulder Cord, Junior ROTC, Army

(Copies of drawings required by the contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.3 Non-Government publications and references. The following documents form a part -of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are issues of the documents cited in the solicitation (see 6.2)

(Non-government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other information services.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

AATCC-16 - Colorfastness to Light
AATCC-61 - Colorfastness to Laundering, Home and Commercial: Accelerated

(These standards can be obtained from the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, NC 27709.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR QUALITY CONTROL

ANSI/ASQC Z1.4 1993 - Sampling Procedures and Tables for Inspection by Attributes

(This standard can be obtained from the American Society for Quality Control, 611 East Wisconsin Avenue, Milwaukee, WI 53202.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM-E1282 - Standard Guide for Specifying the Chemical Compositions and Selecting Practices and Quantitative Analysis Methods for Metals, Ores, and Related Materials

(These standards can be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

IRA GREEN, INC.

DOD Standard Shades for Heraldic Yarns for Embroidery and Ribbons, 1993 Edition

(This publication can be obtained from Ira Green, Inc., 177 Georgia Avenue, Providence, RI 02905.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

## 3. REQUIREMENTS

3.1 First article. When specified [in the contract or purchase order (see 6.2)], a sample shall be subjected to first article inspection in accordance with 4.1. The first article shall be manufactured by the contractor in the same manner and in the same facilities as those used for the production items.

3.2 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmental preferable materials should be used to the maximum extent possible provided that the material meets or exceeds operational and maintenance requirements and promotes economically advantageous life cycle costs.

3.3 Materials. Materials shall be as specified herein.

3.3.1 Yarn.

3.3.1.1 Cotton core. The stuffer yarn for the cord shall be 4/4 cotton.

3.3.1.2 Rayon cover. When rayon is used for the cord and loop cover, the yarn shall be a continuous filament, regenerated cellulose type rayon yarn, 450 denier with 60 to 100 filaments. The yarn for the cord and loop shall be 450/3 ply with 6 ± 1 turn per inch.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

3.3.1.3 Nylon cover. When nylon is used for the cord and loop cover, the yarn shall be a continuous filament, bright nylon of 420 denier having a minimum of 68 filaments. The yarn for the cord shall be 420/3 ply with 6 ± 1 turn per inch. The yarn for the loop shall be 420/2 ply with 6 ± 1 turn per inch.

3.3.1.4 Color. Colors shall be as shown in TABLE I. (Reference the Department of Defense Standard Shades for Heraldic Yarns for Embroidery and Ribbons.)

TABLE I. **Colors.**

| TYPE | CORD COVER | COLOR LOOP | CORD |
|---|---|---|---|
| | | | |
| I | White, HA 67101 | White, HA 67101 | White, HA 67101 |
| II | Scarlet, HL 67111 | Scarlet, HL 67111 | Scarlet, HL 67111 |
| III | Teal Blue, HV 67121 | Teal Blue, HV 67121 | Teal Blue, HV 67121 |
| IV | Buff, HAK 67135 | Buff, HAK 67135 | Buff, HAK 67135 |
| V | Old Gold, HE 67105 | Old Gold, HE 67105 | Old Gold, HE 67105 |
| VI | Emerald, HAC 67128 | Emerald, HAC 67128 | Emerald, HAC 67128 |
| VII | Black, HAN 67138 | Black, HAN 67138 | Black, HAN 67138 |
| VIII | Orange, HK 67110 | Orange, HK 67110 | Orange, HK 67110 |

3.3.2 Lacquer. The lacquer shall be a pale, clear, synthetic lacquer. The use of pigmented lacquer shall not be permitted.

3.3.3 Copper base alloy. The copper base alloy shall be roll polished, free from pits, scale (including red oxide), dents, nicks, cracks, scratches, segregation, and foreign inclusions that can not be removed in later processing. When tested as specified in 4.3.1, the copper content of the applicable copper base alloy shall be as specified in Table II.

TABLE II. **Copper content of copper base alloy**.

| ALLOY | COPPER |
|---|---|
| Yellow Brass | 64.0%-68.5% |
| Red Brass | 84.0%-86.0% |
| Free Cutting Brass | 60.0%-63.0% |
| Low Brass | 78.5%-81.5% |

3.3.4 Thread.

3.3.4.1 End loop cord. Thread for stitching the loop cord shall conform to Type I, Ticket 50, 3 Ply of A-A-52094.

3.3.4.2 Buttonhole cord. The thread for stitching the buttonhole loop to the plaited cord shall conform to Type III, Ticket C, 3 Ply of A-A-52094.

3.3.5 Color.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

3.3.5.1 Yarn color. All yarns, including the rayon or nylon cover yarn and cotton core yarn, shall be dyed as specified in TABLE I. The use of sulfur dyes and dyes containing elementary sulfur or compounds capable of oxidation to sulfuric acid is prohibited.

3.3.5.2 Matching colors. Colors shall match the approved shades under artificial daylight having a color temperature of 7500 ± 500 degrees Kelvin.

3.3.5.3 Colorfastness. The rayon or nylon cover yarn shall show fastness to laundering, wet-dry cleaning, and light. The cotton core yarn shall show fastness to laundering and wet-dry cleaning. All tests shall show not less than good fastness when compared against the colors specified in TABLE I after testing as specified in 4.3.1.

3.3.5.4 Thread. All stitching thread shall match the color of the loop yarns specified in TABLE I. When tested as specified in A-A-52094, the dyed thread shall show good fastness to laundering, wet dry cleaning, and light.

3.3.6 Ferrule and ring. The ferrule and ring shall be made from any type brass specified in 3.3.3 and shall conform to the details and dimensions shown in Figure 1.

3.4 Construction. The shoulder cord shall be made from a single piece of braided plaiting cord specified in 3.4.1 and in accordance with the details and dimensions shown in Figure 1 and the requirements specified herein.

3.4.1 Braided plaiting cord. The finished cord shall consist of a braided tubular rayon or nylon cover specified in 3.3.1.2 and 3.3.1.3 over a cotton core stuffer specified in 3.3.1.1. Sufficient ends of the cotton yarn shall be used to ensure the finished cord is round, firm, and 7/32 inch ± 1/32 inch in diameter. The rayon or nylon cover shall be braided on a 16 carrier machine, 1 end per carrier, with not less than 24 picks per inch in a 2 over, 2 under, plain braid.

3.4.2 End loop cord and buttonhole cord. The finished end loop cord and buttonhole cord shall consist of a tubular braided rayon or nylon cover over sufficient cotton core stuffer yarn to ensure a diameter of 3/32 inch ± 1/32 inch.

3.4.3 Shoulder cord construction. The rayon or nylon covered braided cord shall be plaited in accordance with the design shown in Figure 1:

- With a single piece of braided cord specified in 3.4.1, begin at one free end and, by using a loop and buttonhole cord specified in 3.4.2, form an end loop 1-3/8 inches ± 1/8 inch. Secure the loop by stitching and wrapping the free end with not less than 10 turns of loop and buttonhole cord for an area of 1 inch ± 1/8 inch. Use stitching thread specified in 3.3.4.1.
- From the wrapping above, allow 2-1/4 inches ± 1/4 inch of plain braided cord.
- Then plait the braided plaiting cord for 26 inches ± 2 inches using 50 ± 2 plaits.
- From the end of the plaiting, allow 5 inches ± 1/2 inch of plain braided cord.
- Then knot the plain braided cord 4 times, making the knotted area 1 inch ± 1/8 inch in width.
- Midway between the plaited section and the knotted section, form a buttonhole loop with a minimum of 4-1/4 inches of loop cord. The buttonhole shall measure 1 inch ± 1/8 inch. Insert the loop underneath the tubular braid a minimum of 1 inch; then sew it securely to the braided cord with thread specified in 3.3.4.2. Testing shall be as specified in 4.3.2.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

- Place ring on cord; then secure the ferrule on the end of the cord by stitching through the 4 holes in the ferrule so as to ensure a force fit for the ring 2-5/8 inches ± 1/4 inch from the 4 knots.

3.4.4. Ferrule and ring. The ferrule and ring shall be mirror-like polished and shall be completely coated with lacquer or a lacquer-like finish specified in 3.3.2. Testing of lacquer shall be as specified in 4.3.2.2.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection. Inspection and testing of the first article (see 3.1) shall be made of a completely finished item or items for any or all provisions of this specification applicable to the end product examination and tests.

b. Conformance inspection. Inspection shall be in accordance with the provisions set forth herein, except where otherwise indicated (see 6.2). Sampling for inspection shall be performed in accordance with ANSI/ASQC Z1.4.

4.2 Inspection conditions. Unless otherwise stated, all inspections shall be performed in accordance with the conditions specified in 4.3.

4.3 Methods of inspection.

4.3.1 Testing of components. Except as otherwise stated in TABLE III, testing of components shall be in accordance with the stated test method from FED-STD-191.

TABLE III. **Testing of components.**

| COMPONENT | CHARACTERISTIC | RQM'T | TEST METHOD | RESULTS REPORTED AS |
|---|---|---|---|---|
| Rayon yarn for cord & loop covers | material identification | 3.3.1.2 | standard commercial | pass or fail |
| | ply | 3.3.1.2 | standard commercial | pass or fail |
| | denier | 3.3.1.2 | standard commercial | to nearest denier |
| | continuous filament | 3.3.1.2 | standard commercial | pass or fail |
| | number of filaments | 3.3.1.2 | standard commercial | pass or fail |
| | presence of sulfur | 3.3.5.1 | 2020 **1**/ | pass or fail |
| | colorfastness to | | | |
| | laundering | 3.3.5.3 | AATCC-61, Test 1A | pass or fail |
| | wet-dry cleaning | 3.3.5.3 | 5622 | pass or fail |
| | light **2**/ | 3.3.5.3 | AATCC-16, Option A | pass or fail |
| Nylon yarn for cord & loop covers | material identification | 3.3.1.3 | standard commercial | pass or fail |
| | ply | 3.3.1.3 | standard commercial | pass or fail |
| | denier | 3.3.1.3 | standard commercial | to nearest denier |
| | continuous filament | 3.3.1.3 | standard commercial | pass or fail |
| | number of filaments | 3.3.1.3 | standard commercial | pass or fail |
| | presence of sulfur | 3.3.5.1 | 2020 **1**/ | pass or fail |
| | colorfastness to | | | |
| | laundering | 3.3.5.3 | AATCC-61, Test 1A | pass or fail |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

TABLE III. **Testing of components** - continued

| | | | | |
|---|---|---|---|---|
| | wet-dry cleaning<br>light **2**/ | 3.3.5.3<br>3.3.5.3 | 5622<br>AATCC-16, Option A | pass or fail<br>pass or fail |
| Cotton core<br>stuffer yarn | material identification<br>size<br>presence of sulfur<br>colorfastness to<br>laundering<br>wet-dry cleaning | 3.3.1.1<br>3.3.1.1<br>3.3.5.1<br><br>3.3.5.3<br>3.3.5.3 | standard commercial<br>standard commercial<br>2020 **1**/<br><br>AATCC-61, Test 1A<br>5622 | pass or fail<br>pass or fail<br>pass or fail<br>pass or fail<br>pass or fail<br>pass or fail |
| Braided<br>plaiting cord | diameter<br>tubular<br>number of carrier<br>ends per carrier<br>picks per inch<br><br>weave | 3.4.1<br>3.4.1<br>3.4.1<br>3.4.1<br>3.4.1<br><br>3.4.1 | visual<br>visual<br>visual<br>visual<br>visual<br><br>visual | nearest 1/32 inch<br>pass or fail<br>nearest whole no.<br>nearest whole no.<br>nearest whole no.<br>estimate<br>pass or fail |
| Ferrule & ring | material identification<br>lacquer | 3.3.6<br>3.4.4 | ASTM-E1282 **1**/<br>standard commercial | nearest 0.1%<br>pass or fail |

**1**/ Requirements accepted on basis of manufacturer's certificate of compliance.
**2**/ The time exposure shall be 80 standard fading hours.

4.3.2 Other applicable tests.

4.3.2.1 Test for end loop and buttonhole loop. After both loops have been completed as specified in 3.4.3, a force of 20 pounds shall be applied to the end of each loop separately for a period of one (1) minute. The loops shall then be examined to determine that neither loop shows signs of pulling loose.

4.3.2.2 Test for tackiness of lacquer. After ensuring that the ferrule and ring have been coated with lacquer as specified in 3.4.4, perform the following test: At room temperature (60° to 80° Fahrenheit), press a piece of tissue paper against the lacquered surfaces of the ferrule and ring for 15 seconds, using any pressure capable of being exerted between thumb and two fingers. Then remove the tissue paper and inspect the ferrule and ring to be sure that no tissue paper has adhered to either.

4.3.2.3 Test for length of plaited section and overall length. The finished shoulder cord shall not be stretched or tensioned prior to testing. Test by suspending the shoulder cord vertically under a load of 10 ounces and then measuring it for compliance with the dimensions given in Figure 1 and 3.4.3.

4.3.3 Visual inspection of the end item. Visual examination of the completely finished item shall be made using the guidelines given in TABLE IV. Examination shall be made at a distance of approximately 16-22 inches with illumination equal to average daylight and arranged so as to avoid as much reflected light as possible. Defects designated by an asterisk (✳) shall be classified as major when seriously affecting appearance or serviceability and minor when affecting appearance or serviceability but not seriously.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

TABLE IV. **Visual examination of the end item.**

| EXAMINE | DEFECT | CLASSIFICATION | | |
|---|---|---|---|---|
| | | MAJOR | (*) | MINOR |
| Cord & loop materials | Color or shade not as specified. . . . . | X | | |
| | Not fabricated from the specified material. . . . . | X | | |
| | Spotted, stained, discolored or soiled. . . . . | X | | |
| | Objectionable odor. . . . . | | | X |
| Construction & workmanship: braided plaiting cord | Unevenly braided. . . . . | X | | |
| | Cut or torn. . . . . | X | | |
| | Broken/missing end or pick. . . . . | X | | |
| | Pulled yarns. . . . . | | * | |
| | Frayed edge. . . . . | | * | |
| | Core not completely covered. . . . . | X | | |
| | Cord out of round. . . . . | | * | |
| | Cord not continuous length, i.e., pieced. . . . . | X | | |
| Construction & workmanship: plaiting & knotting of cord | Plaiting not as specified and as shown in Figure 1. | X | | |
| | Unevenly or loosely plaited or knotted. . . . . | X | | |
| | Straight plaiting has less than 48 or more than 52 plaits. . . . . | X | | |
| | Knot missing or not as specified/shown in Fig. 1. . | X | | |
| Construction & workmanship: end loop & buttonhole loop | Loop missing. . . . . | X | | |
| | Loop not securely attached. . . . . | X | | |
| | Tacking not neatly accomplished. . . . . | | * | |
| | Color or shade of stitching thread not as specified. | | | X |
| | Thread ends not neatly trimmed. . . . . | | | X |
| | Loop in wrong location. . . . . | X | | |
| Construction & workmanship: ferrule & ring | Ferrule or ring missing. . . . . | X | | |
| | Ferrule not securely attached. . . . . | X | | |
| | Ring loose on ferrule (ring falls completely away from ferrule when ferrule is inverted). . . . . | X | | |
| | Not correct finish. . . . . | X | | |
| | Not lacquered as required. . . . . | X | | |
| | Quality of metal unacceptable, i.e., surface pitted, scaled, dented, nicked, cracked, scratched. . . . . | | * | |

4.3.4 Examination of dimensions. Any dimension that is outside the allowed tolerance shall be classified as a major defect.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

## 6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Type required (see 1.2).
c. Drawing number (see 2.2.2).
d. Issue of DoDiss to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.2.1).
e. When a first article is required (see 3.1).
f. Packaging requirements (see 5.1).

6.2 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.3 First article. When first article inspection is required (see 3.1), the contracting office should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first production sample, or a standard production item from the contractor's current inventory. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or tests, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Government furnished property. The contracting office should arrange to furnish the drawing required in 6.2.

6.5 Subject term (key word) listing.

Alloy
Carrier
Copper
Cord, braided
Cord, plaiting
Ferrule
Lacquer
Stuffer yarn



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH

Review Activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0046/001)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

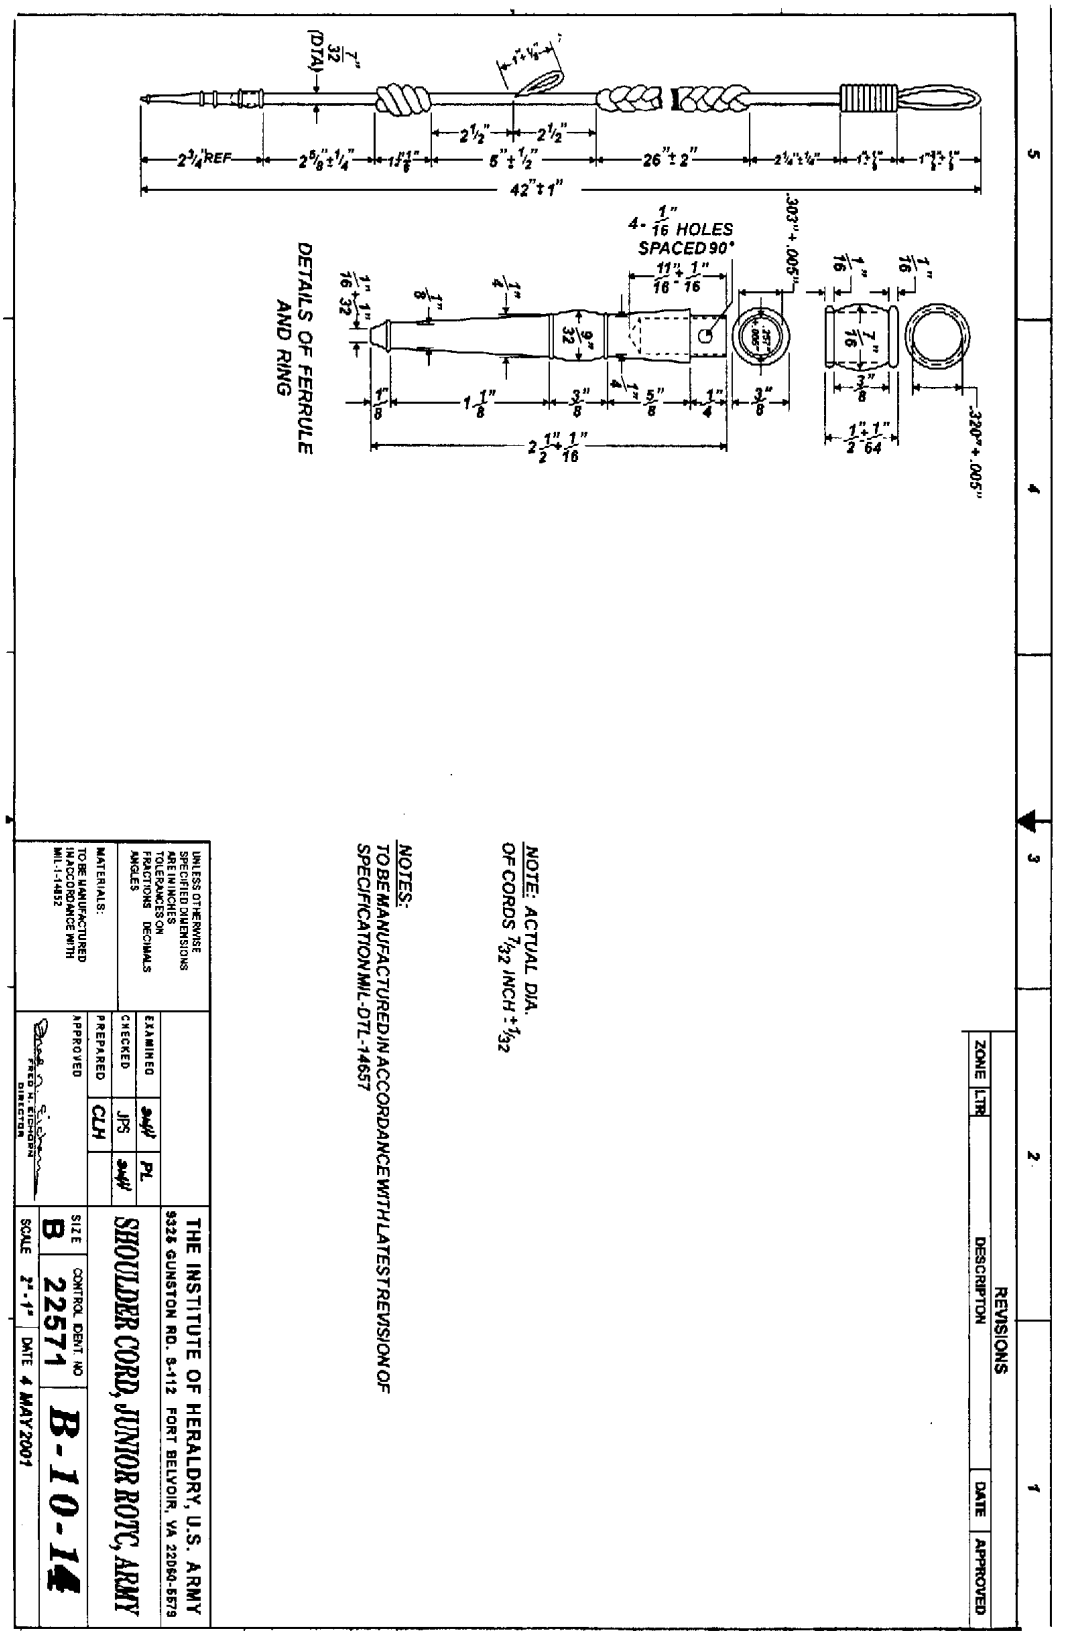



FIGURE 1. **Shoulder Cord, Junior ROTC, Army.**



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| I RECOMMEND A CHANGE: | 1. DOCUMENT NUMBER<br>MIL-DTL-14657 | 2. DOCUMENT DATE (YYYYMMDD)<br>20010504 |
|---|---|---|

3. DOCUMENT TITLE
SHOULDER CORD, JUNIOR ROTC, ARMY

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME *(Last, First, Middle Initial)* | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS *(Include Zip Code)* | d. TELEPHONE (Include Area Code)<br>(1) Commercial<br>(2) AUTOVON<br>*(if applicable)* | 7.DATE SUBMITTED<br>(YYYYMMDD) |

8. PREPARING ACTIVITY

| a. NAME Rose Lynne H. Ulm, Specification Writer, Tech & Produc Div.<br>ulmr@tioh.belvoir.army.mil | b. TELEPHONE *Include Area Code)*<br>(1) Commercial 703-806-4982<br>(2) AUTOVON 656-4982 |
|---|---|
| c. ADDRESS *(Include Zip Code)*<br>The Institute of Heraldry, Dept. of the Army<br>9325 Gunston Road, Bldg. 1466, Rm. S-112<br>Fort Belvoir, VA 22060-5579 | **IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:**<br>Defense Standardization Program Office (DLSC-LM)<br>8725 John J. Kingman road, Suite 2533 Ft. Belvoir, VA 22060-2533<br>Telephone (703) 767-6888 AUTOVON 427-6888 |

DD Form 1426, FEB 1999 (EG) *PREVIOUS EDITION IS OBSOLETE* *WHS/DIOR, Feb 99*



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:35Z
Check the source to verify that this is the current version before use.