MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, (TYPE I), ELECTRONIC TEST EQUIPMENT, (2 POLES, 3 WIRES, GROUNDING, 125 VOLTS, 13 AMPERES, 50/60 HERTZ), GROUNDING PLUG CONNECTOR AND STRAIGHT MOLDED MIL-C-5015 CONNECTOR

Ⓒ

THIS SPECIFICATION INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the cable assembly described herein shall consist of this specification and the latest issue of MIL-C-28777.

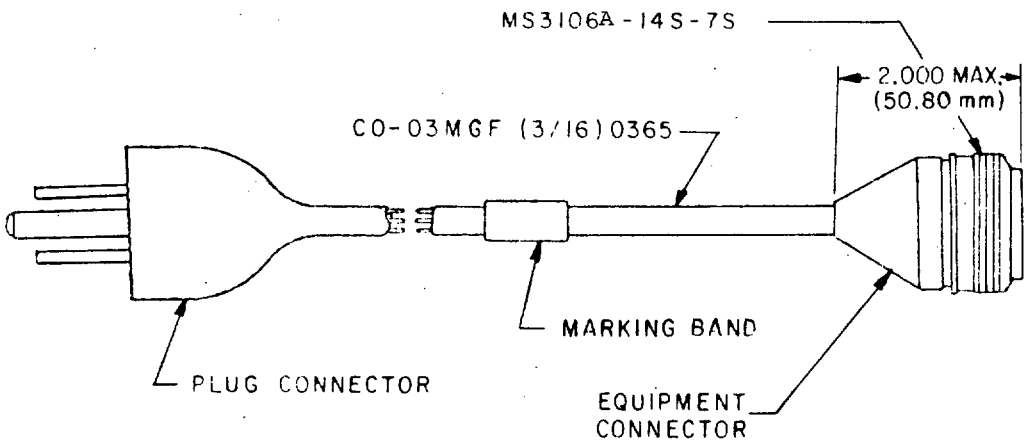

NOTES:
1. The coupling nut on MS3106A-14S-7S connector shall be free turning.
2. Dimensions are in inches.
3. Metric equivalents are given for general information only.

FIGURE 1. Cable assembly.

Ⓒ denotes change

Source: https://assist.dla.mil -- Downloaded: 202640-20T15:13Z
Check the source to verify that this is the current version before use.

FSC 6150

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Plug connector: Shall be molded to the cable jacket using rubber in accordance with type JS(S9R) or MIL-I-3930 or polyurethane in accordance with MIL-M-24041.

Cable-plug connector interface: The green lead (with or without a yellow stripe) shall be connected to the safety ground terminal, the black lead shall be connected to the line terminal, and the white for neutral shall be connected to the remaining terminal of the plug connector.

Type I equipment connector: The MS3106A-14S-7S shall have the safety ground lead (green) connected to pin B, the live lead (black) to pin C, and the neutral lead (white) to pin A.

Part number: M28777/4-1.

Custodians:
Army - CR
Navy - EC
Air Force - 99

Review activities:
Navy - AS, MC
Air Force - 11, 85
DLA - GS, ES

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 6150-0170-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:13Z
Check the source to verify that this is the current version before use.