
MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, (TYPE II), ELECTRONIC TEST EQUIPMENT, (2 POLES, 3 WIRES, GROUNDED, 125 VOLTS, 10 AMPERES, 50 or 60 HERTZ), GROUNDING PLUG CONNECTOR, AND RIGHT HAND ACCESS MOLDED TYPE II EQUIPMENT CONNECTOR

Ⓐ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the cable assembly described herein shall consist of this specification and the latest issue of MIL-C-28777.

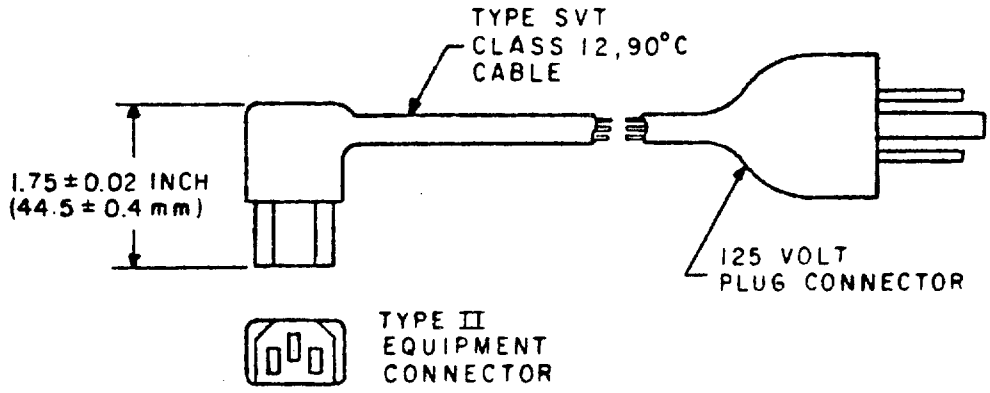

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Cable assembly.

Ⓐ denotes change

FSC 6150

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:13Z
Check for updates to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

REQUIREMENTS:

Dimensions and configuration: See figure 1. The cable shall egress from the right side of the equipment connector as viewed from the connection side with the safety ground terminal uppermost.

Plug connector: Shall be in accordance with the 125 V plug connector requirements of MIL-C-28777.

Cable-plug connector interface: Shall be a three conductor flexible cord. The green lead with a yellow stripe shall be connected to the safety ground terminal, the brown lead shall be connected to the line terminal, and the light blue lead shall be connected to the remaining terminal of the plug connector. Alternate color coding may be used which is black for line, white for neutral, and green (with or without a yellow stripe) for safety ground.

Type II equipment connector: Shall be in accordance with the type II equipment connector requirements of MIL-C-28777.

Part number: M28777/7-1.

Custodians:
Army - CR
Navy - EC
Air Force - 99

Review activities:
Navy - AS, MC
Air Force - 11, 85
DLA - GS, ES

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 6150-0170-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:13Z
Check the source to verify that this is the current version before use.