MIL-C-13473C (AR)

AMENDMENT 2
30 April 1979
SUPERSEDING
AMENDMENT I
19 July 1968

MILITARY SPECIFICATION

CARTRIDGE 106MM, HEAT, M344 A1
LOADING, ASSEMBLING AND PACKING

This Amendment forms a part of Military Specification MIL-C-13473C (MU) dated 5 May 1965.

Page 1

Paragraph 2.1: Specifications - Military add "MIL-I45607 - Inspection Equipment Supply and Maintenance".

Standards - Military: Add "MIL-STD-1168 - Lot Numbering of Ammunition:.

* Drawing - Army: 7549097 - delete "M509A1" and substitute "M509A2".

7548962 - delete "M509 and substitute "M509A1, M509A1E1 or M509A2".

7548963 - delete "Box, Packing...and Packing" and substitute "Box, Packing, Ammunition for Cartridge 106MM: Heat, M344A1, with fuze PIBD, M509A1, M509A1E1 or M509A2 and Practice M344A1 w/inert Projectile w/o fuze for Rifle M40A1 in fiber container M316".

Page 6

* Paragraph 4.2.2.4. Delete 101 in its entirety and substitute:

"101 Fuze screw and lock washer fails to withstand minimum assembly torque (see 3.8)."

Page 8

Paragraph 4.2.2.14 Cartridge Assembly: Delete Major Defects 101 and 102 in their entirety and substitute:

"Major Defect 101 - Liner not cemented in conformance with adhesive zone area...Visual 14017"

"Major Defect 102 - Liner loose or insecure...Visual 14018"

FSC: 1315

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:36Z
Check the source to verify that this is the current version before use.

Page 9

Add Paragraph 4.2.2.18 as follows:

"4.2.2.18 Screw self-locking (See Dwg. 9323855 covering a detail of Dwg. 7549096).

Categories	Defects	Method of Inspection
Critical: None		
Major	AQL 0.65%	
101	Nylon Patch Missing	Visual
102	Length under head over max.	Gage
103	Pitch Diameter, min.	Gage
104	Major Diameter, min.	Gage
Minor	AQL 0.65%	
201	Protective finish incomplete	Visual"

Page 12

Paragraph 4.3.5.1, delete this paragraph in its entirety and substitute the following:

"4.3.5.1 Penetration.-The cartridges tested in paragraph 4.2.3.7.2.1 shall be fired at 6 inch homogeneous armor plate. The cartridges tested in paragraph 4.2.3.7.2.2 shall be fired at 3 to 4 inch homogeneous armor plate except that every tenth lot shall be fired at 6 inch plate. The plate shall be placed at a 60 degree position from the vertical at approximately 400 feet from the muzzle of the rifle. Observation shall be made for penetration by jet action (see 6.5)."

Page 15

Paragraph 6.9 submission of test data and ammunition data cards:

* Delete SMUPA-ND2 and substitute DRDAR-LCU

* Delete SMUPA-DC8 and substitute DRDAR-QAR-E.

* Delete Picatinny Arsenal and substitute:
U.S. Army Armament Research & Development Command.

Add Figures 1 and 2 to MIL-C-13473C (MU) dated 5 May 1965.

The margins of this amendment are marked with an asterisk to indicate

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:36Z
Check the source to verify that this is the current version before use.

where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army-AR

Preparing Activity:
Army-AR

Project Number 1315-A-203

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:36Z
Check the source to verify that this is the current version before use.


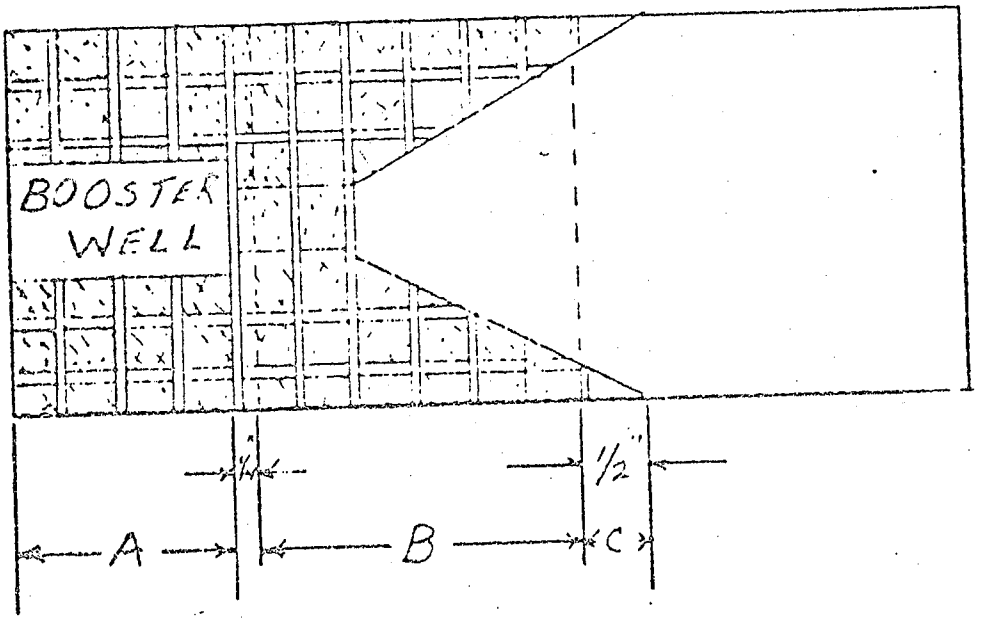


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:36Z
Check the source to verify that this is the current version before use.

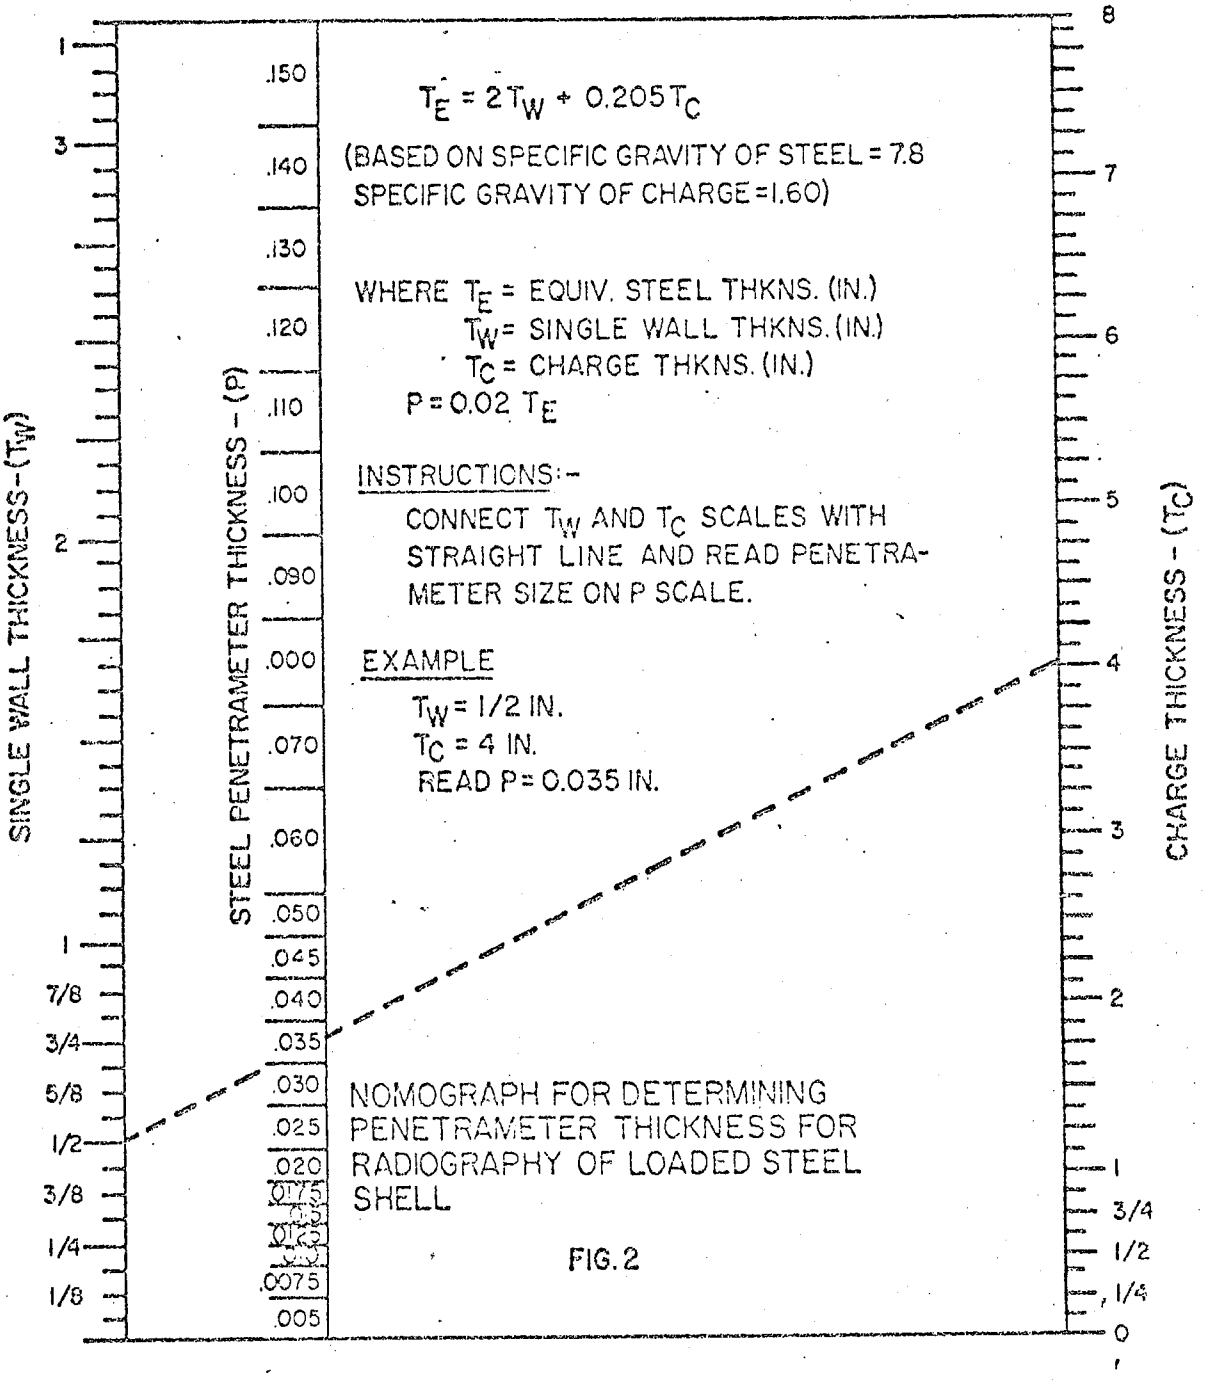

NOMOGRAPH FOR DETERMINING PENETRAMETER THICKNESS FOR RADIOGRAPHY OF LOADED STEEL SHELL

FIG. 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:36Z
Check the source to verify that this is the current version before use.