INCH-POUND

MIL-C-13486/2B
6 June 1989
SUPERSEDING
MIL-C-13486/2A
15 August 1973

MILITARY SPECIFICATION SHEET

CABLE, SPECIAL PURPOSE, ELECTRICAL: LOW-TENSION, HEAVY-DUTY, SINGLE-CONDUCTOR, SHIELDED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-13486

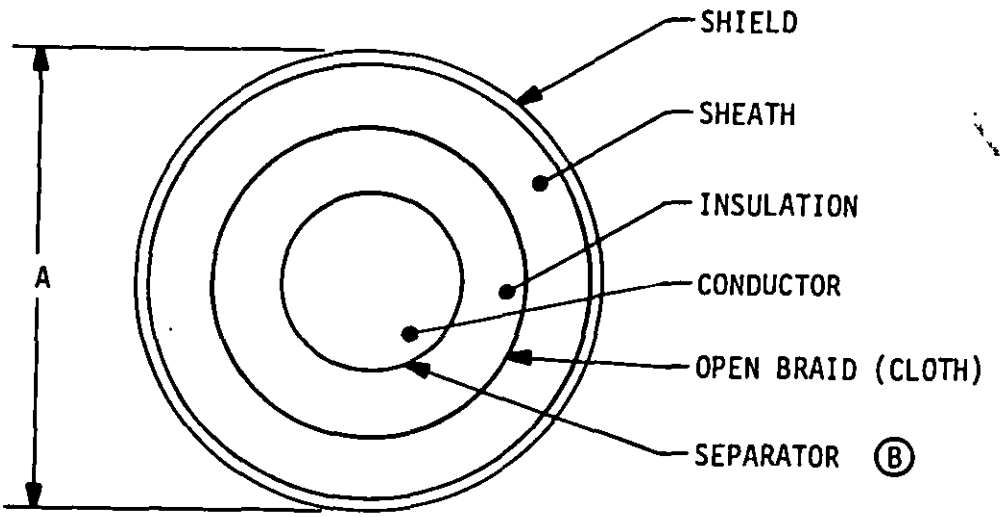

FIGURE 1. Configuration.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I of this specification sheet.
Shielding material: Copper braid.
Braid, strands: 0.0063 inch in diameter, tinned copper.
Braid coverage: 90%.

Part or Identifying Number (PIN): See table I of this specification sheet.
Former part number: See table I of this specification sheet.

TABLE I. Cable data.

PIN	Conductor size 1/	Diameter "A" (inch)	Number of carriers	Former part number
M13486/2-1	14	0.190 ± 0.010	4	8345775
M13486/2-2	16	0.170 ± 0.010	4	8345776

1/ See table I of MIL-C-13486.

Custodians:
Army - AT
Navy - SH
Air Force - 85

Review activities:
Air Force - 99
DLA - IS

User activities:
Air Force - 71, 79, 80, 84

Preparing activity:
Army - AT

(Project 6145-1075-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:38Z
Check the source to verify that this is the current version before use.