MILITARY SPECIFICATION

TELEPHONE SET TA-263( )/PT

1. SCOPE

1.1 This specification covers a Telephone Set TA-263( )/PT, a portable telephone arranged to prevent interference between the telephone and the carrier channels when used by linemen on open wire carrier lines. The equipment consists of a filter assembly attached to Telephone Set TA-43( )/PT ; two whistles, one of 1000 cycles per second (c. p. s.) interrupted at the rate of 20 c. p. s. , the other of 1600 c. p. s. ; and a carrying case. The filter assembly includes a low-pass filter, two resistors, an impedance switch, and four binding posts. The whistles provide voice-frequency signalling over carrier lines from the telephone to the carrier terminals or repeaters.

2. APPLICABLE DOCUMENTS

2.1 The following specifications, standards, and drawings of the issue in effect on date of invitation for bids, form a part of this specification.

SPECIFICATIONS

FEDERAL

NN-B-591	Boxes, Fiberboard, Wood-Cleated (For Domestic Shipment)
NN-B-621	Boxes; Wood, Nailed and Lock-Corner
QQ-S-571	Solder; Soft (Tin, Tin-Lead, and Lead-Silver).
UU-T-111	Tape; Paper, Gummed (Sealing and Securing).
LLL-B-631	Boxes, Fiber, Corrugated (For Domestic Shipment).
PPP-B-601	Boxes; Wood, Cleated-Plywood

MILITARY

JAN-P-106	Packaging and Packing For Overseas Shipment-Boxes, Wood, Nailed.
JAN-P-108	Packaging and Packing for Overseas Shipment-Boxes, Fiberboard (V-Board and W-Board), Exterior and Interior.
MIL-P-116	Preservation, Methods of.
JAN-P-117	Packaging and Packing for Overseas Shipment- Bags, Interior Packaging.
JAN-P-127	Packaging and Packing for Overseas Shipment, Tape, Adhesive, Pressure-Sensitive, Water-Resistant.
MIL-B-131	Barrier-Material; Water Vaporproof, Flexible.

Source: https://assist.dla.mil -- Downloaded: 202640-18T00:35Z
Check the source to verify that this is the currentversion before use.

U. S. ARMY

6-9	Cloth, Sateen, 2-ply, Rubberized
19-10	Filler, Interior Packing, Fiberboard, Corrugated, Single and Double Faced, for General Packing Purposes.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Table for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

DRAWINGS

SIGNAL CORPS

SC-D-15914	Moisture Resistance Test Cycle for Ground Signal Equipment.
SC-D-19999	Standard Extreme-Temperature Cycle.
SC-DL-140011	Whistle Assembly 1000/20 c. p. a.
SC-DL-140024	Whistle Assembly 1600 c. p. a.
SC-DL-140761	Telephone Set TA-263( )/PT.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from or as directed by the contracting officer. Both the title and identifying number or symbol should be stipulated when requesting copies.)

3. REQUIREMENTS

3.1 Construction. -

3.1 Telephone Set TA-263( )/PT. - Telephone Set TA-263( )PT (exclusive of carrying case) shall be constructed in accordance with Drawings SC-DL-140761, SC-DL-140011, and SC-DL-140024.

3.1.2 Carrying case. - Construction of the carrying case shall conform to the procurement model.

3.1.3 Procurement model. - The procurement model shall be understood as the one which, in accordance with the invitation for bids, will be available for inspection by prospective bidders and will be loaned to the contractor for the duration of the contract.

3.2 Soldering. -

3.2.1. Solder. - Solder used for electrical connections shall be composition Sn60 conforming to Specification QQ-S-571.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:35Z
Check the source to verify that this is the current version before use.

3.2.2 Flux and cleaning agents. - No acid or acid salts shall be used in preparation for or during soldering: however, exception is permitted for preliminary tinning of electrical connections and for tinning or soldering of mechanical joints not used to complete electrical circuits, but in no case shall acid or acid salts be used where they can come in contact with insulation material. Where acid or acid salts are used, as permitted above, they shall be completely neutralized and removed immediately after use. Flux for soldering of electrical connections shall be rosin, rosin and alcohol, or rosin and turpentine.

3.2.3 Process. - There shall be no sharp points or rough surfaces resulting from insufficient heating. The solder shall feather out to a thin edge, indicating proper flowing and wetting action, and shall not be crystallized, overheated, or underheated. The minimum necessary amount of flux and solder shall be used for electrical connections. The soldering shall be so accomplished that no rosin remains on the joint or in the proximity of the joint. Any means employed to remove an unavoidable excess of flux shall not incur the risk of loose particles of flux, brush bristles, or other foreign material remaining in the equipment: flux being spread over a larger area; or damage to the equipment. Insulation material that thas been subjected to heating during the soldering operation shall be undamaged and parts fastened thereto shall not have become loosened.

3.3 Cleaning. - Metal parts, after fabrication, shall be cleaned in accordance with good commercial practice, or as specified in an applicable document. Cleaning processes shall have no deleterious effect on the equipment. Corrosive material shall be removed completely before parts are assembled into the equipment. After assembly, components shall be cleaned thoroughly and shall be free from particles of solder, flux, and other foreign material. If necessary, such cleaning shall also be performed before final assembly of components.

3.4 Electrical characteristics. -

3.4.1 Grounding. - Although the filter configuration given in the specification is an unbalanced structure it will be used on balanced circuits, therefore, none of its terminals shall be connected to equipment grounds or earth grounds, during tests or normal operation.

3.4.2 Insertion loss. With the impedance switch on "low" and at or for a corrected ambient temperature of 70° F, the filter shall have the following insertion loss.

Frequency (c.p.s.)	Insertion loss (db)
200	Not less than 5.5
500 to 1600	Not to exceed 1.7
1800	Greater than 10.0
2000	Greater than 28.5
2160 to 6000	Greater than 46.0

Source: https://assist.dla.mil -- Downloaded: 20260-18T00:35Z
Check the source to verify that this is the current version before use.

3.4.3 Impedance. -With the filter terminated in Telephone Set, TA-43( )/PT with the handset off the hook, and with the impedance switch on "low" position, the filter shall have the following impedance.

Frequency (c.p.s.)	Impedance (ohms)
200	Greater than 2900
300	Greater than 1500
1600	Greater than 500
1800	Not greater than 100
3000	Greater than 1100
6000	Greater than 3100

3.5 Whistles. - Two whistles are required for voice frequency signalling. One whistle shall be 1000 ± 100 c.p.s. interrupted at the rate of 20 ± 3 c.p.s. The second whistle shall be 1600 ± 75 c.p.s. uninterrupted. With the test set-up shown in Figure 1 and Figure 2 of this specification, each whistle shall operate its respective ringing equipment when blown by mouth into the transmitter of the local telephone, Telephone Set TA-43/PT.

3.6 Carrying case. -

3.6.1 Cloth, sateen, 2-ply, rubberized. - The rubberized 2-ply sateen shall conform to Specification 6-9.

3.6.2 Color. - The sateen shall be vat-dyed to match the approved shade of Olive Drab No. 7. (See 6.4.)

3.7 Preproduction samples. -

3.7.1 Quantities. - After award of contract two complete Telephone Sets TA-263( )/PT and six filter can assemblies shall be furnished for preproduction inspection and approval. (See 6.3.2).

3.7.2 Compliance with specified requirements. -

3.7.2.1 Preproduction samples shall meet specified requirements, shall be made and assembled by tools and methods that will be used for quantity production and shall be accompanied by a statement to that effect.

3.7.2.2 Approval of preproduction samples shall not be constued as a waiver of any specified requirement. After being released to the contractor (See 3.7.5) preproduction samples to be offered as units on contract shall be refabricated by the contractor if necessary to meet specified requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:35Z
Check the source to verify that this is the current version before use.

PERFORMANCE TEST SET-UP OF WHISTLES

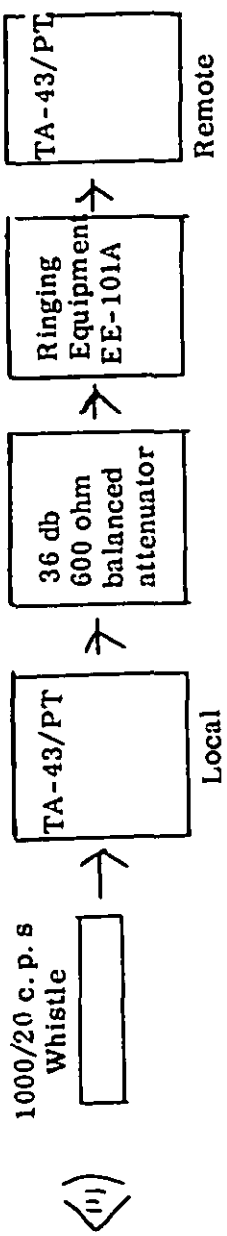


FIGURE 1

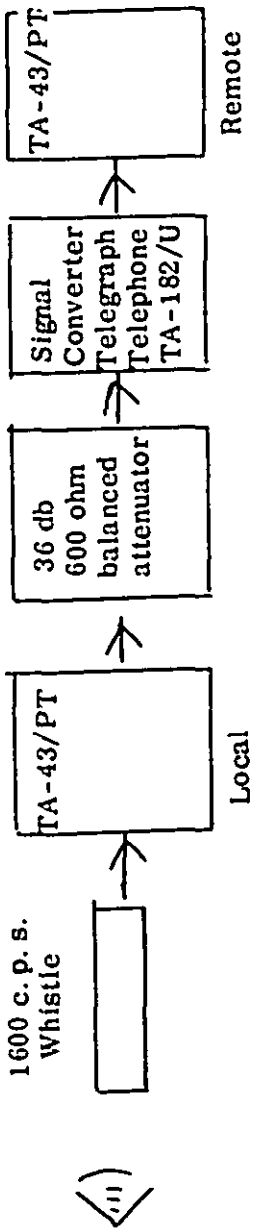


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:35Z
Check the source to verify that this is the current version before use.

3.7.2.3 When deviation from 3.7.2.1 is unavoidable, the preproduction samples may be submitted for approval provided that the accompanying statement describes in detail each nonconforming feature, reason therefor, and manner in which it will be corrected in production of equipment on contract.

3.7.3 Test data. - The preproduction samples shall be accompanied by test data showing compliance with specified performance. The test data shall comprise an engineering report giving test procedure, observations and other data, calculations, test results and essential details of the testing equipment (manufacturer's model serial number, date of calibration, and the like).

3.7.4 Preproduction inspection. - Preproduction samples may be subjected by the Government to the group A inspection specified in Table II and to the preproduction inspection specified in Table I. Unlisted nondestructive inspection on preproduction samples may be performed to determine compliance with specified requirements.. Preproduction inspection will normally be performed in this order: (1) vibration, (2) bounce, (3) shock, drop; other preproduction inspection may precede, follow, or be interspersed between the foregoing.

Table I. - Preproduction inspection

Inspection (For additional preproduction inspection see 3.7.4)	Rqt. Par.	Test Par.
Temperature	3.8	4.6
Moisture Resistance	3.8	4.7
Immersion	3.8.2	4.8
Vibration	3.9.1	4.9
Bounce	3.9.2	4.10
Shock; drop	3.9.3	4.11

3.7.5 Reference standards. - After preproduction samples have been approved and returned to the contractor's plant, they shall be kept intact in custody of the Government inspector until released by him. They shall be used as reference standards to resolve any differences of opinion regarding interpretation of requirements.

3.8 Service conditions. - The equipment shall meet the following service conditions:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:35Z
Check the source to verify that this is the current version before use.

3.8.1 Equipment operating. - The equipment shall meet the requirements of this specification under any probable combination of the following:

(a) Temperature. - Any ambient temperature in the range of -40° F to 131° F.

(b) Relative humidity. - Any relative humidity up to 95 percent.

3.8.2 Equipment nonoperating. - The equipment shall meet the requirements of 3.8.1 after subjection to any one or more of the following nonoperating conditions.

(a) Temperature. -Continuous exposure for 72 hours at 160° F and 72 hours at -80° F, at any orientation.

(b) Relative humidity. - Relative humidity up to 100 percent, including condensation caused by temperature changes.

(c) Immersion. - See. 4.8.

(d) Vibration, bounce, and drop. - See 3.9.

3.9 Vibration, bounce, and shock. -

3.9.1 Vibration. - Except for internal resonance of specified parts and subassemblies, the equipment shall have no mechanical resonance below 55 cycles per second.

3.9.2 Bounce. - The equipment shall meet full specification performance and show no physical damage except surface abrasion when subjected to the test of 4.10.

3.9.3 Shock, drop. - The equipment shall be operable after subjection to the test of 4.11. Minor mechanical damage is permissible.

3.10 Marking. - Marking shall conform to Specification MIL-M-13231.

3.10.1 Serial numbers. - Serial numbers under Specification MIL-M-13231 are not required.

3.11 Technical literature. - Technical literature shall be furnished as specified by the contract.

3.12 Workmanship. - Components, subassemblies, and parts shall be manufactured and assembled in a thoroughly workmanlike manner.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection, general. - Government inspection shall consist of group A inspection as specified in 4.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:35Z
Check the source to verify that this is the current version before use.

4.1.1 Group A inspection. - Group A inspection shall be in accordance with Table II and Standard MIL-STD-105. Group A inspection shall be performed in any order which is satisfactory to the Government inspector.

Table II - Government group A inspection

Inspection	Req. Par.	Test Par.	AQL Major	AQL Minor
Visual and mechanical		4.2	1.5 dphu	6.5 dphu
Insertion loss	3.4.2	4.3	) 1.5 dphu	*
Impedance	3.4.3	4.4	) for the	
Whistles	3.5		) group	

* All electrical defects are oonsidered major.


4.1.2 Disposition of nonconforming product. - When defective sample units or rejected lots are resubmitted for acceptance, such items shall be suitably tagged or identified by equivalent means to indicate the cause of failure and means employed to correct the fault. The record shall be presented to the Government when the items are resubmitted and shall become the property of the Government.

4.2 Visual and mechanical inspection. - Parts and equipment shall be inspected for workmanship, mechanical fit, loose nuts and screws, application of specified tropicalization treatments, and miscellaneous defects. Controls and fastening devices shall be inspected for mechanical operation. Wiring, soldered connections, ground connections, welds, finishes, etc. shall be inspected for workmanship. Clearances, dimensions, and mechanical adjustments shall be measured. Examination also may be made for other visual or mechanical defects, similar to those described above, that are contrary to specified requirements for the equipment. Visual and mechanical defects shall be classified by the Government inspector as major or minor in accordance with the definitions of Standard MIL-STD-105.

4.3 Insertion loss. - The insertion loss of the filter shall be measured by means of an audio oscillator, General Radio Type 713-B, or equal, capable of being adjusted at will within the band up to 6000 c.p.s. to an accuracy of $\pm$ 2 c.p.s. The oscillator shall be arranged to represent an ideal generator of voltage E delivering a balanced output through an internal resistance of 600 ohms $\pm$10 ohms. A General Radio Wave Analyzer 736-A, or equal, arranged as a balanced voltmeter shall be used as a sensitive measuring device terminated by a 600 ohm $\pm$ 10 ohm resistor. The test tone input level to the filter shall be 0 dbm. The insertion loss of the filter shall then be measured as shown in Figure 3. The values of the insertion loss shall meet the requirements of paragraph 3.4.2.

Source: https://assist.dla.mil -- Downloaded: 202640-18T00:35Z
Check the source to verify that this is the currentversion before use.

INSERTION LOSS TEST SET-UP

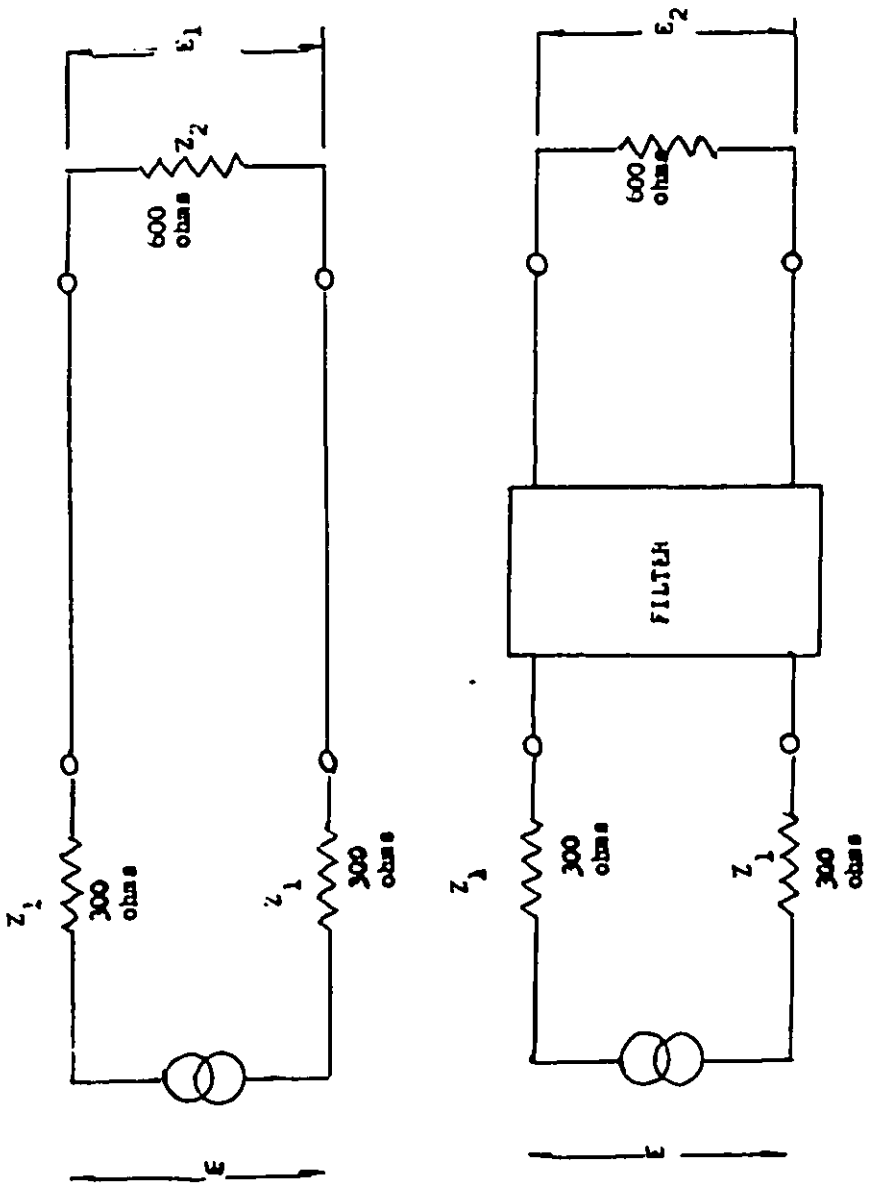

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:35Z
Check the source to verify that this is the current version before use.

4.4 Impedance. - Measurements shall be made by the Starr Bridge Method, or equal, to show compliance with 3.4.3.

4.5 Whistles. - The whistles shall be tested for compliance with 3.5 using the test set up shown in Figure 1 and Figure 2. The frequency requirements of the whistles should be checked with a suitable frequency measuring device, using the same set up if desired.

4.6 Temperature. - The equipment shall be subjected to the temperature cycle shown on Drawing SC-D-19999. The tests of 4.2 through 4.5 shall be made at step 4 and step 8.

4.7 Moisture-resistance test for equipment. -

4.7.1 Test conditions:

(a) Do not move components from the Humidity chamber for measurements.

(b) Start measurements not more than 5 minutes after power is applied to the components. Complete measurements as rapidly as possible. Do not leave power on after measurements have been completed.

4.7.2 Test Procedure. - The components will be tested as follows:

(a) Dry at 130° ± 5° F, for 24 hours.

(b) Condition at 77° ± 5° F. and 40 to 50 percent relative humidity for 24 hours.

(c) Take measurements as specified in 4.7.3.

(d) Subject to continuous cycling for 5 48 hour cycles. Temperature, relative humidity, and period of time for each portion of the cycle shall conform to Drawing SC-D-15914. The measurements specified in 4.7.3 shall be made during the periods shown on the drawing and shall comply with 4.7.3.

(e) After cycling has been completed, condition the components for 24 hours at 77 ± 5° F. and 40 to 60 percent relative humidity. The components shall meet full specification requirements for those measurements specified in 4.7.3.

4.7.3 Performance. - Measurements made during test and specified performance during cycling shall be as specified in 4.3 through 4.5.

4.7.4 Failure. - If the equipment fails to meet the performance specified in 4.7.3, it should be rejected.

4.8 Immersion. - The equipment, removed from cloth carrying case, shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:35Z
Check the source to verify that this is the current version before use.

be immersed to a minimum depth of 3 feet of fresh water for 2 hours. Immediately prior to immersion, the temperature of the equipment shall be 40° F, or more, above the temperature of the water. The tank in which the equipment is immersed shall be of sufficient capacity to maintain the water within ± 2° F of its initial temperature, or the temperature of the water shall be maintained within those limits by other means. There shall be no evidence of leakage.

4.9 Vibration test. - The equipment shall be tested for resonant frequencies below 55 cycles per second, to determine compliance with 3.9.1, as follows:

(a) The equipment shall be fastened in its normal mounting position on a vibration table that can be controlled within 10 percent of the specified amplitude. The vibration table shall provide approximately sinusoidal vibration.

(b) The equipment shall be vibrated successively in three mutual perpendicular directions that are parallel respectively to the edges of the equipment over a frequency range of 10 to 55 cycles per second in 1 cycle per second steps. The total excursion shall be constant at 1/64 inch.

(c) Resonances of components, structure, and sub-assemblies may be determined visually, by means of a Strobotac, as made by the General Radio Corporation, Cambridge, Massachusetts, or equal, or by energizing the equipment and detecting mechanical vibration through electrical output indications.

(d) If because of compactness or inaccessibility it is not possible to determine the resonances completely by the above means, the equipment shall be broken down into logical sub-assemblies for this test. These sub-assemblies shall be secured to the vibration table in the same fashion that they are secured in the actual equipment.

4.10 Bounce test; equipment under 1000 pounds. - The equipment, in its transit case shall be placed on the table of the Package Tester as made by the L. A. B. Corporation, Summit, New Jersey, or equal, and shall be constrained from horizontal motion of more than 2 inches by suitable wooden fences. The package tester, shafts in phase, shall be operated at a speed of 285 r. p. m. ± 1 percent, for a total of 3 hours. During each ½ hour period of the test, the transit case (with contained equipment) shall rest on a different face. The equipment shall meet the requirements of 3.9.2.

4.11 Shock test; drop. -

(1) The telephone set, as packaged for shipment, shall be dropped 4 times from a vertical height of 6 feet on a concrete floor. The telephone set shall strike at least once on the edge of the case.

(2) The telephone set, in operating condition, shall be dropped 4 times from a vertical height of 2½ feet on a concrete floor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:35Z
Check the source to verify that this is the current version before use.

The telephone set shall strike at least once on each exposed side of the set.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. -

5.1.1 Domestic, immediate use. -Telephone Set TA-263( )/PT shall be preserved and packaged to afford protection against deterioration and damage during shipment.

5.1.2 Domestic, limited storage. - Telephone Set TA 263( )/PT shall be packaged in accordance with Specification MIL-P-116 as follows:

5.1.2.1 Technical manual. - Package each technical manual Method IC-3, as follows: Inclose each technical manual within a close-fitting Class b bag, conforming to Specification JAN-P-117. Properly seal closure.

5.1.2.2 Carrying case. - Fold each carrying case into proportionate dimensions and tie with cotton tape.

5.1.2.3 Telephone Set TA-263( )/PT. - Package each telephone set Method IC-5 as follows: Each telephone set shall be adequately cushioned on all surfaces with cells or pads or both fabricated of corrugated fiberboard conforming to Specification 19-10 (A or C flute acceptable) and designed to absorb the shock of impact normally encountered in handling and transit. Place the cushioned telephone set together with the carrying case and the technical manual, packaged as specified in 5.1.2.1 and 5.1.2.2 within a close-fitting, suitable style and grade corrugated fiberboard box conforming to Specification JAN-P-108. Seal entire box closure, corners and joints with water-resistant, pressure-sensitive tape conforming to Specification JAN-P-127.

5.1.3 Military overseas. - Preserve and package Telephone Set TA-263 ( )/PT in accordance with procedures specified for designated methods as prescribed in Specification MIL-P-116 and further described in the following paragraphs.

5.1.3.1 Technical manual. - Package each technical manual as specified in 5.1.2.1.

5.1.3.2 Carrying case. - Package each carrying case as specified in 5.1.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:35Z
Check the source to verify that this is the current version before use.

5.1.3.3 Telephone set TA-263( )/PT. - Package each telephone set Method IIb as follows: Each telephone set shall be adequately cushioned on all surfaces with cells or pads or both fabricated of corrugated fiberboard conforming to Specification 19-10 (A or C flute acceptable) and designed to absorb the shock of impact normally encountered in handling and transit. Place the cushioned telephone set together with the required amount of desiccant as prescribed in Specification MIL-P-116 within a close-fitting suitable style corrugated fiberboard box. Seal entire closure with gummed paper tape conforming to Specification UU-T-111. Blunt all corners of the box. Place the boxed telephone set within a water-vapor-proof barrier qualified for Class 1 application in accordance with the requirements of Specification MIL-B-131. Heat seal closure. Place the carrying case packaged as specified in 5.1.3.2, technical manual packaged as specified in 5.1.3.1, and the water-vapor-proofed telephone set together within a close-fitting, suitable style and grade fiberboard box conforming to Specification JAN-P-108. Seal entire box closure, corners and joints with water-resistant, pressure-sensitive tape conforming to Specification JAN-P-127.

5.2 Packing. -

5.2.1 Domestic, immediate use. - Telephone Set TA-263( )/PT shall be so packed as to insure arrival at destination in satisfactory condition and in containers complying with Consolidated Freight Classification Rules at lowest rates.

5.2.2 Domestic, limited storage. - Telephone Set TA-263( )/PT packaged as specified in 5.1.2 shall be packed in wood cleated fiberboard, wood cleated plywood, nailed wood, or corrugated fiberboard boxes conforming to Specification NN-B-591, PPP-B-601, NN-B-621 or LLL-B-631. The gross weight shall not exceed 65 pounds for fiberboard boxes and 200 pounds for plywood or wood boxes. Closure shall be made in accordance with applicable box specification.

5.2.3 Military overseas. - A quantity of Telephone Set TA-263( )/PT packaged as specified in 5.1.3 shall be packed in wood cleated plywood or nailed wood boxes conforming to the requirements of Specification PPP-B-601 or JAN-P-106. The approximate gross weight of any exterior shipping container shall not exceed 150 pounds. Close the shipping container as specified in the appendix of the applicable box specification.

5.2.3.1 Shipping containers shall be strapped in conformance with the requirements of the appendix of the applicable container specification only for direct shipments to ports.

5.3 Marking for shipment. - Interior packages and exterior shipping containers shall be marked in accordance with applicable provisions of Standard MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202640-18T00:35Z
Check the source to verify that this is the currentversion before use.

6. NOTES

6.1 Intended use. -Telephone Set TA-263( )/PT is intended for use as a lineman' s test set on open wire carrier systems.

6.2 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Whether domestic or overseas shipment is required.

(c) Technical literature required.

6.3 Contractual requirements. - It is recommended that the following be included in the contract:

6.3.1 Additional testing. - It should be understood that additional inspection and non-destructive testing of equipment may be performed by the Government inspector when considered necessary to determine compliance with this specification and other applicable documents. The Government inspector, therefore, may withdraw materials, parts, subassemblies or components temporarily from production for such inspection and testing, performed either at a Government laboratory or the contractor's plant.

6.3.2 Waiver of preproduction samples. - When items for which preproduction samples are required are currently in production on a Government order, the contractor may apply to the contracting officer for waiver of preproduction samples on the new order. Any request for waiver should be made by the prime contractor and should include a statement indicating that: The specified samples have been submitted and approved on the current contract; production of the item under the new order will be concurrent with, or follow without interruption, production on the current order and will be at the same plant; and current production is in strict compliance with specified requirements for the new equipment except for such deviations as may be authorized on the current order. These deviations should be described in the statement. Waiver of preproduction samples may be contingent on renegotiation of the contract to reflect the saving in cost to the contractor.

6.4 Color of textiles. - Standard samples of Olive Drab No. 7 may be obtained from Specifications and Quality Control Branch, Philadelphia Quatermaster Depot, 2800 South Twentieth Street, Philadelphia 45, Pennsylvania. When requesting samples, indication should be given as to type of material concerned.

6.5 Nomenclature. -The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: TA-263W/PT. As soon as possible after the award of contract, the contractor should apply to the Government office specified in the contract for such information. (See 1.1.)

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:35Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:35Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-18T00:35Z
Check the source to verify that this is the current version before use.