[INCH-POUND]
A-A-59306/2A
December 19, 2007
SUPERSEDING
A-A-59306/2
July 17, 2003


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

# FUSE CARTRIDGE, CLASS T, 600 VOLTS AC, FAST ACTING

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

The complete requirements for procuring the fuse cartridges described herein shall consist of this document and the issue in effect of CID A-A-59306.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

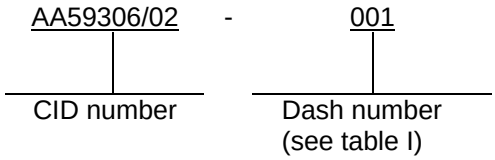


SALIENT CHARACTERISTICS.

Interface and physical dimensions. Fuse cartridges supplied to this CID specification sheet shall be as specified herein (see figure 1).


Ampere rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 600 V ac, 300 V dc.


Interrupting rating. The interrupting rating shall be 200,000 amperes root mean square (RMS) symmetrical for ac operation and 20,000 amperes for dc operation.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

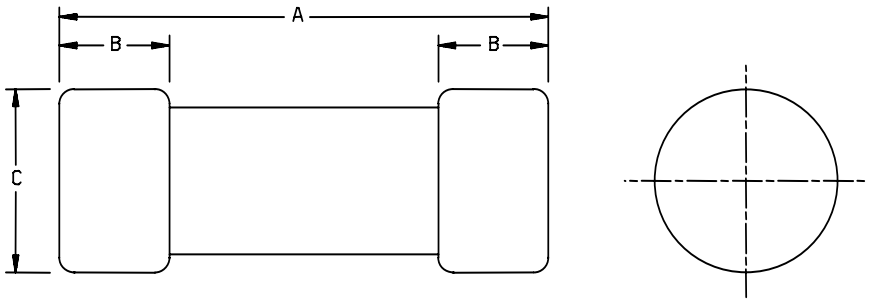


| AA59306/02 | Dimensions | | |
|---|---|---|---|
| | A | B | C |
| 001 through 009 | 1.500 (38.10) | .280 (7.11) | .563 (10.30) |

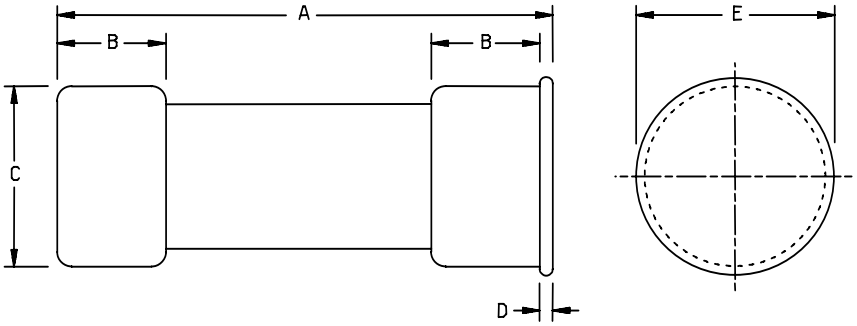


| AA59306/02 | Dimensions | | | | |
|---|---|---|---|---|---|
| | A | B | C | D | E |
| 010 through 014 | 1.560 (39.62) | .410 (10.41) | .812 (20.62) | .062 (1.57) | .994 (25.25) |


NOTES:

1. Dimensions are in inches.
2. Tolerance is ±.005 inch (0.13 mm), unless otherwise specified.

FIGURE 1. Configuration and dimensions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

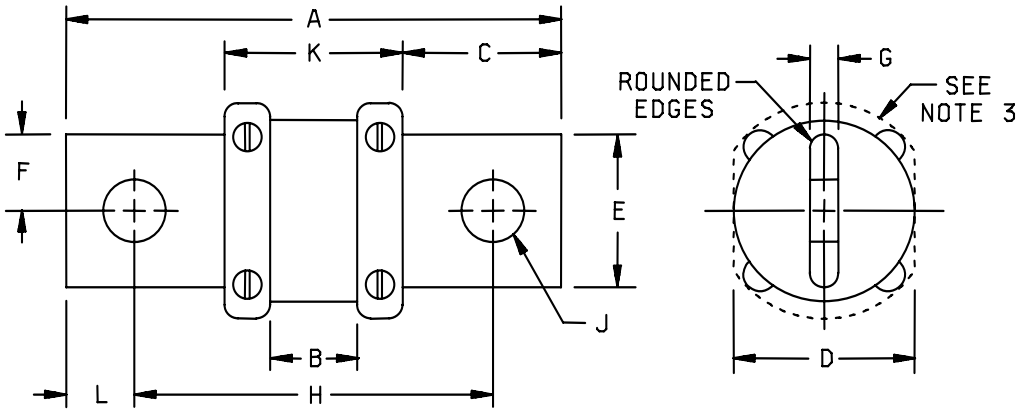


| AA59306/02- | Dimensions | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | A | B | C | D | E | F | G | H | J | K | L |
| 015 through 018 | 2.953 (75.01) | 0.5 (12.7) | 0.646 (16.41) | 0.250 (21.03) | 0.750 (19.05) | 0.375 (9.525) | 0.125 (3.18) | 2.352 (59.74) | 0.281 (7.14) | 1.640 (41.66) | 0.300 (7.62) |
| 019 through 023 | 3.250 (82.55) | 0.5 (12.7) | 0.787 (19.99) | 1.078 (27.38) | 0.875 (22.22) | 0.437 (11.11) | 0.188 (4.78) | 2.507 (63.67) | 0.344 (8.74) | 1.660 (42.16) | (0.372) (9.45) |
| 024 through 028 | 3.625 (92.08) | 0.5 (12.7) | 0.926 (23.52) | 1.625 (41.28) | 1.000 (25.40) | 0.500 (12.70) | 0.250 (6.35) | 2.719 (69.06) | 0.406 (10.31) | 1.730 (43.94) | 0.453 (11.51) |
| 029 through 031 | 3.984 (101.19) | 0.5 (12.7) | 1.074 (27.28) | 2.094 (53.19) | 1.250 (31.75) | 0.625 (15.88) | 0.312 (7.92) | 2.953 (75.01) | 0.484 (12.29) | 1.780 (45.21) | 0.516 (13.11) |
| 032 through 033 | 4.328 (109.93) | 0.5 (12.7) | 1.207 (30.66) | 2.516 (63.91) | 1.750 (44.45) | 0.875 (22.23) | 0.375 (9.53) | 3.172 (80.57) | 0.547 (13.89) | 1.875 (47.63) | 0.578 (14.68) |
| 034 through 035 | 5.270 (133.90) | 2.300 (58.40) | 1.441 (36.60) | 2.630 (66.80) | 2.000 (50.8) | 1.000 (25.4) | 0.440 (11.2) | 3.800 (96.50) | 0.609 (15.48) | 2.300 (58.40) | 0.735 (18.67) |

NOTES:

1. Dimensions are in inches.
2. Tolerance is ±.005 inch (0.13 mm), unless otherwise specified.
3. The dashed line represents the limit of the maximum 1.58 mm (0.063 in.) projection of the screw, rivet head, or the like.

FIGURE 2. Configuration and dimensions



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

| CID dash number AA59306/02- | Ampere Rating | CID dash number AA59306/02- | Ampere rating |
|---|---|---|---|
| 001 | 1 | 019 | 110 |
| 002 | 2 | 020 | 125 |
| 003 | 3 | 021 | 150 |
| 004 | 6 | 022 | 175 |
| 005 | 10 | 023 | 200 |
| 006 | 15 | 024 | 225 |
| 007 | 20 | 025 | 250 |
| 008 | 25 | 026 | 300 |
| 009 | 30 | 027 | 350 |
| 010 | 35 | 028 | 400 |
| 011 | 40 | 029 | 450 |
| 012 | 45 | 030 | 500 |
| 013 | 50 | 031 | 600 |
| 014 | 60 | 032 | 700 |
| 015 | 70 | 033 | 800 |
| 016 | 80 | 034 | 1000 |
| 017 | 90 | 035 | 1100 |
| 018 | 100 | 036 | 1200 |

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Other publications.

Non Government Publications

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 248-15 - Low-Voltage Fuses - Part 15: Class T Fuses.

(Copies of this document are available online at http://www.ul.com/ or from the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

| MFR's CAGE | MFR's name and address |
|---|---|
| 71400 | Cooper Bussmann, Incorporated<br>P. O. Box 14460<br>St. Louis, MO 63178-4460<br>Phone number (636) 394-2877<br>Facsimile number (800) 544-2570<br>E-mail: mailto:fusebox@buss.com<br>Uniform Resource Locator (URL): http://www.bussmann.com |

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. P/N supersession data.

| CID dash number AA59306/02- (see table I) | MFR'S CAGE 71400<br>MFR's P/N 1/ | CID dash number AA59306/02- (see table I) | MFR'S CAGE 71400<br>MFR's P/N 1/ |
|---|---|---|---|
| 001 | JJS-1 | 019 | JJS-110 |
| 002 | JJS-2 | 020 | JJS-125 |
| 003 | JJS-3 | 021 | JJS-150 |
| 004 | JJS-6 | 022 | JJS-175 |
| 005 | JJS-10 | 023 | JJS-200 |
| 006 | JJS-15 | 024 | JJS-225 |
| 007 | JJS-20 | 025 | JJS-250 |
| 008 | JJS-25 | 026 | JJS-300 |
| 009 | JJS-30 | 027 | JJS-350 |
| 010 | JJS-35 | 028 | JJS-400 |
| 011 | JJS-40 | 029 | JJS-450 |
| 012 | JJS-45 | 030 | JJS-500 |
| 013 | JJS-50 | 031 | JJS-600 |
| 014 | JJS-60 | 032 | N/A |
| 015 | JJS-70 | 033 | JJS-800 |
| 016 | JJS-80 | 034 | N/A |
| 017 | JJS-90 | 035 | N/A |
| 018 | JJS-100 | 036 | N/A |

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph of A-A-59306.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5920-2008-006

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.