[INCH−POUND]
A−A−59310
25 August 1998

COMMERCIAL ITEM DESCRIPTION

FILTER, FLUID

The General Services Administration has authorized the use of this commercial item description (CID), for all federal agencies.

1. SCOPE. This CID covers the requirements for a filter assembly, for use in the fuel systems of internal combustion engines, modified for use as an air filter for air−powered, bleed air, control valves (see 6.1).

2. SALIENT CHARACTERISTICS.

2.1 Materials. Unless otherwise specified herein, the materials used shall be in accordance with the manufacturer's materials specifications for fluid fuel filters as required to meet the performance requirements of this CID. All surfaces shall be cleaned, primed, treated and finished in accordance with the manufacturer's standard commercial practices to resist corrosion.

2.2 Design and construction. The design and construction of the filter shall be in accordance with figure 1. The manufacturer's filter may be modified to conform to figure 1 by removing a length of the tube from the inlet and outlet of the filter, but retaining the tube bead. The filter weight shall be not greater than 8 ounces.

2.3 Performance. The filter shall meet the performance characteristics specified in table I using a liquid flow rate of not less than 35 gallons per hour.

2.4 Identification and marking. The filter shall be marked with the direction of flow and the manufacturer's brand name and model number.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: Technical Director, U.S. Army Edgewood Research, Development and Engineering Center, ATTN: SCBRD−ENE−S, Aberdeen Proving Ground, MD 21010−5423.

AMSC N/A FSC 2910

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

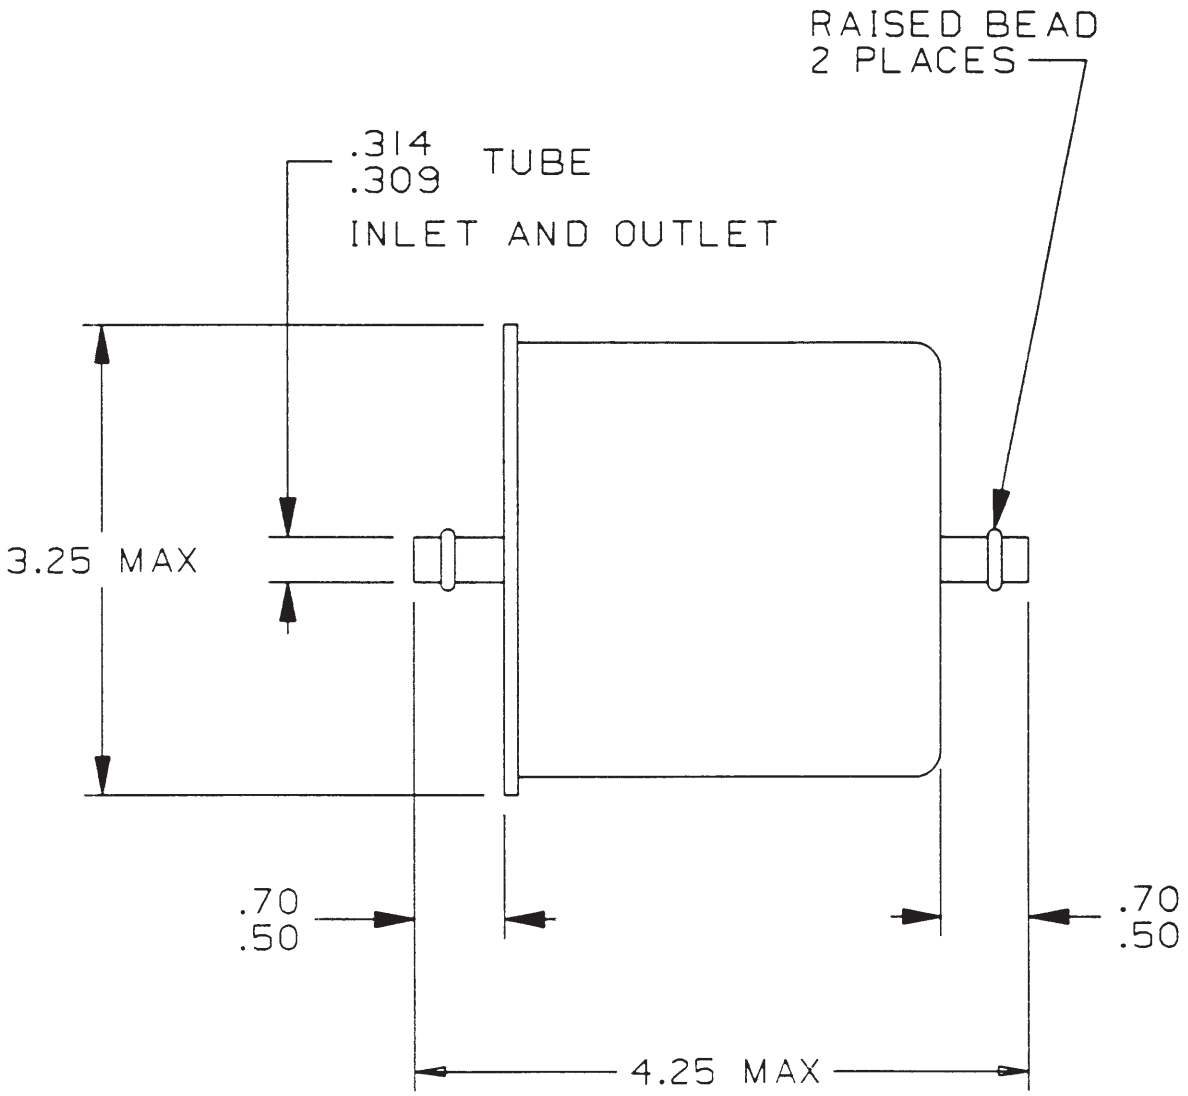


Figure 1. Filter dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

TABLE I. Filter performance characteristics.

Characteristic	Requirement	Test Method
Restriction	2.5 inches of mercury, maximum	SAE J905, Chapter 1
Filter capacity	2.5 grams, minimum	SAE J905, Chapter 2
Media migration	1.0 milligrams total contaminant, maximum	SAE J905, Chapter 3
Single path efficiency At 1 minute At 5 minutes At 10 minutes	 88 percent, minimum 88 percent, minimum 99 percent, minimum	SAE J905, Chapter 2
External leakage	1 milliliter/minute, minimum at 20 psi or no visible leaks at 75 psi	SAE J905, Chapter 7.1
Vibration resistance	No fatigue or leakage	SAE J905, Chapter 7.3, while pressurized at 75 psi, 0.060 inch amplitude, vary frequency 6.7−66.6−6.7 Hertz in 30 seconds, for 300 hours (100 hours in each plane)
Pressure impulse	No leaks	SAE J905, Chapter 7.2, 0−100−0 psi at 3 Hertz for 300K cycles, minimum
Media collapse	No collapse at 150 psi, minimum	SAE J905, Chapter 4
Corrosion	No internal or external corrosion.	ASTM B 117, exposure to salt spray for 100 hours. After exposure, cut filter open to assess internal corrosion.

3. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5. PACKAGING. Preservation, packing, labeling, and marking shall be as specified in the contract or order.

6. NOTES.

6.1 Intended use. The filter covered by this CID (NSN 2910−01−437−6885) is a component of the M56 and M58 Smoke Generators. It is used to supply filtered air to the air−operated valve that controls the release of bleed air from the gas turbine engine.

6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number, and date of this CID.
(b) Issue of the industry standard to be cited in the solicitation, and if required, the specific issue of individual documents referenced.
(c) Packaging requirements.

6.3 Sources of documents.

6.3.1 Federal Acquisition Regulation. The FAR is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402−0002.

6.3.2 SAE standards. SAE standards are available from the Society of Automotive Engineers Inc., 400 Commonwealth Drive, Warrendale, PA 15096−0001

6.3.3 ASTM standards. ASTM standards are available from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428−2959.

6.4 Product known to meet CID. When modified as specified in 2.2, the FRAM G3802A gasoline filter, manufactured by AlliedSignal Automotive, Aftermarket Division, has met the requirements of this CID.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:

Army − EA
Air Force − 99

Review activity:

Army − AT

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA − FSS (FCAE)

Preparing activity:

Army − EA

(Project 2910−0242)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.