KK[illegible]-476b
February 13, 1963

SUPERSEDING
Int. Fed. Spec. KK-G-00476a (GSA-FSS)
February 19, 1958

FEDERAL SPECIFICATION

GLOVES, LEATHER, (GAUNTLET, LINEMEN'S)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers leather gauntlet work gloves where contact with live wires is not involved (see 6.1).

1.2 Classification.

1.2.1 *Type and sizes.* The gloves covered by this specification shall be of one type and furnished in the following sizes as specified (see 6.2):

Small
Medium
Large
Extra large

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

Federal Specifications:

FF-C-436—Clip, Paper.

KK-L-311—Leather; Methods of Sampling and Testing.

UU-P-268—Paper, Kraft, Untreated, Wrapping.

CCC-C-419—Cloth, Cotton, Duck, Unbleached, Plied Yarns, (Army and Numbered).

CCC-T-191—Textile Test Methods.

DDD-L-20—Label; For Clothing, Equipage, and Tentage, (General Use).

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

Fed. Std. No. 751—Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specifications:

MIL-B-17757—Boxes, Fiber, Corrugated (Modular Sizes).

MIL-T-40040—Thread, Polyester.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Guide samples. Samples, when furnished are solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 Material.

3.2.1 *Leather.* The leather used shall be as specified in 3.8.1 and 3.8.2. The leather shall be chrome tanned. When grain horsehide is used, it shall be full-grain horsehide fronts, i.e., sides with the butts trimmed off, the front shanks cut off, and shall be free from grub holes and deep wrinkles. When split horsehide is used it shall be flesh. When split cowhide is used, it shall be made from flesh split cowhide. Middle splits, head and shoulder, or belly splits shall not be used. Palms, thumbs, fingers, and backs shall be made from the best selected cuts.

3.2.1.1 *Thickness.* The thickness of leather glove parts shall be not less than 2-1/2 ounces nor more than 3-1/2 ounces. (Note: An ounce is equivalent in thickness to 1/64 inch.)

3.2.1.2 *Color.* The color of all leather components shall be cream or light gray. All leather components used in each pair of gloves shall be of the same color.

3.2.1.3 *Physical requirements.*

3.2.1.3.1 *Stitch tearing strength.* Not less than 80 percent of the specimens tested shall have a stitch tearing strength of not less than 25 pounds when tested as specified in 4.2.1.1. This requirement shall not apply to the leather welting or reinforcements.

3.2.1.3.2 *Flexibility after soaking.* The leather shall not be permanently affected nor increase its flex stiffness by more than 25.0 percent when tested as specified in 4.2.1.1.

3.2.1.3.3 *Chemical requirements.* The leather shall be fully chrome tanned and shall conform to the requirements of table I when tested as specified in 4.2.1.1.

TABLE I.—*Chemical requirements of leather*

	Minimum	Maximum
Chromic oxide, percent[1]	3.5[2]	-
Chloroform extract, percent[1] .	10.0	20.0
Ash, percent[1]	-	8.0
Acidity (pH)	3.5	5.0
Shrinkage temperature	96°C.	-

[1] Calculated on a moisture-free basis.
[2] A minus 0.5 percent tolerance is permitted.

3.2.2 *Thread.* The thread used for stitching and seaming the gloves shall be thread, polyester, size E, conforming to classes 1 or 2 of MIL-T-40040.

3.2.3 *Gauntlet cuff facing.* At the option of the manufacturer, the gauntlet cuff facing shall be cotton duck conforming to the requirements for type I, number 8, hard texture numbered duck described in CCC-C-419, or gauntlet lining fabric composed of two thicknesses of cotton fabric securely laminated together. The laminated fabric shall be composed of a cotton twill face fabric weighing not less than 5 ounces per square yard and plain weave cotton backing fabric weighing not less than 2.5 ounces per square yard. The finished fabric (laminated) shall contain not less than 14 ounces of natural rubber, synthetic rubber or synthetic resin and weigh not less than 21.5 ounces per square yard.

3.2.4 *Label.* Each glove shall have a combination size and identification label con-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE II.—*Stitches and seams in linemen's gloves*

Operation	Rows of stitching	Gage	Seam and stitching types
		Inch	
Uniting welt, palm, and fourchette .	Double	1/16 to 3/32	LSa-2
Joining palm and thumb	Single	----------	SSa-1
Joining fingers	Single	----------	SSa-1
Sewing back seam	Double	1/16 to 3/32	LSa-2
Making gauntlet	Double	1/8 to 3/16	LSa-2
Hemming gauntlet	Single	----------	EFa-1
Joining gauntlet to glove section ..	Double	1/8 to 3/16	LSa-2
Turning flap over gauntlet	Double	1/8 to 3/16	SSa-2
Closing seam[1]	Single	----------	SSa-1

[1] A second row of stitching 1/16 inch back of the first row shall be stitched on the glove section and at hem at gauntlet.

forming to type III or IV, class 4 of DDD-L-20. The label shall show fastness to accelerated laundering when tested as specified in DDD-L-20.

3.3 Stitches, seams and stitching. All stitching and seaming shall be done with stitch type 301 and seam types as specified in table II in conformance with the requirement of Fed. Std. No. 751, using not less than 7 nor more than 10 stitches per inch. All ends of stitching shall be back-stitched not less than 1/2 inch. All thread ends shall be trimmed.

3.4 Dies and patterns. The dies and patterns for cutting all parts of the gloves shall be furnished by the contractor and shall be of the proper proportions to provide good fitting gloves conforming to finished measurements in table III.

3.5 Figures. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall govern.

3.6 Dimensions of gloves. The finished gloves shall conform to the dimensions shown in table III. Measurements shall be taken as shown in figure 1.

3.7 Dimensions of reinforcements. The flap reinforcing front seam joining palm and bottom of gauntlet shall be approximately 2 inches wide. The thumb welt shall be approximately 1/2 inch wide, the welt for base of fingers approximately 5/8 inch wide, and the welt for the "Davey" tips shall be cut approximately 5/8 inch wide.

3.8 Detail requirements—leather.

3.8.1 *Hand section.* The back of the glove shall be split cowhide leather. The palm, thumb, fingers, and reinforcing pieces shall be full-grain horsehide or cowhide leather as specified. All grain leather components shall be made of the same kind of leather.

3.8.2 *Gauntlet.* The gauntlet shall be of split cowhide leather.

3.9 Design. The design of the glove shall be a two-piece, half outseamed, slip-on style, gunn cut glove, with a hemmed gauntlet. The continuous thumb shall be inseamed around all edges with a welt of the leather inserted in the seam. The seam at the base

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE III.—*Finished dimensions of gloves*

Measurement	Sizes				Tolerance plus or minus
	Small	Medium	Large	Extra Large	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*
A - Top edge of cuff to tip of second finger	12-3/4	13	13-1/2	14	1/2
B - Bottom edge of cuff to tip of second finger	7-3/4	8	8-1/2	8-3/4	1/4
C - Across palm at thumb, crotch, seam to seam	4-1/2	5	5-1/2	5-3/4	1/8
D - Tip of index finger to thumb crotch	4-3/4	5	5-1/2	5-3/4	1/8
E - Thumb crotch to tip of thumb	2-3/4	3	3-1/4	3-1/2	1/8
F - Across bottom edge of cuff	4-3/4	5	5-1/2	6	1/4
G - Across top edge of cuff	6-1/4	6-3/4	7	7-1/2	1/4

and tips of the fingers, shall include a leather reinforcing welt turned up to protect the stitching. A palm reinforcing flap is attached to the top of the glove and bottom of the gauntlet, on the palm side, as shown in figure 1.

3.10 Color. The color of the leather gloves shall be cream or light pearl gray.

3.11 Marking. The label specified in 3.2.4 shall be applied to the inside of the back of each glove at center, approximately 1/2 inch down from the finished top edge.

3.12 Pairing. The gloves shall be matched, paired, and tacked together with thread. Tacking shall be done with not less than two stitches using a cord thread which will permit the pair to be pulled apart without tearing the leather.

3.13 Construction

3.13.1 *General.*

3.13.1.1 *Glove section.* The thumb shall be of "inseam" construction, the fingers of "outseam" construction; the thumb shall be furnished with an "all-around-turn-back" welt, and the ends of the fingers with similar welts, "Davey-tips". A protective welt shall be provided for the fourchette stitching, caught in the seaming of the fourchette and turned back over the bottom of the fingers. In addition, the top of the palm and fingers shall be reinforced with a flap which shall be caught in the seaming of the gauntlet, turned back, and sewed down to the gauntlet.

3.13.1.2 *Gauntlet.* The gauntlet shall be made in two pieces, each piece lined with cotton duck or laminated cotton fabric extending to within 3/8 inch of the top edge of the gauntlet to facilitate the hemming of the top edge. The hem shall be 1/2 to 5/8 inch wide. The remainder of the glove shall be unlined. The joining of the gauntlet and the "closing" shall be of "outseam" construction.

3.13.2 *Detailed.*

3.13.2.1 *Cutting.* Skins shall be dampened and all the stretch in the lengthwise direction pulled out before cutting gloves.

3.13.2.2 *Join palm to fourchette.* Lap the palm over the fourchette, position the welt piece on top on a line with the edge of the palm, with the grain of the leather of welt

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

over and against the grain of the leather of the palm. Unite welt, palm, and fourchette with a double row of stitching 1/16 to 3/32 inch gage; seam type LSa-2. The welt piece shall be so positioned that when turned back over the seam, it shall measure not less than 1/2 inch wide and match the grain of the palm. The contacting corners of the welt piece shall be caught in the seaming of the first finger and little finger respectively. The beginning and end of the stitching shall be securely backstitched with three stitches. Special care shall be exercised in the operation to avoid any twisting or distortion of the fingers.

3.13.2.3 *Join thumb and palm—"inseam" construction.* Seam the thumb to the palm all around the edge of the thumb; stitch type 301, seam type SSa-1. The welt strip shall be so positioned on top of the seam and caught in the stitching that when turned back it shall match the grain of the leather thumb. The welt strip shall extend to the top of the glove. The top edges of the thumb and welt shall be caught in the seam joining the gauntlet to the glove.

3.13.2.4 *Join fingers—"outseam" construction.* The end of each of the four fingers shall have protective welt strips like the welt strip of the thumb, positioned as indicated by notches on the patterns. Seam the backs to the fronts around the fingers with the welts laid on the seam and caught in the stitching, so positioned that when turned back, they shall match the grain of the finger leather. The seaming shall be so performed as to prevent any twisting or distortion of the fingers. The end of the seaming shall be securely backstitched about 1/2 inch; stitch type 301, seam type SSa-1.

3.13.2.5 *Back seam.* Lap the front of the glove over the back of the glove, as indicated on the patterns and unite with a double row of stitching 1/16-to 1/8-inch gage; stitch type 301, seam type LSa-2.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Contractor's inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection for acceptance. Inspection shall be in accordance with the provisions of MIL-STD-105 except where otherwise indicated herein. In addition to sampling inspection, as set forth in MIL-STD-105, process inspection will be performed during manufacture of the gloves to determine compliance with all required operations and processes which cannot be determined in the completely fabricated gloves. Any deviation found in process inspection may be cause for rejection of the end item or items.

4.2.1 *Inspection of components.* In addition to the quality assurance provisions of the applicable specifications and drawings, components and materials shall be tested as specified in 4.2.1.1 and 4.2.1.2.

4.2.1.1 *Leather testing.* The leather shall be tested for the characteristics in table IV. The test methods listed in table IV shall be in accordance with KK-L-311, wherever applicable. The sample unit for all required tests shall be one 8 by 8 inch piece of leather and the sample shall consist of 15 pieces; one piece selected from each 15 sides or fronts. Sampling procedure and location from which the sample unit is to be obtained shall be in accordance with the sampling of non-fabricated leather in Sampling and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE IV.—*Leather component tests*

Component and lot size expressed in terms of:	Characteristic	Requirement paragraph	Test Method	Requirement applicable to:		Number of determinations per sample unit	Results reported as	AQL
				Sample unit	Lot average			
Leather (when horsehide 1 front) (when cowhide 1 side)	Material identification	3.2.1	Std comm'l	X	—	1	Pass or Fail	6.5
	Tannage	3.2.1	Std comm'l	X	—	1	Pass or Fail	6.5
	Stitch tearing strength	3.2.1.3.1	2151[1]	—	X	—	—	N/A
	Flexibility (After soaking)	3.2.1.3.2	4.3.1	X	—	1	Pass or Fail	6.5
	Chromic oxide	3.2.1.3.3	6511 or 6515	—	X	—	—	N/A
	Chloroform extract	3.2.1.3.3	6311	—	X	—	—	N/A
	Ash, total	3.2.1.3.3	6421	—	X	—	—	N/A
	Acidity (pH)	3.2.1.3.3	6621	—	X	—	—	N/A
	Shrinkage temperature	3.2.1.3.3	7011[2]	—	X	—	—	N/A

[1] Exception to method 2151. A piece of steel wire 0.041±0.001 inch in diameter and not less than 4 inches in length shall be used in place of the soft metal. The wire shall conform to requirements for type I, size 1, large of Federal Specification FF-C-436. The thickness of the specimen need not be determined. Two holes each 5/64 inch in diameter shall be punched in one end of the specimen, the center of the holes being 1/4 inch from the end, 1/4 inch apart and located equidistant from the center line (lengthwise) of the specimen. The tearing strength of each of the specimens tested shall be recorded to the nearest pound.

[2] Exception to method 7011. The heating medium shall be water.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE V.—*Fabric component tests*

Component	Characteristic	Requirement reference	Test method
Face fabric	Material identification[1]	3.2.3	1200
	Weight (oz. per sq. yd.)[1]	3.2.3	5041
	Weave	3.2.3	Visual
Backing fabric	Material identification[1]	3.2.3	1200
	Weight (oz. per sq. yd.)[1]	3.2.3	5041
	Weave	3.2.3	Visual
Finished fabric	Weight (oz. per sq. yd.)	3.2.3	5041

[1] A contractor's certificate of compliance shall be acceptable for this characteristic.

Acceptance Procedures of KK-L-311. The test specimens shall be cut with long dimension perpendicular to the backbone. When the data in the "Number of determinations per sample unit" and the "Results reported as" columns are not specified in table IV, they shall be as required by the referenced test method.

4.2.1.2 *Fabric testing.* The fabric shall be tested for the characteristics in table V. The test methods listed in table V shall be in accordance with CCC-T-191, wherever applicable. Testing for all requirements listed in table V are applicable to the sample unit. The sample size shall be as follows:

Lot size (yards)	Sample size
800 or less	2
801 to 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more units fail to meet any requirements specified.

4.2.2 *Inspection of the end item.*

4.2.2.1 *Examination of the end item.* The defects found during examination of the end product shall be classified in accordance with 4.2.2.1.1 and 4.2.2.1.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.2.2.1.3. The sample unit for this examination shall be one glove. Selection of the sample shall be by pairs. The sample unit for pairing defects shall be one pair. Defects for pairing shall be classified as a single defect. The lot size shall be expressed in terms of one glove each.

4.2.2.1.1 *Visual examination of gloves.* The gloves shall be examined for defects in pairing, color, design, construction, material, workmanship, and marking as indicated in table VI.

TABLE VI.—*Classification of defects*

Examine	Defect	Classification	
		Major	Minor
Pairing	Not properly mated, e. g., not right and left of same size.	X	
	Not tacked together.		X
	Wide variation in color in the pair.		X
Color	Not as specified.	X	
	Color not uniform or shaded parts clearly noticeable.		X
Design	Any characteristic not in accordance with the specified requirements (unless otherwise classified herein).	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE VI.—*Classification of defects (Con't)*

Examine	Defect	Classification	
		Major	Minor
Cleanliness	Spots or stains, clearly noticeable.		X
Material	Any through hole, cut, tear, or rip.	X	
Leather, general	Not cowhide or horsehide (where specified).	X	
	Not full grain (where specified).	X	
	Not split leather (where specified).		X
	Cowhide leather is middle split or is cut from head, shoulder or belly split.	X	
Leather, except welt and reinforcements	Loose, spongy, or flanky.	X	
	Not soft and pliable.	X	
	Open vein.		X
	When applicable, grain damage penetrating deeply into leather fiber.	X	
	When applicable, grain damage not penetrating deeply into leather fiber.		X
	Deep open scratch or grub hole.	X	
	Scratch or grub or tick marks not penetrating deeply into leather filler.		X
	Deep fat wrinkles.	X	
	Deep flesh cut.	X	
	Any scar, brittle or bony area, weak or thin spot, or abraded area.	X	
	Cluster of healed grub marks or other healed damage.		X

TABLE VI.—*Classification of defects (Con't)*

Examine	Defect	Classification	
		Major	Minor
Leather, except welt and reinforcements (cont'd)	Flesh side of grain leather or either side of split leather not smooth or contains excessively loose flesh more than two square inches in total area.		X
	Not type specified.		X
Gauntlet lining	Any hole, cut, or tear.	X	
	Multiple floats, loose ends, smashes, or slubs.		X
	Any broken or missing pick, or end.		X
	Any mend in fabric (except restitching of seams).		X
Construction and workmanship	Any component or operation omitted.	X	
General (applicable to all components unless otherwise indicated herein).	Any component misplaced not serving purpose intended.		X
	Any component missing.	X	
	Any component or assembly damaged.	X	
	Any component not securely affixed, e.g., gauntlet loosely attached to back or palm of glove.	X	
	Any workmanship damage, e.g., scissor or knife cut.	X	
	Any mend in leather, e.g., patch, (not applicable to restitched seam repair).		
	Needle chews.	X	
Seams and stitching	Any open seam.	X	
	Note: When one or more stitches are		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE VI.—*Classification of defects (Con't)*

Examine	Defect	Classification	
		Major	Minor
Seams and stitching (cont'd)	broken or two or more consecutive skipped stitches or run-offs occur on a single stitched seam or on both rows of stitching on a double stitched seam, it shall be classified a *major* defect. When one or more stitches are broken or two or more consecutive skipped stitches or run-offs occur on only one row of a double stitched seam, it shall be classified as a *minor* defect.		
	Not specified seam type.	X	
	Not specified stitch type.	X	
	Any row of stitching omitted.	X	
	Loose stitch tension resulting in a loosely secured seam.	X	
	Tight stitch tension resulting in cutting of leather or breaking of stitches when normal pull is applied.	X	
	Ends of stitching not backstitched as specified.		X
	Gage of stitching irregular or not as specified.		X
	Any part caught in unrelated row of stitching	X	
	One or two stitches per inch less than specified.		X

TABLE VI.—*Classification of defects (Con't)*

Examine	Defect	Classification	
		Major	Minor
Seams and stitching (cont'd)	Three or more stitches per inch less than specified.	X	
	More than the specified maximum number of stitches per inch damaging leather.	X	
	More than the specified maximum number of stitches per inch not damaging leather.		X
Assembly detail	Glove not neatly laid off.		X
	Not outseam or inseam construction where specified.	X	
	Finger distorted or twisted affecting comfort of wearer.	X	
	Thread ends not trimmed throughout glove.		X
	Not properly trimmed or finished, e.g., lump or bulk in finger inseam because leather was not properly trimmed.	X	
	Not constructed with specified number of pieces of leather (except welting and reinforcements).	X	
	Welting reinforcing flap or reinforcements, missing, or not caught by stitching.	X	
	Binding loosely applied, or any edge not turned under and caught in stitching.		X
	Gauntlet not lined.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE VI.—*Classification of defects (Con't)*

Examine	Defect	Classification	
		Major	Minor
Marking	Missing, incomplete, incorrect, not legible, not specified size, not in proper location, or not accomplished in the specified manner.		X

4.2.2.1.2 *Dimensional examination.* The gloves shall be examined for dimensional defects including thickness of leather. Any dimension that is not within the established tolerance shall be classified a defect.

Note: Each leather part of the glove shall be checked for thickness, i.e., palm, thumb, and body of gloves. Any of these parts that are not within the required thickness range shall constitute a defect. (Thickness shall be determined in accordance with the procedure for "Fabricated-Leather Articles" of method 1011 of KK-L-311). Where glove parts are lined, the lining should be parted from the leather and the thickness of the leather should be taken doubled. This dimension is then divided by two.

4.2.2.1.3 *Inspection levels and acceptable quality levels (AQL's).* The inspection levels and acceptable quality levels, expressed in defects per 100 units, shall be as follows:

Examination	Inspection level	AQL	
		Major	Total
Paragraph 4.2.2.1.1	II	2.5	6.5
Paragraph 4.2.2.1.2	L-6	-	4.0

4.2.3 *Examination of preparation for delivery requirements.* An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be L-4 and the AQL shall be 4.0 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as: incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number per container is more or less than required.

4.3 Tests.

4.3.1 *Test for flexibility after soaking.* The specimen shall be 3 by 4 inches, cut with the long dimension perpendicular to the backbone. The specimen shall be folded in half, grain side out, to form a rectangle 3 by 2 inches (crease parallel to backbone), then carefully folded in half again to form a rectangle 3 by 1 (approx.) inch, 4 layers thick. The folded specimen shall be secured with staples across the width, 1/4 inch from each end. The ends shall be gripped between thumb and forefinger and the specimens shall be twisted torquewise 40 times by describing an angle of 180°. One end of the specimen shall then be fastened in the vise of the tester in such a way that the cut edges on the upper side face outward from the machine. The other end of the specimen shall extend 2 inches from the vise. The stiffness of the specimen shall be determined as specified in method 4211 of KK-L-311 by binding the specimen 20°, using a 1-inch span and a bending moment of 0.5 inch-pound. The results shall be recorded in pounds. The specimens shall then be immersed in distilled water of 140° ± 5°F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

(60° ± 3°C.) for 20 ± 2 hours; 1,000 ml. of water shall be used for 15 specimens. Complete immersion of the specimens shall be accomplished by placing a floating cover on the vessel used for the immersion. The specimens shall be removed, air-dried, conditioned for 72 hours and retested for stiffness as described for unsoaked specimens. The percent increase in flex stiffness shall be calculated as follows:

$$\frac{S_2—S_1 \times 100}{S_1}$$

Where:

S_2 is the average stiffness, in pounds, of the soaked specimens.

S_1 is the average stiffness, in pounds, of the unsoaked specimens.

5. PREPARATION FOR DELIVERY

(For civil agency procurement Fed Std. No. 102 shall be referred to for definitions and application of the various levels of packaging and packing.)

5.1 Packaging. Packaging shall be level A, or C, as specified (see 6.2).

5.1.1 *Level A.* Four pairs of gloves, of one size only, shall be evenly stacked in a bundle. The gloves shall be alternately reversed fingertip to gauntlet with the small fingers of each pair positioned in each corner of the bundle. Each glove bundle shall be securely tied with cotton tape or twine.

5.1.2 *Level C.* Gloves shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 *Level A.* Forty-eight pairs of gloves of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class weather-resistant, size 3 of MIL-B-17757. Level A packages shall be packed flat four in length, one in width, and three in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.2 *Level B.* Forty-eight pairs of gloves of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, size 3 of MIL-B-17757. Level A packages shall be packed flat four in length, one in width, and three in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.3 *Level C.* Gloves, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking

5.3.1 *Military requirements.* In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2 *Civil agencies.* In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

6. NOTES

6.1 Intended use. This glove is intended for use by linemen or others where contact with live wires is not involved.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

(*a*) Title, symbol and date of this specification.

(*b*) Size required (see 1.2).

(*c*) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Sample. For access to samples, address the procuring activity issuing the invitation for bids.

6.4 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Gloves, not otherwise indexed by name.
Carload minimum weight 20,000 pounds, subject to Rule 34, Uniform Freight Classification

Motor:

Gloves, not otherwise indexed.
Truckload minimum weight 12,000 pounds, subject to Rule 115, National Motor Freight Classification

Notice When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTERESTS:

Army—E M Q Sig
Navy—Sh S MC Y
Air Force—MAAMA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

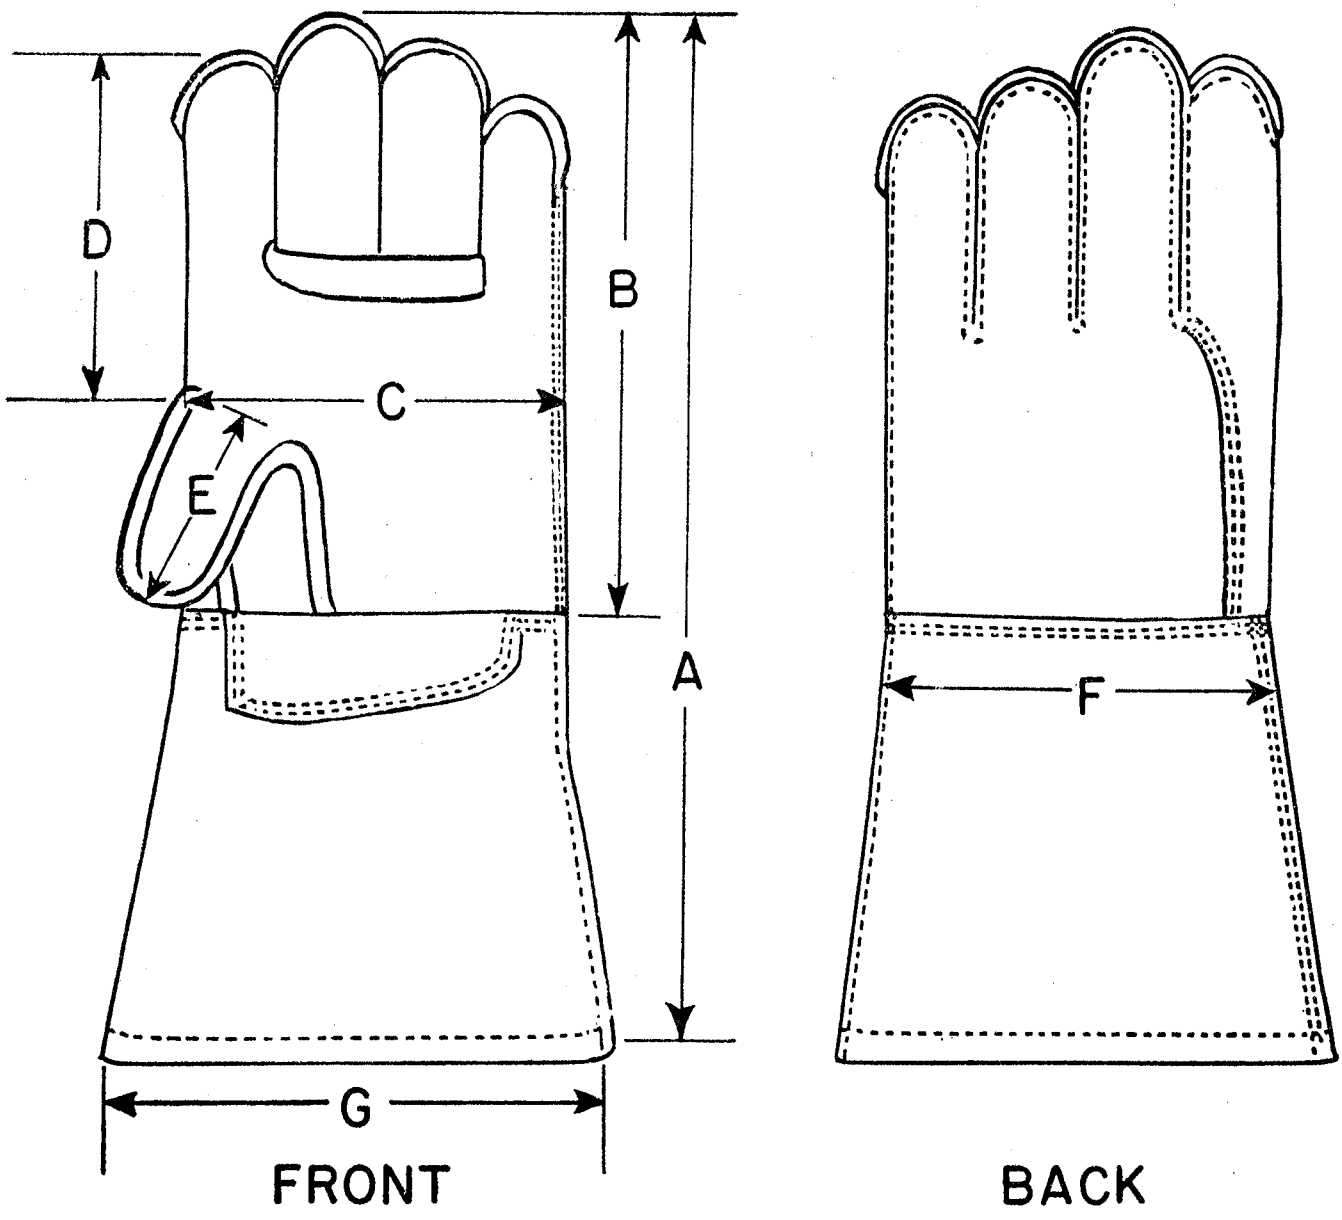


Figure 1.- Linemen's glove

Copies of this specification may be purchased nts each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.