KK-G-486a
DECEMBER 10, 1953
SUPERSEDING
Int. Fed. Spec. KK-G-486 (GSA-FSS)
26 October 1951 and in Part
Fed. Spec. KK-G-470
12 September 1949

FEDERAL SPECIFICATION

# GLOVES, WELDERS', LEATHER, GAUNTLET

*This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.*

## 1. SCOPE AND CLASSIFICATION

**1.1 Scope.**—This specification covers work gloves used by welders, but does not include protective or safety gloves in which a rubber insert is used.

**1.2 Classification.**

**1.2.1** *Grade and types.*—Leather gauntlet gloves covered by this specification shall be of one grade and of the following types, as specified:

Type I.—Welders' gloves, Montpelier pattern (see fig. 1).

Type II.—Welders' gloves, Gunn pattern (see fig. 2).

**1.2.2** *Sizes.*—The gloves shall be furnished in the following sizes, as specified (see tables II and IIa).

Small
Medium
Large
Extra large

## 2. APPLICABLE SPECIFICATIONS

**2.1** The following Federal Specifications, of the issues in effect on the date of the invitation for bids, form a part of this specification:

V-T-276—Thread, Cotton.
KK-L-311—Leather; Methods of Sampling and Testing.
CCC-D-771—Duck; Cotton, Plied Yarns (Army, Numbered, and Tent-Duck).
DDD-S-751—Stitches; Seams; and Stitching.
CCC-T-191—Textile Test Methods.

(Copies of Federal Specifications and the Index of Federal Specifications and Standards may be obtained upon application accompanied by check, money order, cash, or Government Printing Office coupons, to the General Services Administration, Business Service Center, Region 3, Seventh and D Streets SW., Washington 25, D. C. This office will also honor deposit account numbers issued by the Government Printing Office. Prices may be obtained from the Index of Federal Specifications and Standards or from the GSA Regional Offices. Single copies of this specification and other product specifications required for bidding purposes are available without charge at the GSA Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.)

**2.2** Specifications and other publications applicable only to individual departments are listed in section 7.

## 3. REQUIREMENTS

**3.1 Material.**

**3.1.1** *Leather.*—The leather used shall be as specified herein for the various types (see 3.7.1 and 3.8.1). The leather shall be chrome tanned, pliable, free from flesh cuts, sponginess, and other defects which may impair the serviceability. Slight salt stains, and grown-over cuts or scratches where the grain is not broken or the wearing quality of the leather is not impaired, will be permitted. When grain horsehide is used, it shall be full-grain horsehide fronts, i. e., sides with the butts trimmed off, the front shanks cut off, palms cut from cowhide, and shall be free from grub holes and deep wrinkles. When split cowhide is used, it shall be made from flesh split cowhide. Middle splits, head and shoulder, or belly splits shall not be used. Palms, thumbs, fingers, and backs shall be made from the best selected cuts.

**3.1.1.1** *Thickness of leather.*—The thickness of the leather shall be not less than 2½ ounces

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

nor more than 3½ ounces (1 ounce is equal to $\frac{1}{64}$ inch).

**3.1.1.2** *Stitch tearing strength.*—The stitch tearing strength of the leather used in the back and front of the gloves shall be not less than 800 pounds per inch of thickness.

**3.1.1.3** *Flexibility and shrinkage.*—The leather shall not lose its flexibility and the shrinkage shall be not more than 5 percent in any direction when subjected to the test described in 4.3.3.

**3.1.1.4** *Chemical requirements.*—The leather shall be fully chrome tanned and shall conform to the requirements of table I.

TABLE I.—*Chemical requirements*

| | Percent by weight | |
|---|---|---|
| | Minimum | Maximum |
| Chromic oxide (moisture- and grease-free basis) | 3.5 | |
| Chloroform extract (dry basis) | 10.0 | 20.0 |
| Acidity (pH) | 3.5 | |

**3.1.2** *Thread.*—Unless otherwise specified, the thread shall be 16/4 cord, unbleached cotton, conforming to the requirements for type IA1 of Federal Specification V-T-276.

**3.1.3** *Back lining.*—The back lining shall be a knitted-wool/cotton-plaited fabric. The face yarn shall be woolen spun yarn of 100 percent wool or not less than 50's grade (U. S. Standard) fleece or pulled wool. No reused or reprocessed wool or card waste or strippings shall be used. The backing yarn shall be a suitable cotton yarn and shall be not more than 30 percent of the weight of the fabric. The fabric shall be thoroughly scoured. The finished fabric shall conform to the following:

| | |
|---|---|
| Weight, ounces per square yard | 9 to 11. |
| Wales, per inch | 17 to 20. |
| Courses, per inch | 17, minimum. |
| Color | Unbleached, light gray, or tan. |

**3.2 Stitches, seams, and stitching.**—Unless otherwise specified, all stitching and seaming shall be done with stitch type 301 (lockstitch) and seam types as specified, in conformance with the requirements of Federal Specification DDD-S-751, using not less than 7 nor more than 10 stitches per inch. The beginning and end of all stitching shall be securely backstitched not less than 3 stitches. (See 3.7.4 and 3.8.3.)

**3.3 Color.**—The color of the gloves shall be cream or light gray.

**3.4 Dimensions of gloves.**—The finished gloves shall conform to the dimensions shown in tables II and IIa. Measurements shall be taken as shown in figures 1 and 2.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

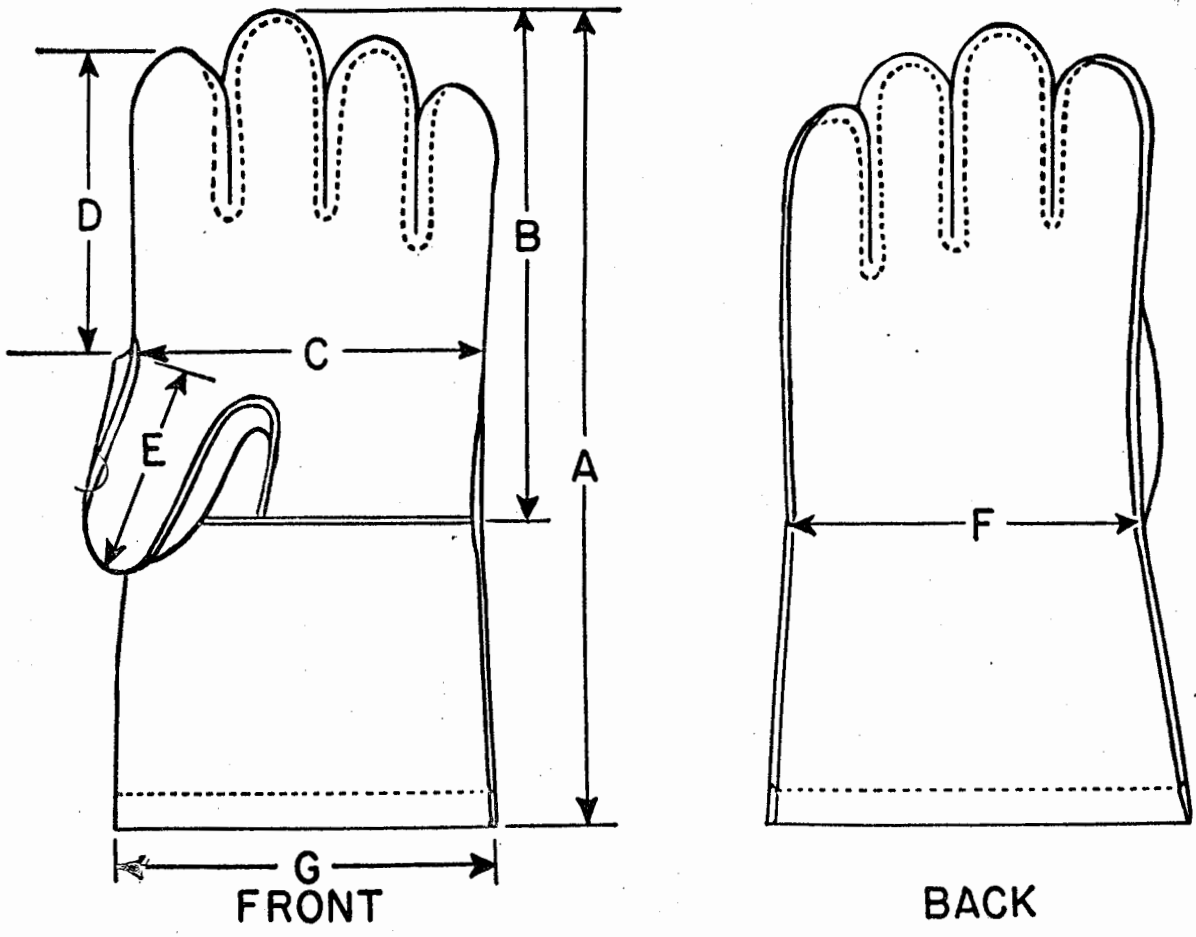



FIGURE 1.—Type I, welders' gloves, Montpelier pattern.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

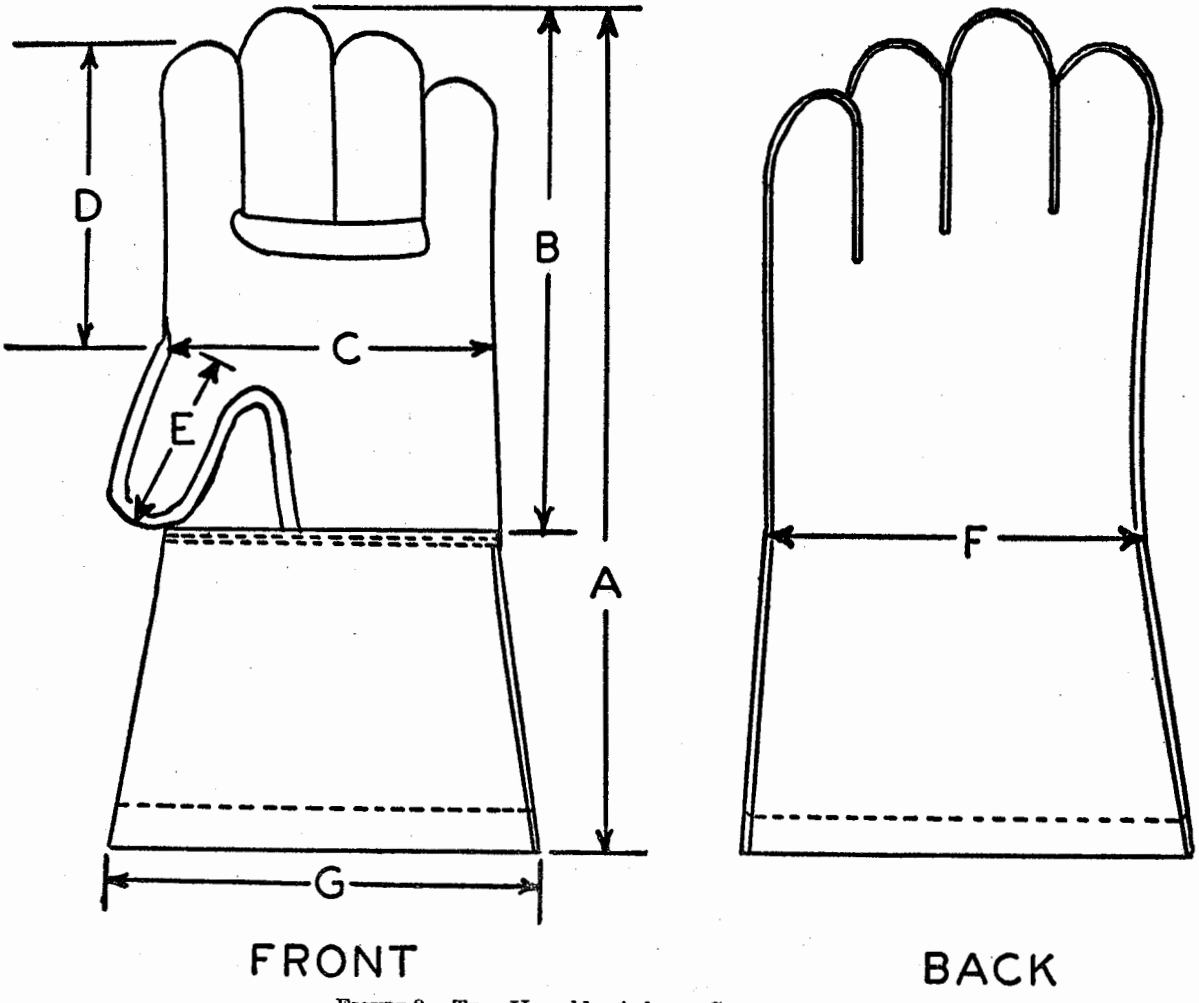



FIGURE 2.—Type II, welders' gloves, Gunn pattern.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE II.—*Finished dimensions of gloves*

| Measurement | Sizes | | | | Tolerance, plus or minus |
|---|---|---|---|---|---|
| | Small | Medium | Large | Extra Large | |
| | *Inches* | *Inches* | *Inches* | *Inches* | *Inch* |
| A—Top edge of cuff to tip of second finger | 12¾ | 13 | 13½ | 14 | ½ |
| B—Bottom edge of cuff to tip of second finger | 7¾ | 8 | 8½ | 8¾ | ¼ |
| C—Across palm at thumb crotch, seam to seam | 4½ | 5 | 5½ | 5¾ | ⅛ |
| D—Tip of index finger to thumb crotch | 4¾ | 5 | 5½ | 5¾ | ⅛ |
| E—Thumb crotch to tip of thumb | 2¾ | 3 | 3¼ | 3½ | ⅛ |
| F—Across bottom edge of cuff | 4¾ | 5 | 5½ | 6 | ¼ |
| G—Across top edge of cuff | 6¼ | 6¾ | 7 | 7¼ | ¼ |

TABLE IIa.—*Width, seam to seam, across face of thumb and fingers midway between crotch and tip*

| Measurement | Small | Medium | Large | Extra Large | Tolerance, plus or minus |
|---|---|---|---|---|---|
| | *Inches* | *Inches* | *Inches* | *Inches* | *Inch* |
| Thumb | 1¾ | 1⅞ | 2 | 2 | 1/16 |
| 1st finger | 2½ | 2⅝ | 2¾ | 2⅞ | 1/16 |
| 2d finger | 2½ | 2⅝ | 2¾ | 2⅞ | 1/16 |
| 3d finger | 2½ | 2⅝ | 2¾ | 2⅞ | 1/16 |
| 4th finger | 2⅜ | 2½ | 2⅝ | 2¾ | 1/16 |

**3.5 Pairing.**—The gloves shall be well matched and paired, and securely stitched or stapled together.

**3.6 Marking.**—Each glove shall have the size printed plainly on the inside of the back near the hem of the cuff.

**3.7 Type I welders' gloves, Montpelier pattern.**

**3.7.1** *Leather.*

**3.7.1.1** *Front.*—The palm, thumb, and fourchettes shall be of split-horsehide leather. The gauntlet piece shall be of split-horsehide or cowhide leather.

**3.7.1.2** *Back.*—The one-piece back shall be of full-grain-horsehide leather.

**3.7.1.3** *Reinforcing welts.*—The welts shall be of grain-horsehide or cowhide leather.

**3.7.1.4** *Dimensions of reinforcements.*—The fourchette strips shall be approximately ¾ inch wide. The welt strips for reinforcing seams shall be cut approximately 7/32 inch wide.

**3.7.2** *Design.*—Type I gloves shall be of the pattern known commercially as Montpelier, as shown in figure 1. The gloves shall be made of two sections, a front and a back. The front section shall be composed of a separate piece and thumb-palm-finger piece. The back section shall be made in one piece with the gauntlet, thumb, back, and fingers continuous. The gauntlets of both the front and the back shall be lined with cotton duck; in addition, the back section shall be lined from the bottom edge of the gauntlet duck lining to the ends of the fingers with knitted fabric. The palm, thumb, and fingers of the front section shall be unlined.

**3.7.3** *Construction.*—The gauntlet piece shall be lined with the cotton duck to within ⅜ inch of the top edge of the gauntlet to facilitate the hemming of the top edge, and the gauntlet and duck joined to the palm and thumb by "inseam" construction with a protective welt strip inserted and caught in the seaming. The back of



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

the glove shall be made in one continuous piece of leather and lined throughout; the gauntlet portion shall be lined with cotton duck and the remaining area with the knitted fabric, joined to the top edge of the duck lining and extending to the ends of the fingers. The thumb shall be joined to the palm by "inseam" construction with an "all-around" welt strip inserted and caught in the seaming. The fronts shall be joined to backs by "inseam" construction with a welt strip caught in the seaming from the top of the glove to the top of the little finger and the seaming continued around the fingers. The closing shall be of "inseam" construction with a protective welt strip extending from the top of the first finger, inserted and caught in the seaming.

3.7.4 *Stitching and seaming.*—Stitches and seams of type I gloves shall conform to the requirements of table III. (See 3.2.)

TABLE III.—*Stitches and seams in type I welders' gloves, Montpelier pattern*

| Operation | Rows of stitching | Gage | Seam and stitching types |
|---|---|---|---|
| Making lining for backs | Double | 1/8 to 5/16 | LSa–2 |
| Hemming fronts and backs. | Single | -------- | EFa–1 |
| Joining thumb to palm | Single | -------- | SSa–1 |
| Joining gauntlet to palm. | Single | -------- | SSa–1 |
| Closing | Single | -------- | SSa–1 |

**3.8 Type II welders' gloves, Gunn pattern.**

3.8.1 *Leather.*—Type II gloves shall be of split-cowhide leather; welts shall be split cowhide.

3.8.2 *Design.*—Type II gloves shall be of the pattern known commercially as Gunn-cut, as shown in figure 2. The face of the thumb, the palm, and the first (index) and fourth (little) fingers shall be made of one piece of leather. The back shall be of one piece and shall include the backs of the fingers and gauntlet. The palm sides of the second and third fingers shall be of one piece. The back of the thumb shall be of one piece. The gauntlet cuffs shall be made of two pieces (front and back) and shall be fully lined or faced with cotton duck. The facing may be of one or two pieces. The front and back of the facings shall be cut shorter than the outside of the cuffs, and the outside of the cuffs shall be turned over the top and stitched to form a self-binding. There shall be a lining in the back extending from the bottom of the gauntlet facing to within 1/2 inch of the tip of the finger.

3.8.3 *Stitches and seams.*—All seams with the exception of the seam at the base of second and third fingers shall be leather welted and welts shall protrude from seams not more than 1/8 inch. Seam at base of second and third fingers shall be covered with a leather flap. Top edge of back lining shall be lapped under the bottom edge of gauntlet lining. Back knitted lining shall be caught in finger and closing seams. Stitches and seams shall conform to table IV and paragraph 3.2.

TABLE IV.—*Stitches and seams in type II gloves*

| Operation | Rows of stitches | Seam types |
|---|---|---|
| Thumb, finger and closing seams | Single | SSj–1 |
| Base, 2d and 3d fingers to palm | Double | LSa–2 |
| Back lining to gauntlet lining | Double | LSa–2 |
| Palm and back of thumb to gauntlet | Double | LSa–2 |
| Gauntlet hem | Single | EFa–1 |

**3.9 Workmanship.**—The finished gloves shall be clean, well made, well formed, and free from defects which affect the appearance or which may affect the serviceability. The color of all component parts shall match as closely as possible.

## 4. SAMPLING, INSPECTION, AND TEST PROCEDURES

**4.1 Sampling.**

4.1.1 *Materials.*—When specified in the invitation for bids, the contractor shall furnish samples of the following items taken from materials used in the manufacture of the gloves:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

| Material | Sample size |
|---|---|
| Thread | Not less than 60 yards. |
| Duck | One square yard. |
| Backlining | One square yard. |

4.1.2 *Gloves.*

4.1.2.1 *Formation of lots.*—Lots of each type and size shall be formed as described in 3.1 of section 6 of Federal Specification KK–L–311.

4.1.2.2 *Sampling for inspection.*—Samples for inspection shall be taken as described in 3.2, section 6, of Federal Specification KK–L–311.

4.1.2.3 *Sampling for physical and chemical tests.*—Samples for test shall be taken as described in 3.3.1 and 3.3.3 of section 6 of Federal Specification KK–L–311.

4.2 **Inspection.**—Each unit in the sample shall be inspected for color, pairing, marking, type of seam and stitching, design, construction, workmanship, and type of leather, and defects.

4.2.1 *Dimensions.*

4.2.1.1 The thickness of the leather shall be determined as described in 4.2.1 of method 1011 of Federal Specification KK–L–311, except that 5.1 shall not apply to this specification. (See 4.2.1.3.)

4.2.1.2 The dimensions in table II and gage of seams in table III shall be determined as described in method 1211 of Federal Specification KK–L–311, except that 5.1 shall not apply to this specification.

4.2.1.3 *Number of units to be measured for dimensions.*—If the sample contains 20 or less units, all the units shall be measured. If the sample contains 20 or more units, at least 20 units or at least 40 percent of the units in the sample for inspection, whichever is larger, shall be measured.

4.3 **Tests.**

4.3.1 *Specimens for physical tests.*—Specimens for physical tests shall be taken from the test unit as required in the applicable method of test.

4.3.2 *Specimens for chemical tests.*—Specimens for chemical tests shall be taken from the composite sample prepared as described in method 6002 of Federal Specification KK–L–311 as required in the applicable method of test.

4.3.3 *Shrinkage.*—To determine conformance with the requirements of 3.1.1.3, the leather shall be tested as follows: Two sets of two gage marks, 2 inches apart, shall be placed at right angles to each other on a specimen of the leather. The specimen shall then be heated to a temperature of 85°±2.5° C. and then quickly immersed in water at 20°±5° C. The specimen shall be allowed to soak for 5 minutes, removed and dried at 85°±5° C. for a period of 5 minutes and removed and dried at 85°±2.5° C. One specimen from each test unit shall be tested.

4.3.4 *Thread.*—The thread shall be tested as described in Federal Specification V–T–276.

4.3.5 *Duck.*—The gauntlet-cuff facing material shall be tested as described in Federal Specification CCC–D–771.

4.3.6 *Backing.*—Tests of the back lining shall be made as described in the following methods of Federal Specification CCC–T–191:

| Test | Method No. |
|---|---|
| Weight | 5041 |
| Wales and courses | 5070 |
| Wool identification | 1100 |
| Cotton identification | 1200 |
| Wool content | 2101.1 |

4.3.7 *Other tests.*—Other physical and chemical tests shall be made as described in the following methods of Federal Specification KK–L–311:

| Test | Method No. |
|---|---|
| Stitch tearing strength | 2151 |
| Chromic oxide | 6511 or 6515 |
| Chloroform extract | 6311 |
| Acidity (pH) | 6621 |

4.4 **Acceptance of lot.**—A lot of leather shall be considered as meeting the requirements of this specification if the conditions described in paragraph 5 of section 6 of Federal Specification KK–L–311 are fulfilled.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

## 5. PREPARATION FOR DELIVERY

**5.1 Packaging.**—Commercial packages will be acceptable.

**5.2 Packing.**—The subject commodity shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maximum protection from normal hazards.

**5.3 Marking.**

**5.3.1** *Issue packages.*—Issue packages shall be marked with the name, type, and size of the commodity, the quantity contained therein, and the names of the contractor and the manufacturer.

**5.3.2** *Shipping containers.*—Shipping containers shall be marked with the name, type, and size of the commodity as defined by the contract or order under which the shipment is made, the quantity of each type and size contained therein, the name of the contractor, the number of the contract or order, the name and address of the consignee, and the gross weight.

## 6. NOTES

**6.1 Ordering data.** — Purchasers should specify the type and size of glove and should exercise any desired options offered herein. (See 1.2.1, 1.2.2, 3.1.2, 3.2, and 4.1.1.)

**6.2 Transportation description.** — The transportation description applicable to these items is:

Gloves, not otherwise indexed by name.
In boxes or in package 277.
Carload weight 12,000 pounds subject to Rule 34, Consolidated Freight Classification.
In boxes.
Truckload weight 12,000 pounds.

**Patent notice.**—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

## 7. DEPARTMENTAL REQUIREMENTS

**7.1** The following specifications, standards, and other publications of the issues in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments.

**7.2 Army, Navy, and Air Force.**

**7.2.1** *Applicable specifications and standards:*

*Federal Specifications:*
UU-P-268—Paper, Kraft, Wrapping
LLL-B-631—Boxes; Fiber, Corrugated (For Domestic Shipment).

*Military Specifications:*
JAN-P-103—Packaging and Packing for Overseas Shipment—Boxes; Wood Cleated, Solid Fiberboard.
JAN-P-105—Packaging and Packing for Overseas Shipment—Boxes; Wood Cleated, Plywood.
JAN-P-106—Packaging and Packing for Overseas Shipment—Boxes; Wood Nailed.
JAN-P-108—Packaging and Packing for Overseas Shipment—Boxes, Fiberboard (V-Board and W-Board) Exterior and Interior.
JAN-P-125—Packaging and Packing for Overseas Shipment — Barrier — Materials, Waterproof, Flexible.
MIL-A-140—Adhesives, Water-Resistant, Waterproof Barrier Material.

*Navy Department Specification:*
General Specifications for Inspection of Material.

*Military Standards:*
MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MID-STD-129—Marking of Shipments

*Bureau of Supplies and Accounts Publication:*
Navy Handbook on Packing and Materials Handling—Packaging, Packing, and Marking of Clothing, Small Stores, and Textiles.

(Copies of specifications, standards, and drawings required by the contractor in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

**7.2.2** *Label.*—Each glove shall have a combination size-and-contractor's label applied by dry-heat transfer to the inside of the back of the glove, at the center, about ½ inch down from the finished top edge. The imprint of the marking shall be in boldface yellow or white type, with the lettering and numerals in clear outline and readily visible. The imprint shall contain the following information, with the size number not less than ½ inch in height and the rest of the information ⅛ inch in height:

Stock number
Nomenclature (see invitation for bids)
Size
Name of contractor
Contractor's number
Federal Specification KK–G–486a
U. S. Property

**7.2.3** *Design—Type II (Army only).*—Type II gloves shall be of the pattern known commercially as Gunn-cut, as shown on figure 2. The face of the thumb, the palm, and first (index) and fourth (little) fingers shall be of one piece of leather. The back shall be of one piece and shall include the backs of the fingers and gauntlet. The palm side of the second and third fingers shall be of one piece. The back of the thumb shall be of one piece. The front of the gauntlet shall be of one piece and gauntlets (front and back) shall be full lined with laminated cotton fabric. The front and back of the linings shall be cut shorter than the outside of the gauntlet and the outside of the gauntlet shall be turned over the top and stitched to form a hem. There shall be a knitted lining in the back extending from the bottom of the gauntlet lining to the tips of the fingers. The lining shall be attached to the tips.

**7.2.3.1** *Gauntlet lining (Army only).*—The gauntlet-lining fabric shall be composed of two thicknesses of cotton fabric securely laminated together. The face fabric shall be a cotton twill weighing not less than 5.0 ounces per square yard. The back fabric shall be a plain-weave cotton fabric weighing not less than 2.5 ounces per square yard. The finished fabric (laminated) shall contain not less than 14 ounces of natural rubber, synthetic rubber or synthetic resin and weigh not less than 21.5 ounces per square yard.

**7.2.4** *Sampling, inspection, and test procedures.*

**7.2.4.1** Sampling shall be conducted in accordance with Military Standard MIL–STD–105.

**7.2.4.2** *Inspection.*

**7.2.4.2.1** *Army and Air Force.*—Inspection will be made by the Government to determine compliance with the requirements of this specification.

**7.2.4.2.2** *Navy.*—For Naval purchases the general inspection procedures shall be in accordance with General Specifications for Inspection of Material.

**7.2.4.2.2.1** *Sampling for lot acceptance.*

**7.2.4.2.2.1.1** *Inspection lot.*—All pairs of gloves of the same type and size presented at one time shall be considered a lot for purposes of acceptance inspection and tests.

**7.2.4.2.2.1.2** *Sampling for inspection.*—A random sample of pairs of gloves shall be selected from each inspection lot of material offered for Government inspection of visual and dimensional characteristics, with lot acceptance based on the following sampling inspection requirements in accordance with Military Standard MIL–STD–105.

TABLE V.—*Sampling for visual and dimensional inspection A. Q. L. (approx.)=2.5 percent defective*

| Number of pairs of gloves in an inspection lot | Number of pairs of gloves in sample | Acceptance number (defectives) | Rejection number (defectives) |
|---|---|---|---|
| 40 or under | 10 | 0 | 1 |
| 41 to 110 | 15 | 1 | 2 |
| 111 to 300 | 25 | 1 | 2 |
| 301 to 500 | 35 | 2 | 3 |
| 501 to 800 | 50 | 3 | 4 |
| 801 to 1300 | 75 | 4 | 5 |
| 1301 and over | 110 | 6 | 7 |

**7.2.4.2.2.1.3** *Sampling for lot acceptance tests.*—A random sample of pairs of gloves shall be selected from each inspection lot in accordance with the following table, and shall be subjected to each of the tests specified in 4.3.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE VI.—*Sampling for lot acceptance tests*

| Number of pairs of gloves in inspection lot | Number of pairs of gloves in sample |
|---|---|
| 500 or under | 2 |
| 501 to 1300 | 3 |
| 1301 to 3200 | 4 |
| 3201 and over | 5 |

**7.2.4.2.2.2** *Visual and dimensional inspection.*—Each of the sample pairs of gloves selected in accordance with table V shall be visually and dimensionally inspected by the Government inspector to verify compliance with the requirements of this specification. Any pair of gloves in the sample containing one or more visual or dimensional defects shall be rejected, and if the number of defective pairs of gloves in any sample exceeds the acceptance number for that sample the lot represented by the sample shall be rejected. Rejected lots may be offered again for Government inspection provided the contractor has repaired or removed all nonconforming pairs of gloves. The Government inspector shall again select and examine samples from such resubmitted lots to verify compliance with the specification requirements.

**7.2.5** *Packaging, packing, and marking.*

**7.2.5.1** *Packaging.*

**7.2.5.1.1** *Army and Air Force.*—Four pairs of gloves shall be stacked together in a bundle, pairs alternately reversed lengthwise and widthwise to form a compact bundle. Each bundle of gloves shall be wrapped in kraft paper conforming to Federal Specification UU-P-268, having a basic weight of not less than 50 pounds per ream (24 x 36—500) and securely sealed with gummed kraft paper tape.

**7.2.5.1.2** *Navy.*—Packaging and preparation for shipment shall be in accordance with the requirements for "Gloves, Gauntlet, Leather", of the Navy Handbook on Packing and Materials Handling—Packaging, Packing, and Marking of Clothing, Small Stores, and Textiles.

**7.2.5.2** *Packing.*

**7.2.5.2.1** *Army and Air Force (domestic shipment).*—Forty-eight pairs of gloves, unless otherwise specified by the contracting officer, packaged as specified in 7.2.5.1.1 shall be packed in a snug-fitting corrugated fiber box conforming to style RSC of Federal Specification LLL-B-631 except that the fiberboard shall have a minimum bursting strength of 275 pounds per square inch. The gloves shall be arranged in each box two bundles in length, three bundles in width, and two bundles in depth. The box size shall be determined by the contractor. All flaps of each box shall be securely sealed with a good-quality adhesive applied throughout the entire area of contact between the flaps.

**7.2.5.2.2** *Army and Air Force (overseas shipment).*—Forty-eight pairs of gloves, packaged as specified in 7.2.5.1.1, shall be packed in boxes constructed and strapped to conform to the requirements of one of the following specifications:

JAN-P-103—Boxes; Wood Cleated; Solid Fiberboard; Style A or B.
JAN-P-105—Boxes; Wood Cleated Plywood; Style A or B.
JAN-P-106—Boxes; Wood, Nailed; Style 2 or 4.
JAN-P-108—Boxes; Fiberboard (V-Board and W-Board), Exterior and Interior; exterior style RSC.

Only one style and size of box shall be used for any one contract. The gloves shall be arranged in the box as specified for domestic shipment.

**7.2.5.2.2.1** *Exterior box.*—Each exterior shipping box shall be provided with a sealed case liner or prefabricated bag made of waterproof barrier material conforming to type L-2 or M of Military Specification JAN-P-125. Closure and seams shall be completely sealed with a continuous seam ¾-inch minimum width water-resistant adhesive conforming to Military Specification MIL-A-140.

**7.2.5.2.3** *Navy.*—See 7.2.5.1.2.

**7.2.5.3** *Marking.*

**7.2.5.3.1** *Army, Navy, and Air Force.*—Interior packages and shipping containers shall be marked in accordance with Military Standard MIL-STD-129.

**NAVY INTEREST: A MC Or Sh S Y.**



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.