FEDERAL STANDARD STOCK CATALOG

# Section IV

## (Part 5)

## FEDERAL SPECIFICATION

FOR

# HANDLES; MOP

This specification was approved by the Director of Procurement, for the use of all departments and establishments of the Government, and shall become effective not later than November 1, 1934. It may be put into effect, however, at any earlier date after promulgation.

### A. APPLICABLE FEDERAL SPECIFICATIONS

**A–1.** There are no other Federal specifications applicable to this specification.

**A–2.** Any special requirements of the individual departments of the Government are noted under section H.

### B. TYPES, GRADES, AND CLASSES

**B–1.** Mop handles, in accordance with this specification, shall be furnished in one grade and in the following types and classes:

Type I. Screw type: Class A. Malleable-iron-head
Type II. Spring-lever type: Class A. Malleable-iron-head

### C. MATERIAL AND WORKMANSHIP

**C–1.** *Material.*—Mop handles shall be of good quality material, and shall be free from defects that might affect their serviceability.

**C–1a.** *Kind of wood for stick.*—The wood shall be red or white oak, sugar maple, red gum, birch, beech, fir, hickory, elm, ash, douglas fir, or southern yellow pine.

**C–2.** *Workmanship.*—Mop handles shall be of good workmanship and in accordance with the best commercial practice. They shall all show a smooth finish due to sand and waxing belt operation.

### D. GENERAL REQUIREMENTS

**D–1.** All mop handles shall be stamped or otherwise permanently marked in a legible manner with the manufacturer's name or known trade mark, so that the name of the maker may be readily determined at any time.

**D–2.** Metal portions of the mop handles shall be well secured and free from burs or roughened spots that may scratch the hands of the user or entangle the mop.

457476 O - 42

Source: https://assist.dla.mil -- Do
Check the source to verify that this i

**E. DETAIL REQUIREMENTS**

**E–1.** *Type I.*—Handles, mop, screw-type, as specified herein, shall consist essentially of a wood stick and metal fixtures for holding the mop. The over-all length of mop handles shall be 54 inches with an allowable minus tolerance of 2 inches.

**E–1a.** *Stick.*—The stick shall be made of thoroughly seasoned suitable wood. The stick shall be straight and uniform in diameter. It shall be smoothly turned, sanded, and rounded at the top end. The stick shall be 1⅛ inches in diameter. A minus tolerance of 1/32 inch shall be allowed in the diameter.

**E–1b.** *Metal fixtures.*—The metal fixtures for holding the mop shall consist essentially of a bail, a head, and a screw pin.

**E–1b (1).** *Bail.*—The bail shall be made of steel wire 0.243 inch in diameter and shall be securely fastened to the stick in an approved manner and strengthened with a steel, a cast iron, or a malleable iron ferrule. The inside dimension of the end of the bail shall be 6½ inches with an allowable minus tolerance of ⅛ inch. When the head shall be raised to a maximum, there shall be an opening of at least 1½ inches between the end of the bail and the head to provide for the insertion of the mop.

**E–1b (2).** *Head.*—The head shall be made of malleable iron.

**E–1b (3).** *Screw-pin.*—The screw pin shall be made and threaded to accommodate a ⅜-inch wing nut provided for the adjustment of the head.

**E–1c.** *Finish.*—The bail, head, screw pin, and wing nut shall be plated with cadmium, nickel, or zinc.

**E–1d.** *Illustration.*—Screw-type mop handles shall be similar to the sketch shown below: (See par. I–5.)

**E–2.** Type II.—Handles, mop, spring-lever-type, as specified herein, shall consist essentially of a wood stick and metal fixtures for holding the mop. The overall length of mop handles shall be 54 inches with an allowable minus tolerance of 2 inches.

**E–2a.** *Stick.*—The stick shall be as specified under Paragraph E–1a.

**E–2b.** *Metal-fixtures.*—The metal-fixtures for holding the mop shall consist essentially of a bail, a head, and a spring, collar, and lever.

**E–2b (1).** *Bail.*—The bail shall be made of steel wire 0.177 inch in diameter securely fastened to the lever in an approved manner. The inside dimension of the bail shall be 6½ inches with an allowable minus tolerance of ⅛ inch. When the lever is fully raised there shall be an opening of at least 1¼ inches between the end of the bail and the head for the insertion of the mop.

**E–2b (2).** *Head.*—The head shall be made of malleable iron. The head shall be securely fastened to the stick by a nail, screw, or staple.


**E–2b (3).** *Spring, collar, and lever.*

**E–2b (3) a.** *Spring.*—The spring shall be made of spring steel wire 0.1350 inch in diameter. It shall be so constructed that sufficient pressure shall be produced to maintain the mop in a secure position.


**E–2b (3) b.** *Collar.*—There shall be provided a collar made of malleable iron or heavy pressed steel. The collar shall be placed between the spring and lever and shall be securely fastened to the lever.

Document Center -- Dov
Check the source to verify that this is

**E–2b (3) c.** *Lever.*—The lever shall be made of pressed steel. A steel 0.049 inch thick shall be used if lever is embossed for added strength and 0.061 inch thick shall be used if lever is plain.

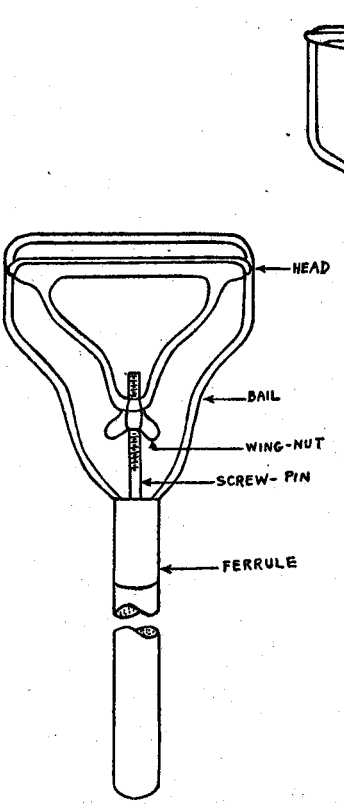


TYPE I
Handles, Mop, Screw Type.

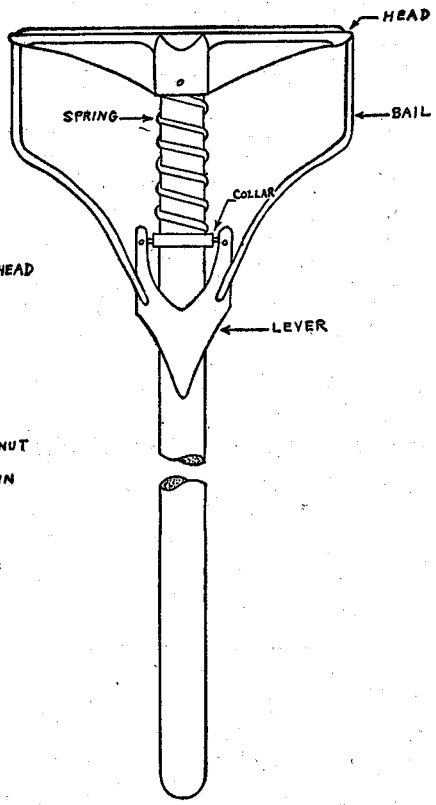


TYPE II.
Handles, Mop, Spring Lever Type.

**E–2c.** *Finish.*—The head, lever, and collar shall be given a copper sulfate (blue vitriol) dip after forming. The spring and bail shall be of mill-coppered wire.

**E–2d.** *Illustration.*—Spring-lever-type mop handles shall be similar to the sketch shown below. (See par. E–5).

Source: https://assist.dla.mil -- Dow
Check the source to verify that this is

F. METHODS OF SAMPLING, INSPECTION, AND TESTS.

F–1. Any requirements applicable to the individual departments are noted under section H.

F–2. Mop handles shall be inspected to determine whether they comply with this specification.

G. PACKAGING, PACKING, AND MARKING

G–1. Any special requirements of the individual departments are noted under section H.

G–2. *Packaging and packing.*—Unless otherwise specified, commercial methods of packaging and packing that would insure acceptance by common or other carriers, for safe transportation, at the lowest rate, to the point of delivery, would be acceptable under this specification.

G–3. *Marking.*—Unless otherwise specified, shipping packages shall be marked with the name of the material, the type, and the quantity contained therein, as defined by the contract or order under which the shipment is made, the name of the contractor, and the number of the contract or order.

H. REQUIREMENTS APPLICABLE TO INDIVIDUAL DEPARTMENTS

H–1. The following departmental specifications of the issue in effect on date of invitation for bids shall form a part of this specification.

H–1a. Army: United States Army Specification No. 100–2, Standard Specification for Marking Shipments.

H–1b. Navy: Navy Department General Specification for Inspection of Material, copies of which may be obtained without cost upon application to the Bureau of Supplies and Accounts, Navy Department, Washington, D.C.

I. NOTES

I–1. Purchasers should exercise all options offered herein, and should specify type, class, etc., required.

I–2. It is believed that this specification adequately describes the characteristics necessary to secure the desired material, and that normally no samples will be necessary prior to award to determine compliance with this specification. If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids, and the particular purpose to be served should be definitely stated, the specification to apply in all other respects.

I–3. When so requested, bidder on schedules or requisitions shall submit, free of expense to the Government, for examination and test, sample mop handles similar to those they propose to furnish. Samples shall remain the property of the exhibitor, but a sample may be accepted as part of a delivery, in the case of a successful bidder. However, the right is reserved to destroy the sample submitted if such action is necessary to determine the quality of the material and method of manufacture, in which case no expense to the Government shall accrue.

Source: https://assist.dla.mil -- Dow
Check the source to verify that this is

I–4. After such tests as are required have been made, contract will be awarded for mop handles which it is considered to be for the best interests of the Government to purchase.

I–5. The illustrations are included for the convenience of those interested and are not intended to preclude purchases which are otherwise in accordance with specifications.

I–6. Users are requested to retain this specification in permanent file until a revision is issued.

I–7. An alphabetical index of Federal specifications may be purchased as noted in paragraph next below, price to be obtained from the Superintendent of Documents.

I–8. Copies of this specification may be obtained upon application, accompanied order, or coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington, D.C. Price, 5 cents.

**Notice.**—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights of permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Down
Check the source to verify that this is t