FEDERAL SPECIFICATION

SANDER, DISK AND OSCILLATING PAD,

PNEUMATIC, PORTABLE

This amendment, which forms a part of Federal Specification OO-S-101B, dated June 25, 1973, was approved by the Commissioner, Federal Supply Service, General Services Administration for the use of all Federal agencies.

PAGE 3

Paragraph 3.3.1: Delete and substitute:

"3.3.1 Materials. The materials used in the construction of all components shall be sound, of uniform quality and condition, and shall be capable of completing the examinations and tests specified herein. All components shall be new and unused. Repaired or reconditioned components are not acceptable."

Paragraph 3.5: Delete and substitute:

"3.5 Throttle. The sander shall be equipped with a lever-type throttle that shall automatically shut off the air supply to the motor when hand pressure on the lever is released. When specified (see 6.2), a button-type throttle, conforming to these requirements, shall be furnished."

Paragraph 3.6: Delete and substitute:

"3.6 Lubrication. Provisions shall be made for lubrication to be supplied to the rotor, cylinder, and other moving components. The specific lubricant shall be applied in the manner and quantity as specified by the manufacturer."

Paragraph 3.7: Delete second sentence and substitute "The inlet shall be equipped with an air filter made of 20 mesh or finer material."

PAGE 5


Table II: Delete entire sixth column. Opposite Style 2, change "5000 no load speed" to "3500"; "0.60 horsepower" to "0.40"; and "weight 9" to "7 pounds".

PAGE 6

Paragraph 3.17.3: Delete second and third sentences and substitute "The motor axis shall be at a right angle to the sander spindle. The gear reduction spindle head and the motor shall be designed as an integral unit, not an accessory to a motor. The spindle shall have a 5/8 - 11 thread for mounting the sanding pad. The distance from the face of the pad to the opposite end of the spindle housing shall be not more than 5 inches. The removable side handle shall be mounted at 90° to 120° from the centerline of the motor."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

Figure 4: Delete and substitute:

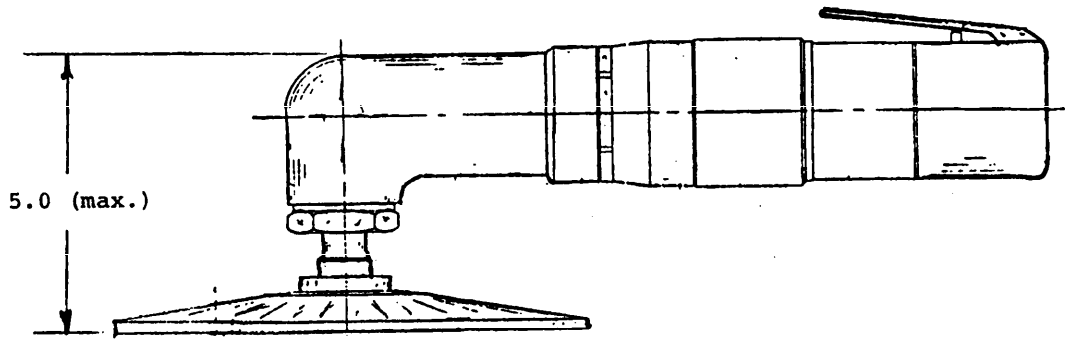

PAGE 7

Paragraph 4.6: Add the following to first sentence "and tested as specified in 4.8.2 and 4.8.4.2."

Paragraph 4.8.1: Delete and substitute:

"4.8.1 Test conditions. The performance tests shall be conducted with the sander operating on an air pressure of 90 PSIG ± 2 PSIG or the specific pressure noted in the marking on the sander. The air pressure gage shall be installed as close as practicable to the sander and be connected to an air consumption meter by a 10-foot section of 5/16-inch inside diameter air hose."

PAGE 9

Paragraph 6.3: Delete last sentence.

U. S. GOVERNMENT PRINTING OFFICE : 1975 - 585-699/2647

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.