
FED. SUP CLASS
5950

RATINGS

STYLE	LT4
GRADE	1
CLASS	B
MAXIMUM OPERATING TEMPERATURE	129°C
TEMPERATURE RISE	39°C
AMBIENT TEMPERATURE	90°C
WORKING VOLTAGE	535 VOLTS
TERMINAL PULL	5 POUNDS
ALTITUDE	70,000 FEET

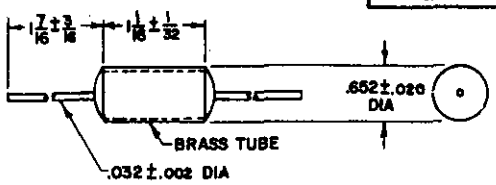

ALL DIMENSIONS IN INCHES

ELECTRICAL CHARACTERISTICS (INITIAL)

Dash No. 1/	Type designation	Replaced MS part no. MS16442 Rev. C	Replaced type designation and MS part no. for MS16442 Rev. B: Type designation	Replaced type designation and MS part no. for MS16442 Rev. B: Part No.	Inductance	Q min.	Test frequency	Self-resonant frequency min.	DC resistance max.	Rated dc current 2/
					uh		Mc	Mc	Ohms	ma
-1	LT4K131	MS16442-1	LT7K048	MS16442-1	150 ± 5%	35	.790	6.3	4.30	365
-2	LT4K132	MS16442-2	LT7K049	MS16442-2	180 ± 5%	33	.790	5.7	4.82	345
-3	LT4K133	MS16442-3	———	———	220 ± 5%	26	.790	5.2	5.70	325
-4	LT4K134	MS16442-4	LT7K050	MS16442-3	250 ± 5%	34	.790	4.8	4.21	320
-5	LT4K135	MS16442-5	———	———	270 ± 5%	25	.790	4.7	6.40	310
-6	LT4K136	MS16442-6	LT7K051	MS16442-	[illegible]	34	.790	4.5	6.23	300
-7	LT4K137	MS16442-7	———	———	[illegible]	24	.790	4.3	7.00	295
-8	LT4K138	MS16442-8	LT7K052	MS16	[illegible]	24	.790	4.1	7.40	285
-9	LT4K139	MS16442-9	———		[illegible] ± 5%	24	.790	3.9	7.80	280
-10	LT4K140	MS16442-10	LT7K053		[illegible] ± 5%	23	.790	3.7	8.20	270
-11	LT4K141	MS16442-11	———		[illegible] ± 5%	23	.790	3.6	8.60	265
-12	LT4K142	MS16442-12	———		560 ± 5%	23	.790	3.3	9.40	255
-13	LT4K143	MS16442-13	LT7K05		620 ± 5%	22	.790	3.2	10.00	245
-14	LT4K144	MS16442-14	———		680 ± 5%	22	.790	3.0	10.60	240
-15	LT4K145	MS16442-15	LT7		750 ± 5%	22	.790	2.9	11.20	235
-16	LT4K146	MS16442-16			820 ± 5%	21	.790	2.8	11.70	230
-17	LT4K147	MS16442-17			910 ± 5%	21	.790	2.6	12.20	225
-18	LT4K148	MS16442-18			1,000 ± 5%	21	.790	2.5	13.00	215

1/ The dash number added to the MS standard number constitutes the MS part number; for example MS18118-1.

2/ For the overload [illegible] shall be dc and 1-1/2 times the rated dc current.

CANCEL AFTER 25 AUG 72
NO SUPERCEDING DOCUMENT

ELECTRICAL CHARACTERISTICS (FINAL)

Inspection group	Allowable variation from initial measurement: Inductance	Q	Self-resonant frequency	DC resistance
	Percent	Percent	Percent	Percent
Qualification inspection:				
Group II	2	20	2	2
Group III	2	10	2	2
Acceptance inspection:				
Group B	2	10	2	2
Group C	2	10	2	2

NOTES:
1. THE BAROMETRIC-PRESSURE TEST (TEST-CONDITION LETTER C) IS APPLICABLE.
2. INITIAL INSULATION-RESISTANCE TEST, AND INSULATION-RESISTANCE MEASUREMENTS FOLLOWING OTHER TESTS, ARE APPLICABLE.
3. THE TEMPERATURE-RISE, TERMINAL-TWIST, AND SHOCK (METHOD I, CONDITION C, 50G) TESTS ARE APPLICABLE.
4. THE POLARIZING VOLTAGE DURING THE MOISTURE-RESISTANCE TEST IS APPLIED WITH THE POSITIVE LEAD CONNECTED TO THE COIL TERMINALS TIED TOGETHER, AND THE NEGATIVE LEAD CONNECTED TO THE METAL STRAP.
5. REFERENCED DOCUMENT SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENT REFERENCED HEREIN.
7. VIBRATION-TEST II, TEST CONDITION B, IS APPLICABLE, IN ADDITION UNITS SHALL BE RIGIDLY MOUNTED BY THE BODY.

This standard has been approved by the Department of the [illegible] and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 20 Jan 1964 REVISED (A) 25 Aug 1972

P.A. MI Other Cust EL ASD	TITLE COILS, RADIOFREQUENCY, METAL ENCASED, TYPES LT4K131 TO LT4K148, INCL.	MILITARY STANDARD MS18118	
PROCUREMENT SPECIFICATION MIL-C-15305	SUPERSEDES: MS16442	SHEET 1 OF 1	

5950-0434-2

☆ U. S. GOVERNMENT PRINTING OFFICE: 1972-714-537/1281

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.