FED. SUP CLASS
5935

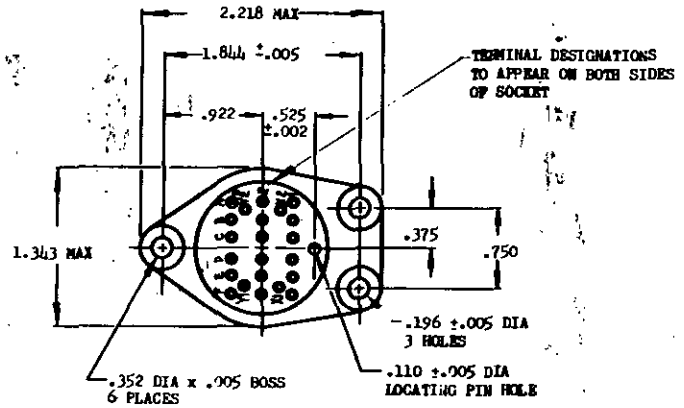



BOTTOM MOUNTED

USE WASHERS SUPPLIED WITH MS25332-1 TO ACCOMPLISH THE INDICATED SPACING

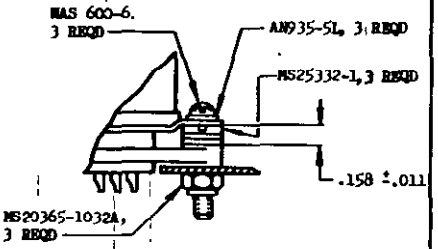

TOP MOUNTED

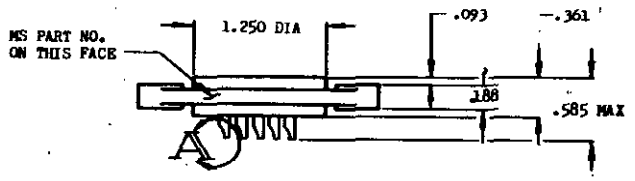

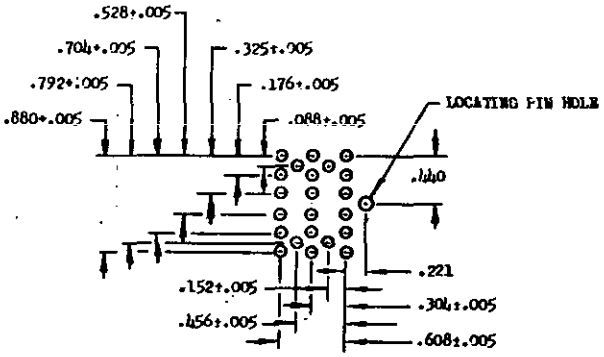

PIN RECEPTACLE LAYOUT

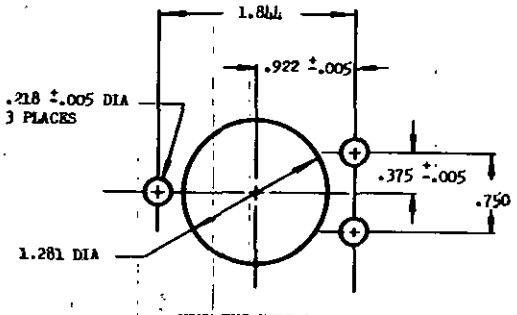

MOUNTING HOLE LAYOUT



DASH NO.	MAX WT LB WITHOUT HARDWARE
-1	.06

(A)	INSERTION AND WITHDRAWAL FORCES MEASURED WITH: .0390 +.0001 -.0000 DIA PIN	1 OZ MIN
(B)	VIBRATION, MIL-STD-202, METHOD 204, CONDITION B, WITH MS25463 INSERTED	10 G, 10 TO 1500 CPS
(C)	CONTACT TABS, PARA 3.8, MIL-S-12883	NOT APPLICABLE
(D)	AMBIENT TEMPERATURE RANGE	-65°C TO +120°C
(E)	PIN ENTRY	PARA. 3.3.1.2, MIL-C-5015
(F)	DIELECTRIC, MIN, WITHOUT MATING RELAY ENGAGED: SEA LEVEL	2500 VRMS
	ALTITUDE (80,000 FT)	500 VRMS
(G)	MATING RELAY	MS25463

MATERIAL: BODY, MIL-M-19833, TYPE GDI-30F.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS ±.010.

(8) CANCELLED AFTER 19 JUNE 1981. NO SUPERSEDING STANDARD.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. Navy - Wep Other Cust USAF - SGEE	TITLE SOCKET, RELAY, ELECTRICAL, 22 CONTACTS, 5 AMP	MILITARY STANDARD MS25464(ASG)
PROCUREMENT SPECIFICATION MIL-S-12883	SUPERSEDES:	SHEET 1 OF 1

APPROVED 1 Nov 60 REVISED (A) 1 Mar 63 (B) 19 June 1981

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the "Bureaus" (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981 0 — 703-023/5158

Source: https://assist.dla.mil -- Downloaded: 202640-23T15:10Z
Check the source to verify that this is the current version before use.