


This standard has been approved by the Department of the **USAF** and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

Downloaded from http://assist.dla.mil - Downloaded: 2020-01-23T15:22Z
Check the source to verify that this is the current version before use.

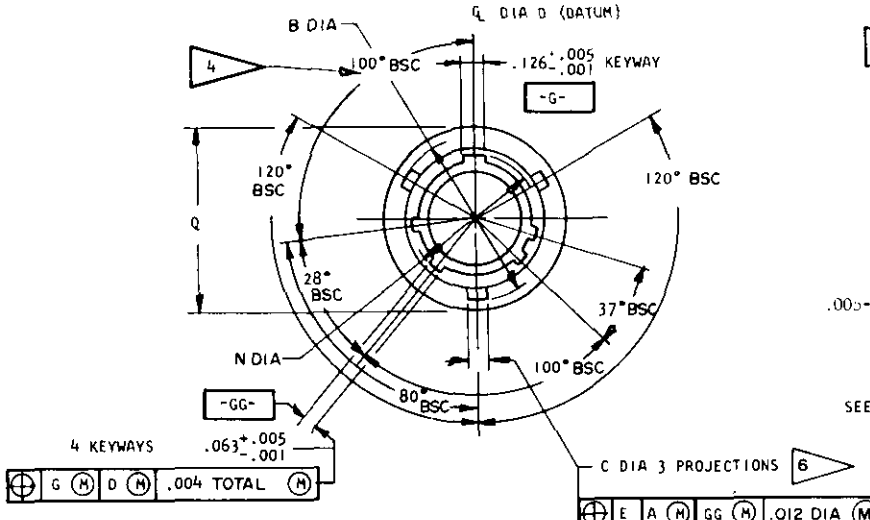

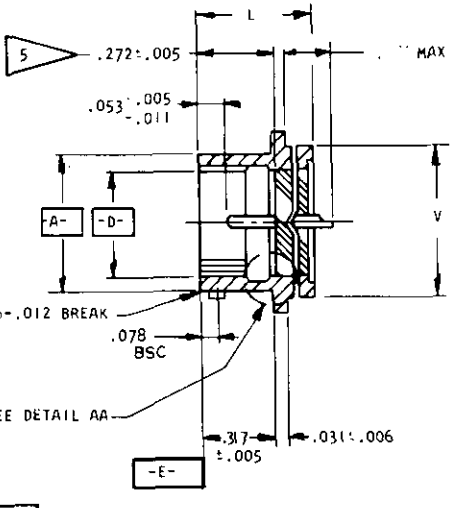



DETAIL AA

CLASS H STYLE P

SHELL SIZE	A +.001 -.005 DIA	B +.000 -.016 DIA OVER PROJ	C +.006 -.002 DIA	D +.005 -.001 DIA	L MAX	N +.005 -.006 DIA	Q +.011 -.010 DIA	V +.001 -.005 DIA	CC	ZZ MIN DIA	FOR INSERT ARR. SEE DWG MS
8	.473	.563	.078	.362	.469	.412	.687	.562	.004	.403	27343
10	.590	.680		.490		.540	.797	.672	.010	.515	27344
12	.750	.859		.607		.689	.906	.781		.629	27345
14	.875	.984		.732		.814	1.031	.906		.754	27346
16	1.000	1.108		.857		.939	1.156	1.031		.879	27347
18	1.125	1.233		.962		1.039	1.281	1.156		.980	27348
20	1.250	1.358	.125	1.087		1.164	1.375	1.250		1.105	27349
22	1.375	1.483		1.212	.500	1.289	1.500	1.375		1.230	27350
24	1.500	1.610		1.337		1.414	1.625	1.500		1.355	27351

NOTES:
1. DIMENSIONS IN INCHES.
2. DIAMETERS A AND D SHALL BE CONCENTRIC WITHIN .015 T.I.R.
3. DIAMETER A WITH RESPECT TO DIAMETER B, AND DIAMETER D WITH RESPECT TO DIAMETER N, SHALL BE CONCENTRIC AT MMC.
4. NORMAL KEYWAY POSITION. FOR OTHER KEYWAY POSITIONS SEE TABLE A, FIGURE 2 OF PROCUREMENT SPECIFICATION.
5. DISTANCE TO BOTTOM OF GASKET GROOVE AND ALSO TO FACE OF VITREOUS INSERT.
6. THE GAGE FEATURES FOR GG SHALL BE CC SMALLER THAN THEIR MMC SIZE AT BASIC LOCATION.

EXAMPLE OF PART NUMBER
MS27341 H 24 A 61 P A

MS NO. | CLASS | SHELL SIZE | FINISH (COLOR) | INSERT ARR. NUMBER | STYLE (P OR S) | POLARIZATION NO LETTER REQUIRED FOR NORMAL

Ⓓ CANCELED AFTER 15 DEC 1980. FOR SIMILAR CONNECTOR USE MS27478.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 26 JAN 66 REVISED (A) 11 AUG 66 (B) 1 FEB 67 (C) 20 DEC 67 (D) 15 DEC 80

FED. SUP CLASS 5935

P.A. Other Cust 15

PROCUREMENT SPECIFICATION MIL-C-27599 (USAF)

SUPERSEDES:

TITLE: CONNECTOR, RECEPTACLE, ELECTRIC, SOLDER TYPE, SOLDER MOUNTING, HERMETIC SEAL, PIN, BAYONET COUPLING

SHEET 1 OF 1

MILITARY STANDARD

MS 27341

DD FORM 1 SEP 67 6672-1 (Limited use authorized)

☆U.S. GOVERNMENT PRINTING OFFICE — 1981: 703-023/841