INCH-POUND

MS27622A
29 September 2000
SUPERSEDING
MS27622
17 March 1971

DETAIL SPECIFICATION SHEET

SOCKET, HOSE COUPLING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83296.

REQUIREMENTS:

1. Sockets shall be in accordance with figure 1 and table I.

2. Material shall be a corrosion resistant steel, class 304, condition B, as specified in SAE AMS-QQ-S-763. Sizes -4, -6, and -8 shall have a minimum yield of 70,000 psi and size -10 shall have a minimum yield of 60,000 psi.

3. Finish shall be passivated as specified in MIL-DTL-83296.

4. Radius or break all corners to .005 +.005/-.000, unless otherwise specified.

5. All burrs and slivers shall be removed.

6. Surface roughness, as specified in ASME B46.1, shall not exceed 125 µin R_a.

7. All tolerances shall be ±.005, unless otherwise specified.

8. The part number and manufacturer's part number shall be marked in accordance with MIL-DTL-83296.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.

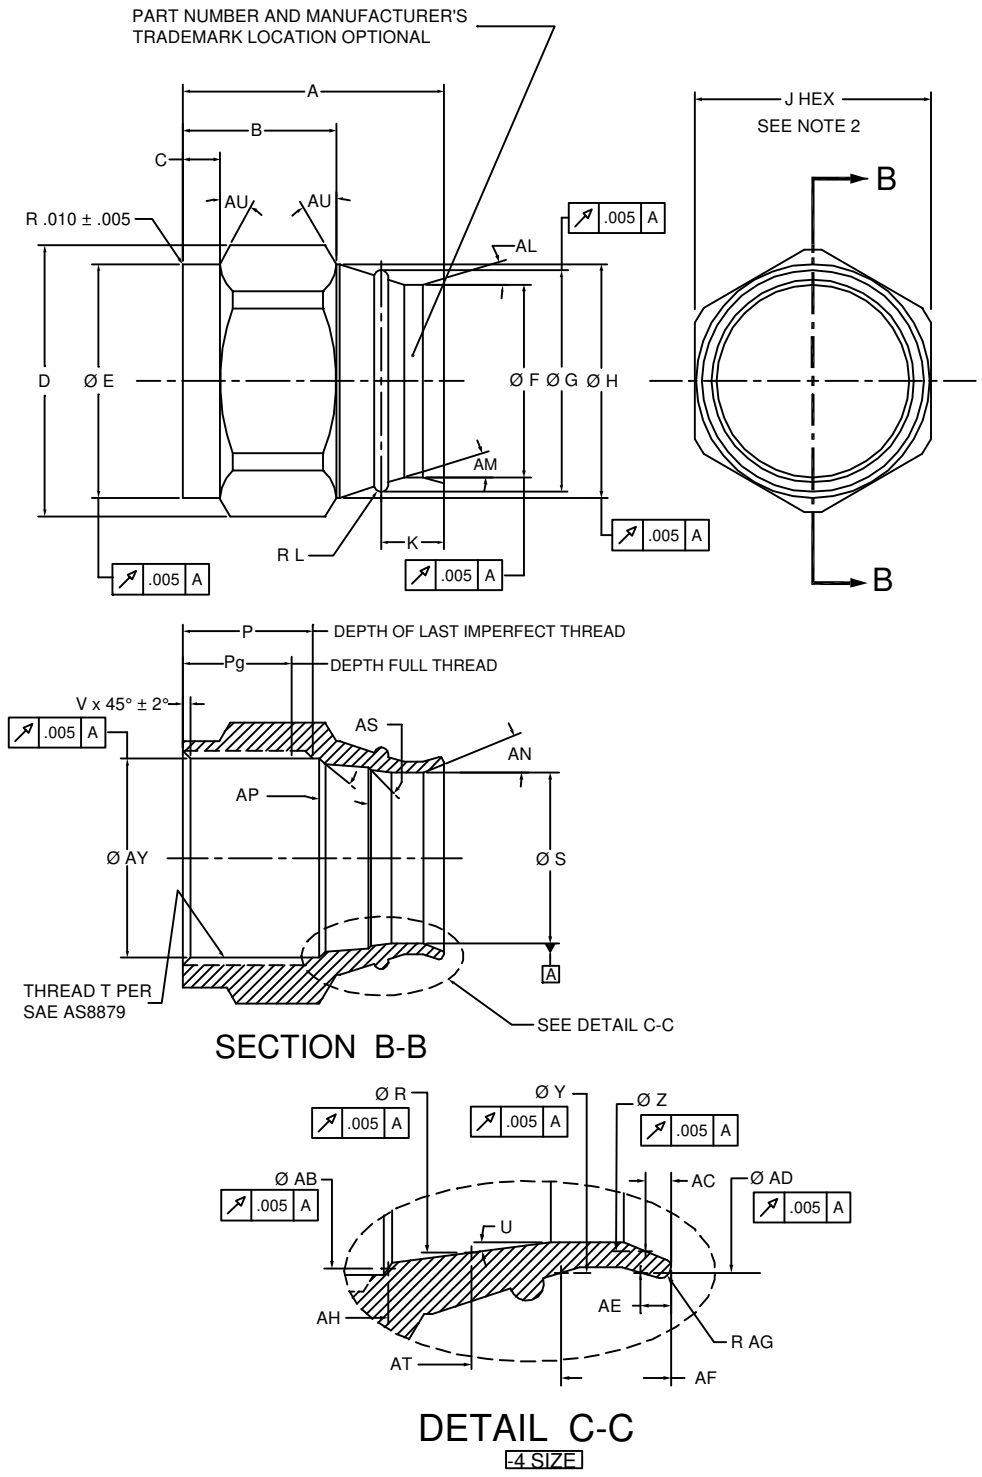

FIGURE 1. Socket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.

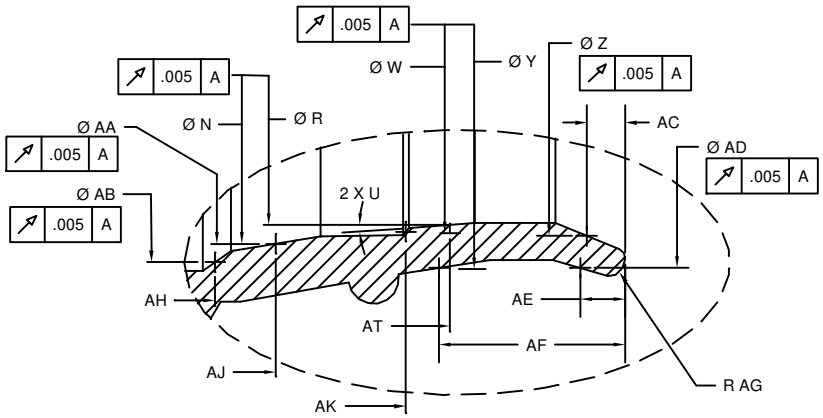

DETAIL C-C

-6 SIZE

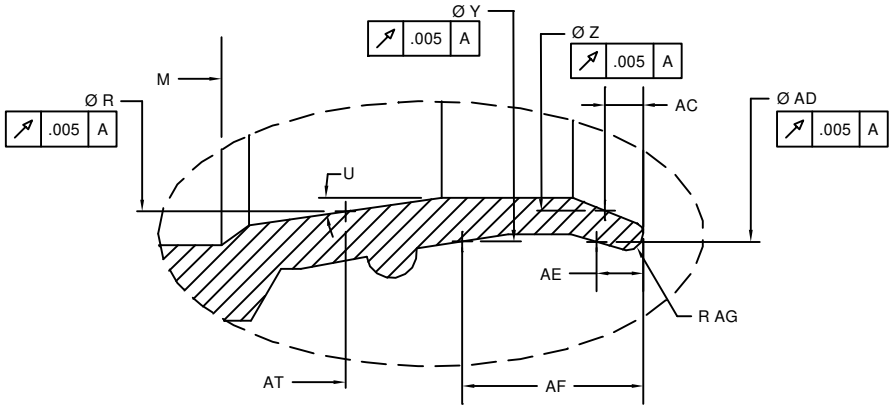

DETAIL C-C

-8 SIZE

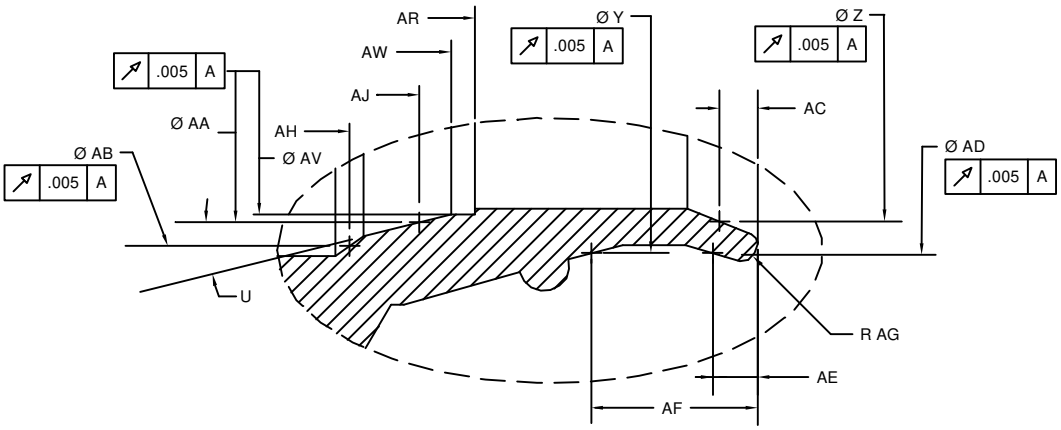

DETAIL C-C

-10 SIZE

FIGURE 2. Enlarged view of socket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.

TABLE I. Socket dimensions.

Part number	A ±.010	B ±.005	C ±.005	D ±.005	E ±.005	F ±.005	G ±.005
MS27622-4C	1.025	.485	.155	.825	.750	.580	.750
MS27622-6C	1.017	.420	.140	.962	.870	.690	.870
MS27622-8C	1.230	.565	.265	1.100	.995	.870	.995
MS27622-10C	1.271	.530	.155	1.375	1.243	1.032	1.243

TABLE I. Socket dimensions - Continued.

Part number	H ±.005	J	K ±.005	L ±.005	M ±.005	N ±.005	P Max
MS27622-4C	.750	.750	.386	.030	-	-	.395
MS27622-6C	.870	.875	.402		-	.635	
MS27622-8C	.995	1.000	.436	.050	.436	-	.400
MS27622-10C	1.243	1.250	.446		-	-	

TABLE I. Socket dimensions - Continued.

Part number	P_g Min	R Basic	S +.005 -.000	Thread T	Pitch diameter
MS27622-4C	.310	.5068	.485	5/8-18UNJF-3B	.5934/.5889
MS27622-6C	.295	.6030	.585	3/4-16UNJF-3B	.7143/.7094
MS27622-8C	.335	.7868	.755	7/8-24UNJS-3B	.8519/.8479
MS27622-10C	.295	-	.894	1 1/16-20UNJ-3B	1.0344/1.0300

TABLE I. Socket dimensions - Continued.

Part number	U		V ±.015	W Basic	Y ±.005	Z Basic	AA Basic	AB Basic
MS27622-4C	4º	±.25º	.031	-	.632	.5388	-	.5488
MS27622-6C	6º			.6232	.723	.6362	.6448	.6718
MS27622-8C	7º		.030	-	.892	.7983	-	-
MS27622-10C		±.5º	.037	-	1.081	.9762	.9547	.9870

TABLE I. Socket dimensions - Continued.

Part number	AC ±.010	AD ±.005	AE Basic	AF Basic	AG ±.005	AH ±.005
MS27622-4C	.070	.632	.0721	.3308	.015	.410
MS27622-6C	.074	.723	.0861	.3013		.435
MS27622-8C	.071	.898	.0794	.3220		-
MS27622-10C	.056	1.081	.0424	.3387		.461

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.

TABLE I. Socket dimensions - Continued.

Part number	AJ ±.005	AK ±.005	AL ±2º	AM ±2º	AN ±2º	AP		AR ±.005
MS27622-4C	-	-	20º	17º	20º	30º	±.5º	-
MS27622-6C	.490	.642		16º		45º		-
MS27622-8C	-	-	10º	10º		60º		-
MS27622-10C	.524	-	30º	15º	40º	45º	±2º	.694

TABLE I. Socket dimensions - Continued.

Part number	AS ±.5º	AT ±.005	AU ±5º	AV +.005 -.000	AW ±.005	AY	
MS27622-4C	-	.555	15º	-	-	.565	+.008-.000
MS27622-6C	45º	.689		-	-	.682	+.009-.000
MS27622-8C	-	.580		-	-	.830	+.007-.000
MS27622-10C	-	-		.914	.578	1.008	+.008-.000

NOTES:

1. All dimensions are in inches unless otherwise specified.

2. For dimension J, use commercial stock size tolerance as specified in SAE AMS2241M.

3. This part is for use with MIL-DTL-83298 hose.

4. This specification sheet takes precedence over documents referenced herein.

5. Referenced documents shall be of the issue listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

6. Dimensioning and tolerancing are in accordance with ASME Y14.5M-1994.

7. Part or Identifying Number (PIN):

Example of a PIN: MS27622-4C.

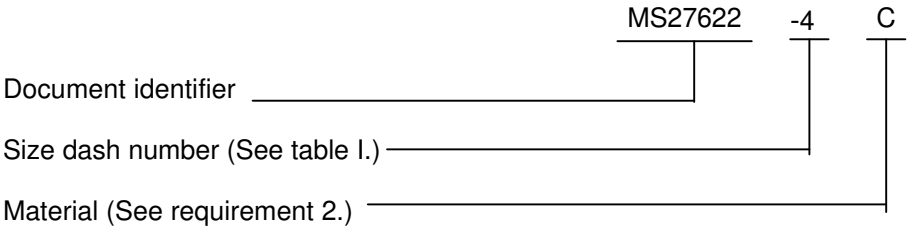

8. Next assemblies are MS27616 through MS27618 and MS27629 through MS27631.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.

Custodians:
Air Force - 99
Army - AV
Navy - AS
DLA - CC

Review activities:
Air Force - 82
Navy - MC, SA

Preparing activity:
DLA - CC

(Project 4730-1040-014)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.