

PROJ 5945-0289-3

FED. SUP CLASS
5945

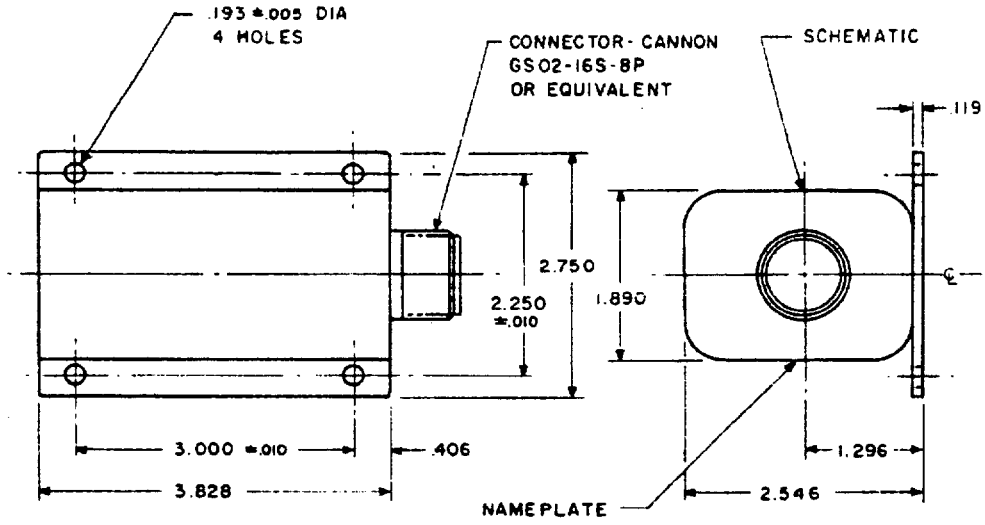

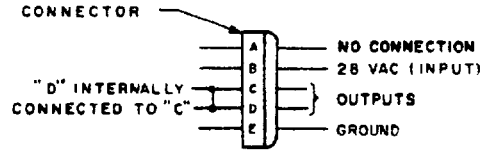

SCHEMATIC

REQUIREMENTS:

	INPUT VOLTAGE	28 VAC, 400 HERTZ
	OUTPUT (CONTACT RATING)	10 AMPS MAX LAMPLOAD AT 28 VAC, 400 HERTZ
(B)	FLASH RATE	85 ±10 FLASHES PER MINUTE
	LIFE	1000 HOURS
	WEIGHT	1.5 LBS MAX
(B)	PART NUMBER	MS 27711-001

1. ALL DIMENSIONS ARE IN INCHES
2. TOLERANCES UNLESS OTHERWISE SPECIFIED ± .032
3. THE FLASHER NEED NOT HAVE THE CONTOUR SHOWN, BUT SHALL BE CONTAINED WITHIN THE OUTLINE SHOWN
4. CASE - ENCLOSURE MAY BE COMPLETELY POTTED OR HERMETICALLY SEALED. IF THE ENCLOSURE IS HERMETICALLY SEALED IT SHALL BE TESTED IN ACCORDANCE WITH MIL-STD-202, METHOD 112, TEST CONDITION C, PROCEDURE IV, MAXIMUM TOTAL LEAKAGE RATE SHALL NOT EXCEED 1 MICRON CUBIC FOOT PER HOUR PER CUBIC INCH SEALED VOLUME AT A PRESSURE DIFFERENTIAL OF 1 ATMOSPHERE
5. FOR DESIGN PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENT REFERENCED HEREIN
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID

APPROVED 31 OCTOBER 1967 REVISED (A) 26 FEB 1968 (B) 1 OCT 1973

This standard has been approved by the AFLC (85) Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. AIR FORCE 85 Other Cust	TITLE FLASHER, AIRCRAFT NAVIGATIONAL LIGHT 28VAC, 400 HERTZ (B)	MILITARY STANDARD MS27711 (USAF)
PROCUREMENT SPECIFICATION MIL-F-26301	SUPERSEDES: AF DWG 63C47033	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

EDITION OF 1 SEP 57 MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:48Z
Check the source to verify that this is the current version before use.