
FED SUP CLASS
5930

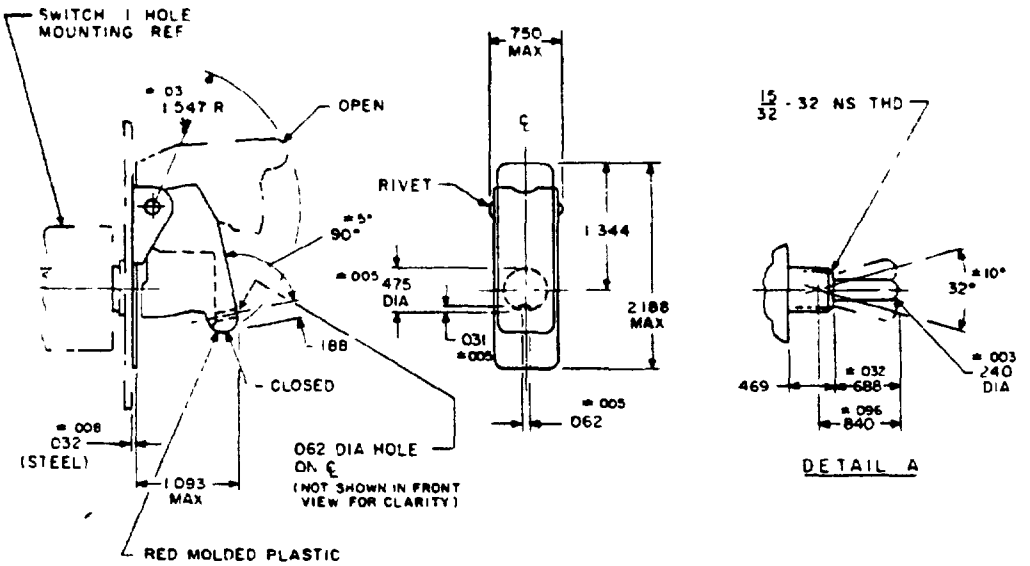

DASH NO	TYPE	PANEL THICKNESS (REF)	OPERATING FORCE
1	1 HOLE MOUNTING	.050 TO .248	10 TO 25 LBS

© INCHES	MM	INCHES	MM
.003	.08	.248	6.30
.005	.13	.469	11.91
.008	.20	.475	12.06
.016	.41	.688	17.47
.031	.79	.750	19.05
.032	.81	.840	21.34
.050	1.27	1.093	27.76
.062	1.57	1.344	34.14
.096	2.44	1.547	39.29
.188	4.77	2.188	55.57
.240	6.10		

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.016 on decimals.
3. Material Plastic, molded, red color shade 11136, Federal Standard 595. Steel, commercial, shall be smooth and free from burrs.
© 4. Finish Zinc plate, QQ-Z-325, type III, or cadmium plate, QQ-P-416, type III, with optional supplementary treatment per MIL-C-8514 or DOD-P-15328, black enamel, lusterless, color number 37038 or semigloss, color number 27038, Federal Standard 595 or equivalent.
5. Guard shall remain in either open or closed position. Opening or closing of guard shall not change position of switch contacts.
6. Suitable for use with switches having toggle characteristics in accordance with detail A (1-hole mounting).
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.

© denotes changes

P A AF-85	International interest	TITLE GUARD, SWITCH, 3 POSITION	MILITARY STANDARD
Other Cust ARMY-ER NAVY-AS			MS27752
Procurement Specification MIL-G-7703		SUPERSEDES	PAGE 1 OF 1

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5930-1226-9

APPROVED 31 JAN 1972 REVISED (A) 01 SEP 1978 (B) 30 Sep 81 (C) 20 DEC 82

This military standard is approved for use by AFALD/PTS, Department of the AIR FORCE, and is available for use by all Departments and Agencies of the Department of Defense
Code 85,
User activities
Review activities 99
LIC GOVERNMENT PRINTING OFFICE: 1983 - 605-034/465
Source: http://assist.daps.dla.mil - 2026-04-23T16:50Z
Check the source to verify that this is the current version before use.