

FED. SUP CLASS
166C

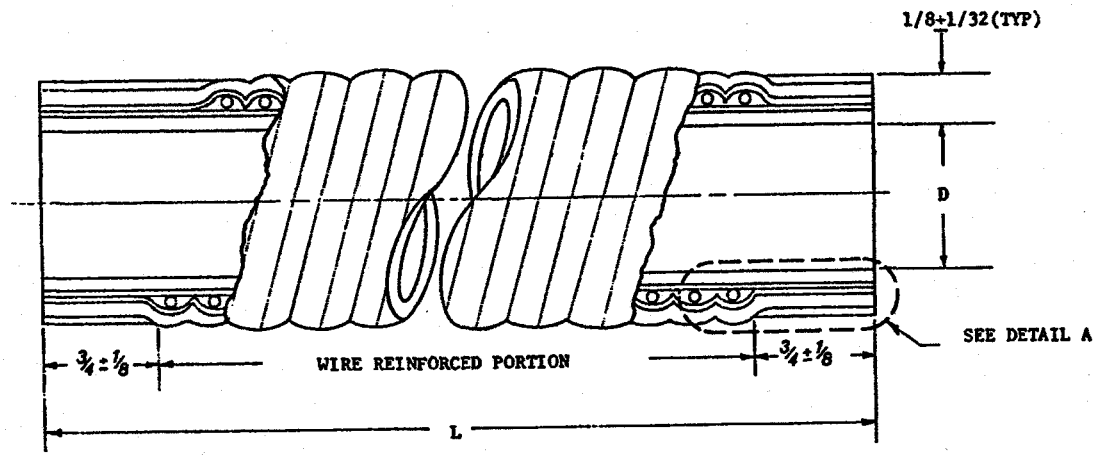

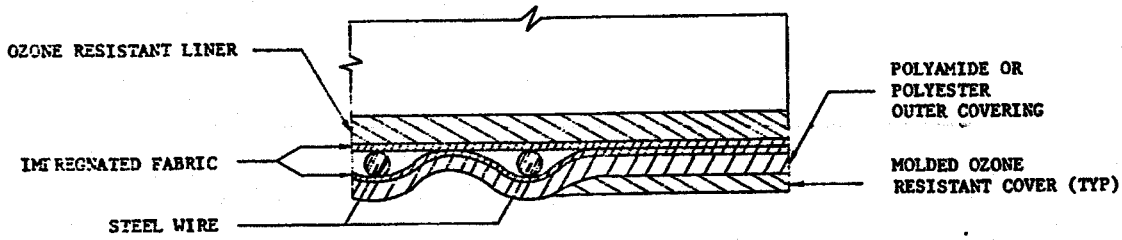

DETAIL A

MS PART NUMBER	D±1/32	$L^{+5\%}_{-0}$
MS27797-6-52	3/8	5.2
-6-60	3/8	6.0
-6-140	3/8	14.0
-6-214	3/8	21.4
-10-080	5/8	8.0
-10-120	5/8	12.0
-10-180	5/8	18.0
-10-200	5/8	20.0
-10-240	5/8	24.0

(A)

NOTES:
FIRST DASH IN MS NUMBER IS INSIDE DIAMETER IN SIXTEENTHS OF INCH
SECOND DASH IN MS NUMBER IS LENGTH IN TENTHS OF INCHES
HOSE MUST BE CLEAN, DRY, AND FREE FROM OIL, GREASE, AND OTHER FOREIGN MATERIAL
DIMENSIONS ARE IN INCHES
TOLERANCES ARE AS SPECIFIED

REVIEW ACTIVITY: AF—11, 82

APPROVED 15 DEC 1969 REVISED (A) 15 AUG 83

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. AF-71 Other Cust AF -99	TITLE HOSE, OXYGEN AND PRESSURIZATION, OZONE RESISTANT	MILITARY STANDARD MS 27797 (USAF)
PROCUREMENT SPECIFICATION MIL-H-26385	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 83 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:52
Check the source to verify that this is the current version before use.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1983 — 606-034/4177