
FED. STOCK CLASS. 1560

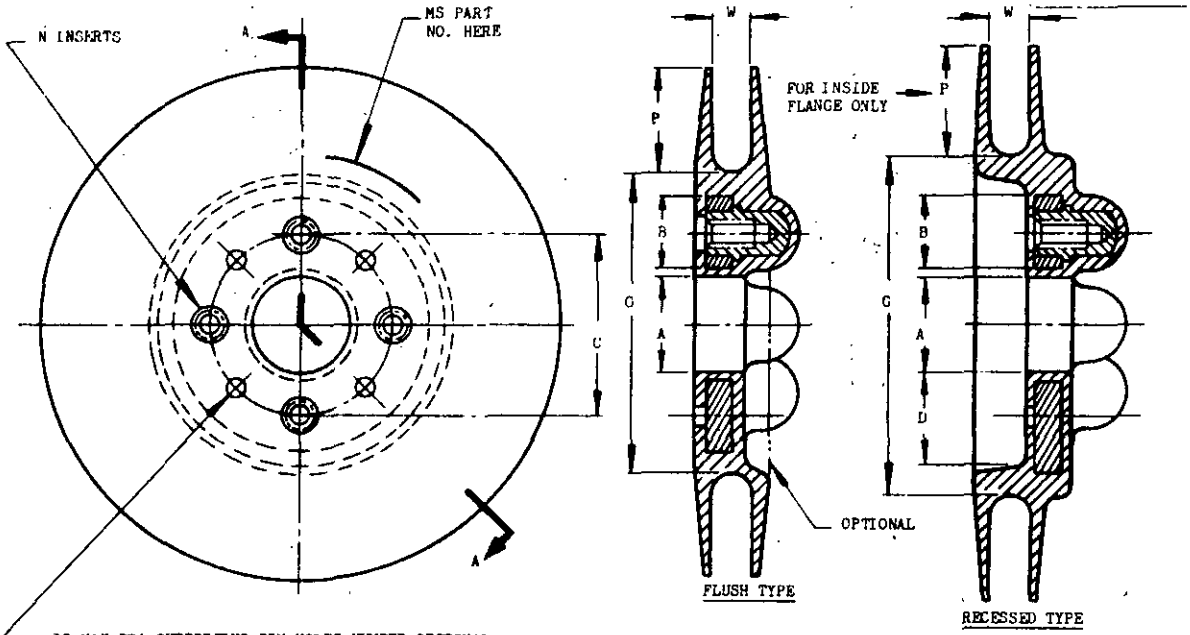

.19 MAX DIA SUPPORTING PIN HOLES. NUMBER OPTIONAL. NOT TO BE USED ON SIDE EXPOSED TO LIQUID.

SECTION A-A

DASH NUMBER TYPE I SELF-SEALING STEEL AND OIL TANKS	DASH NUMBER TYPE II SELF-SEALING OIL TANKS	A +.00 -.06 DIA	B MIN	C DIA	D	G DIA	N	P MIN
-1, A1, B1	-41, A41, B41	.88	.62	1.625	—	2.69	4	1.00
-21, A21, B21	-61, A61, B61				.81	3.06		
-2, A2, B2	-42, A42, B42	1.25		2.000	—		6	
-22, A22, B22	-62, A62, B62				.81	3.44		
-3, A3, B3	-43, A43, B43	1.62		2.375	—			
-23, A23, B23	-63, A63, B63				.81	3.81		
-4, A4, B4	-44, A44, B44	2.00		2.750	—		8	
-24, A24, B24	-64, A64, B64				.81	4.19		
-5, A5, B5	-45, A45, B45	2.38		3.125	—		10	
-25, A25, B25	-65, A65, B65				.81	4.56		
-6, A6, B6	-46, A46, B46	2.75		3.500	—		8	
-26, A26, B26	-66, A66, B66				.81	4.94		
-7, A7, B7	-47, A47, B47	3.88	.75	4.750	—	5.94	12	1.25
-27, A27, B27	-67, A67, B67				.94	6.31		
-8, A8, B8	-48, A48, B48	4.25		5.125	—		16	
-28, A28, B28	-68, A68, B68				.94	6.69		
-9, A9, B9	-49, A49, B49	5.12		6.000	—	7.19		
-29, A29, B29	-69, A69, B69				.94	7.56		
-10, A10, B10	-50, A50, B50	6.38		7.250	—	8.44		
-30, A30, B30	-70, A70, B70				.94	8.81		
-11, A11, B11	-51, A51, B51	7.00		7.870	—	9.56	18	1.50
-31, A31, B31	-71, A71, B71				1.06			
-12, A12, B12	-52, A52, B52	8.25		9.120	—	10.81	20	
-32, A32, B32	-72, A72, B72				1.06			
-13, A13, B13	-53, A53, B53	3.12		4.000	—	5.19	12	1.25
-33, A33, B33	-73, A73, B73				.94	5.56		

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS ±.03, THREE-PLACE DECIMALS ±.010.
INSERTS SHALL BE LOCATED WITHIN .010 OF BASIC POSITION.
FLANGE DESIGN IN ACCORDANCE WITH MS33596.
FLANGE SYMMETRICAL ABOUT CENTERLINES.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

7 AUG 1980
© CANCELLED after NO SUPERSEDING STANDARD

APPROVED 24 Feb 58 REVISED (A) 27 May 59 (B) 30 AUG 74 (C) 7 AUG

P.A. USAF Other Cust Army - TC Navy - Aer	TITLE FLANGE, ATTACHMENT, MOLDED TANK, FLUSH AND RECESSED, FULL MOLDED, CIRCULAR	MILITARY STANDARD MS29576
PROCUREMENT SPECIFICATION MIL-P-5577	SUPERSEDES: AN4130	SHEET 1 OF 2

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1980-0-287-173

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil - Downloaded: 2026-01-28T17:03Z
Check the source to verify that this is the current version before use.