
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS 6115

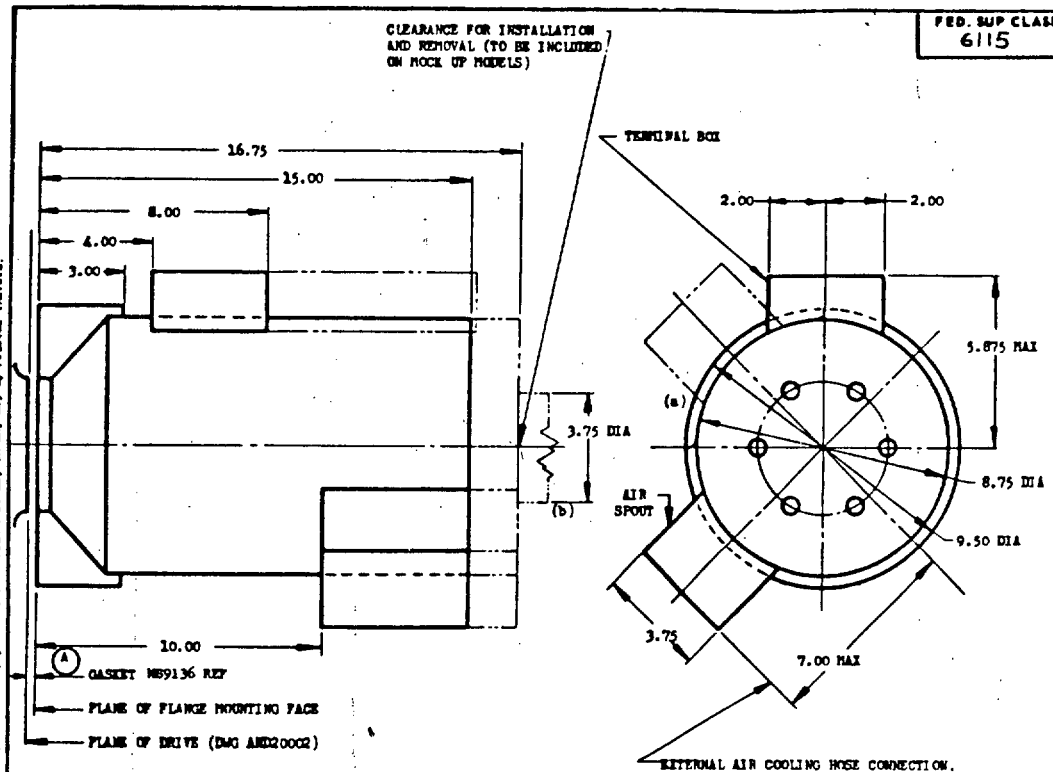

EXTERNAL AIR COOLING HOSE CONNECTION. GENERATOR MAY BE MOUNTED ON DRIVE IN ANY ONE OF SIX POSITIONS AS CONTROLLED BY FLANGE MOUNTING HOLES. AIR SPOUT MAY BE ADJUSTED AT INSTALLATION TO ANY ONE OF 12 POSITIONS RADIALLY AROUND GENERATOR AXIS IN 30° INCREMENTS BEGINNING AT 45° FROM AXIS OF ELECTRICAL TERMINAL BOX

(a) EXHAUST COOLING SHROUD MAY BE REDUCED FROM 9.50 MAX DIA TO 8.75 DIA FOR 90° OF CIRCUMFERENCE FOR UNIQUE INSTALLATIONS.

(b) AXIAL ENTRY COOLING CAP CLEARANCE SHALL BE PROVIDED FOR 3.00 DIA INLET TUBE.

REFERENCE SPECIFICATION MIL-G-6162.

PROVIDE ACCESSORY CLEARANCE AROUND ACCESSORY MOUNTING FLANGE IN ACCORDANCE WITH DRAWING AED10262.

CLEARANCE SHALL BE PROVIDED TO PERMIT INSTALLATION OF GENERATOR IN AT LEAST ONE OF SIX POSSIBLE POSITIONS

CLEARANCE SHALL BE PROVIDED FOR ELECTRICAL CONNECTIONS TO TERMINAL BOX AND FOR 3.00 ID AN HOSE OR EQUIVALENT, TO AIR SPOUT.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE MINIMUM CLEARANCE.

APPROVED 8 May 53 REVISED (A) 21 Jul 71 (B) 18 Dec 87

Ⓑ CANCELED AS OF 18 DECEMBER 1987.

THIS IS A DESIGN STANDARD. NOT USED AS A PART NUMBER.

P.A. USAF - 11 Other Cust Navy - AS	MILITARY STANDARD INSTALLATION CLEARANCE - TYPE XII DRIVE, (GENERATOR-WIDE SPEED RANGE)	MS33539
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1
1 OCT 52

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971 - 714-157/1232

Project 6115-0258

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:04Z
Check the source to verify that this is the current version before use.