
FED SUP CLASS
6620

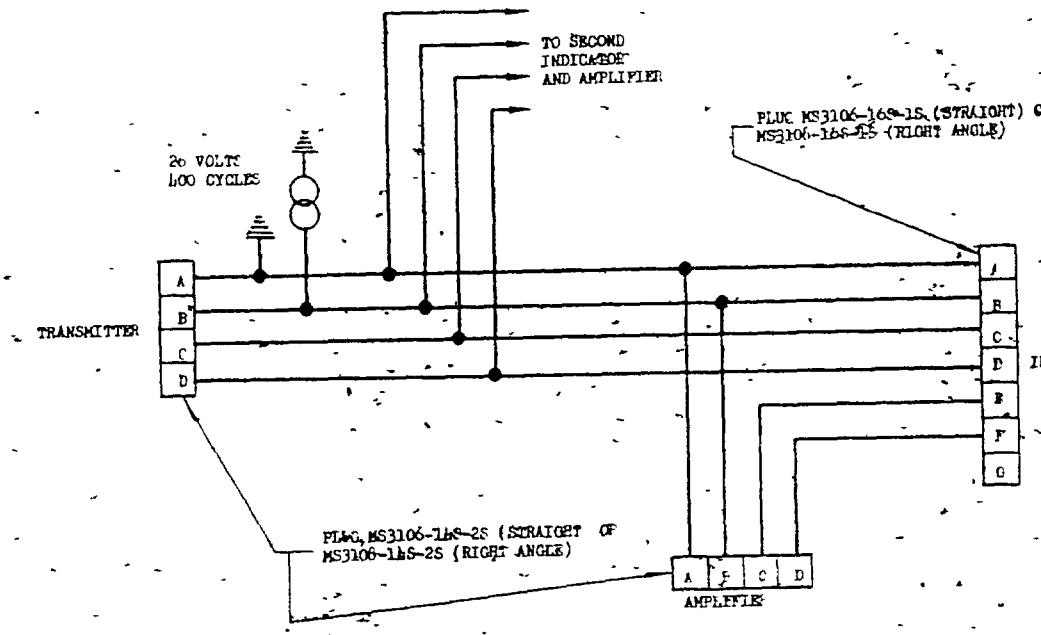

WHEN TWO INDICATORS ARE TO BE OPERATED BY ONE TRANSMITTER, THE SECOND INDICATOR AND AMPLIFIER SHALL BE CONNECTED IN PARALLEL WITH THE FIRST AS SHOWN.

GROUND CIRCUIT SHALL NOT BE USED BETWEEN TRANSMITTER AND INDICATOR(S) OR AMPLIFIER(S)

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

NOTICE — When Government drawings specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto

This standard has been approved by the Bureaus (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are accepted to employ this standard where suitable

P.A. Navy - Wep Other Cust USAF	TITLE WIRING DIAGRAM - SENSITIVE INSTRUMENT SYSTEM WITH SEPARATE AMPLIFIER, 26 VOLTS, 400 CYCLES, SCHEMATIC	MILITARY STANDARD MS33741 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES... AN810483	SHEET 1 OF 1

APPROVED 8 Jun 49 REVISED

DD FORM 672-1 (Limited Coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:07Z
Check the source to verify that this is the current version before use.