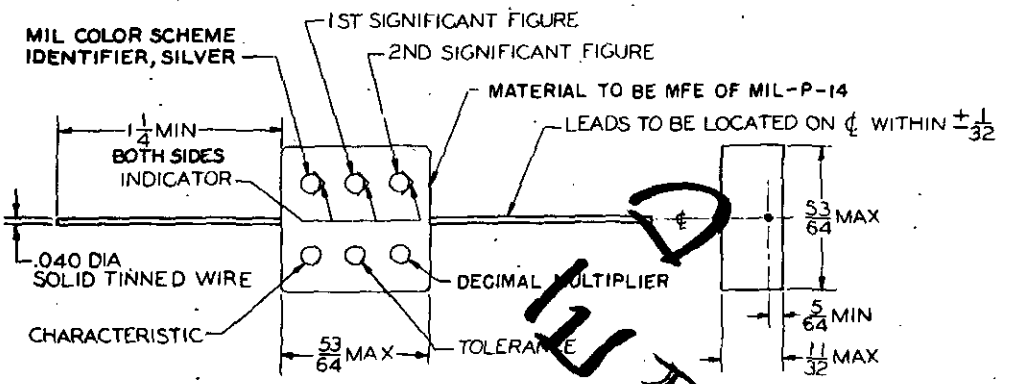


TYPE DESIGNATION TO BE IN THE FOLLOWING FORM

CN 35 A 302 K

COMPONENT CASE | CHARACTERISTIC | CAPACITANCE | TOLERANCE

CANCELLED 25 Nov 1964 USE MIL-C-91

CHARACTERISTIC	PERMISSABLE DIRECT VOLTAGE FOR THE AMBIENT TEMPERATURES SHOWN IN PERCENT OF DIRECT-VOLTAGE RATING AT 40°C							
	-55°C	-20°C	0°C	45°C	55°C	65°C	75°C	85°C
A	100	100	100	100	100	100	100	95
E	100	100	100	100	95	90	80	70

(A)

DASH NO.	TYPE DESIGNATION	CAP. UUF	VDCW	MAX RF CUR 1 TO 10 MC RMS AMPS	CAPACITANCE TOL	CHARACTERISTICS	COLOR CODE					
							UPPER DOTS			LOWER DOTS		
							LEFT	CENTER	RIGHT	LEFT	CENTER	RIGHT
1	CN35A302K	3000	800	.21	±10%	A	SILVER	ORANGE	BLACK	BLACK	SILVER	RED
2	CN35A602K	6000	600	.30	±10%	A	SILVER	BLUE	BLACK	BLACK	SILVER	RED
3	CN35A103K	10000	600	.39	±10%	A	SILVER	BROWN	BLACK	BLACK	SILVER	ORANGE
4	CN35E203K	20000	300	.55	±10%	E	SILVER	RED	BLACK	BROWN	SILVER	ORANGE

NOTES:

1. TABLE I, AND FIGURES 3 THRU 10 INCLUSIVE SHALL BE DELETED FROM SPECIFICATION JAN-C-91.

ALL DIMENSIONS IN INCHES

APPROVED 24 JULY, 1951 REVISED (A) 16 FEB, 1953 (B) 11 August 1955 C 25 November 1964

CUSTODIAN	MILITARY STANDARD	MS 35027 (SIG C)
SIGNAL CORPS	CAPACITORS, PAPER-DIELECTRIC, FIXED	
PROCUREMENT SPECIFICATION JAN-C-91		SHEET 1 OF 1

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MS FORM 1 NOV 60 233

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:08Z
Check the source to verify that this is the current version before use.