
FSC SUPC AREA
3020

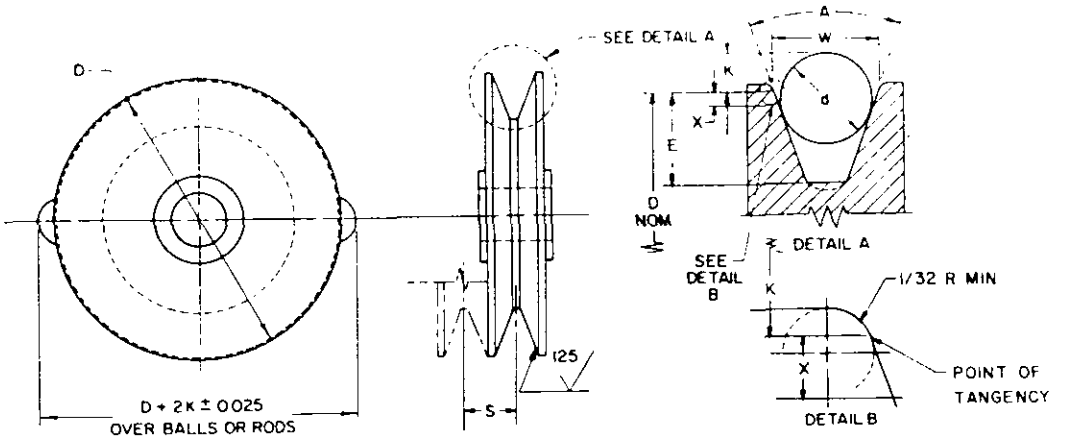

NOMINAL SIZE FOR BELTS AND PULLEYS INCH	b GROOVE WIDTH IN. ± 0.005	A GROOVE ANGLE ± 1/2°	E GROOVE DEPTH IN. MIN	K RUN-OUT INCH	d BALL OR ROD DIA INCH	D DIAMETER INCH ± 0.005	2X IN.	S GROOVE SPACING IN. ± 0.015
0.380	0.380	36	7/16	0.077	0.3125	2.75 AND LARGER	0.06	0.541
0.500	0.500	36	9/16	0.157	0.4375	3 AND LARGER	0.08	0.661
11/16	0.597	34	9/16	0.129	0.500	3 TO 4 INCL		
		36		0.140		4 TO 6 INCL	0.00	0.778
		38		0.151				
3/4	0.660	34	5/8	0.164		INCL		
		36				TO 6 INCL	0.02	0.841
		38						
7/8	0.785	34				5 INCL		
		36				TO 6 INCL	0.04	0.966
1	0.91[illegible]					8 INCL	0.06	1.091
						8		

Ⓓ CANCELED AFTER 21 APRIL 1982 FUTURE PROCUREMENT SHOULD BE MADE UNDER SAE J636B.

...E STANDARD V-BELTS AND PULLEYS.
...ROOVE WIDTHS "W", AND GROOVE DEPTHS "E" ARE MEASURED
... TANGENCY OR AT 1/2 THE DIAMETER "D" MEASURED FROM THE CENTER
...ER.

... RUN-OUT SHALL NOT EXCEED 0.015 IN., TOTAL INDICATOR READING. LATERAL RUN-OUT SHALL NOT EXCEED 0.015 IN., TOTAL INDICATOR READING. RUN-OUT IN THE TWO DIRECTIONS SHALL BE MEASURED SEPARATELY AS TOTAL INDICATOR READINGS OF MOVEMENT OF BALL MOUNTED UNDER SPRING PRESSURE TO FOLLOW GROOVE AS PULLEY IS ROTATED. DIAMETER, LOAD AND OVERHANG CONDITIONS MAY REQUIRE OR PERMIT VARIATIONS IN THE ABOVE SPECIFIED RUN-OUT LIMITS.

4. BOTTOM CORNER RADII OPTIONAL, BUT IF USED, THEY SHALL BE BELOW THE DEPTH, E.
5. IN PULLEYS FOR USE WITH BELTS IN MULTIPLE ON COMMON CENTERS, THE DIAMETERS OVER THE BALL GAGES SHALL NOT VARY FROM GROOVE TO GROOVE IN THE SAME PULLEY MORE THAN 0.002 IN. PER INCH OF DIAMETER, WITH TOP LIMIT OF 0.012 IN. FOR DIAMETER 6 IN. AND ABOVE.
6. CENTERLINE OF GROOVE SHALL BE 90 DEGREES PLUS OR MINUS 2 DEGREES WITH PULLEY AXIS.
7. THE S VALUES ARE INTENDED FOR ADJACENT GROOVES OF THE SAME NOMINAL WIDTH "W". CHOICE OF PULLEY MANUFACTURE OR BELT DESIGN PARAMETER MAY JUSTIFY VARIANCE FROM THESE VALUES. THE S DIMENSION SHALL BE THE SAME, ± 0.015 INCH ON ALL MULTIPLE GROOVE PULLEYS IN A DRIVE USING MATCHED BELTS.
8. 2X IS TO BE SUBTRACTED FROM THE DIAMETER "D" TO OBTAIN PITCH DIAMETER FOR SPEED RATIO CALCULATIONS.
9. FINISH SHALL BE IN ACCORDANCE WITH ANSI B46.1.
10. THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ABCA STD 63. WHEN AMENDMENT, REVISION, OR CANCELLATION IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

© ENTIRE STANDARD REVISED

APPROVED 19 MAY 1958 REVISED (A) 1 MAY 1963 (B) 16 APRIL 1968 (C) 14 MAY 75 (D) 21 APRIL 1982

REVIEW ACTIVITIES: AT, MI, MC, SH, YD, DL
USER ACTIVITIES:

THIS MILITARY STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATION AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. ME Other Cust AIR FORCE 82	INTERNATIONAL INTEREST ABCA	TITLE: PULLEY, GROOVE: ENGINE ACCESSORY DRIVE BELTS.	MILITARY STANDARD MS 51064
PROCUREMENT SPECIFICATIONS NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Reproduced)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:56Z
Check the source to verify that this is the current version before use.