
MS9462(ASG)

FED. SUP CLASS
5315

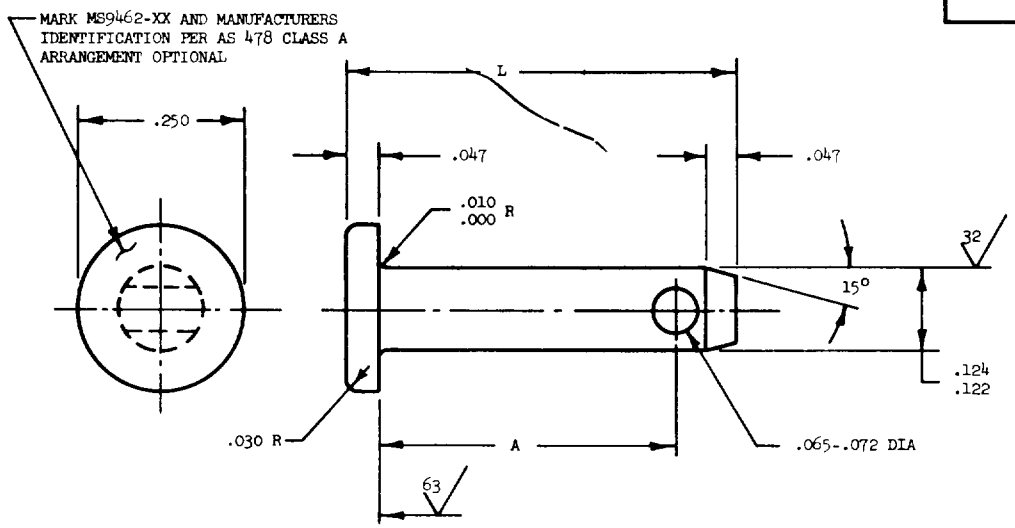

PART NUMBER	A	L	APPROX WEIGHT LB/100
MS9462-04	.253	.391	.18
MS9462-05	.315	.453	.20
MS9462-06	.378	.516	.22
MS9462-07	.440	.578	.24
MS9462-08	.503	.641	.26
MS9462-09	.565	.703	.28
MS9462-10	.628	.766	.30
MS9462-11	.690	.828	.32
MS9462-12	.753	.891	.34
MS9462-13	.815	.953	.36
MS9462-14	.878	1.016	.38
MS9462-15	.940	1.078	.40
MS9462-16	1.003	1.141	.42
MS9462-17	1.065	1.203	.44
MS9462-18	1.128	1.266	.46
MS9462-19	1.190	1.328	.48
MS9462-20	1.253	1.391	.50
MS9462-21	1.315	1.453	.52
MS9462-22	1.378	1.516	.54
MS9462-23	1.440	1.578	.56
MS9462-24	1.503	1.641	.58

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5735.
2. SURFACE ROUGHNESS: AS 291. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
3. PART SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
4. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
6. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 6 Nov 64 REVISED

Review and User Lists: USAF - 11 Navy - MP

This standard has been approved by the Department of the Air Force (11) and the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11	TITLE	MILITARY STANDARD
Other Cust Navy - MP	PIN, STRAIGHT, HEADED .124 DIAMETER, AMS 5735	MS9462 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:17Z
Check the source to verify that this is the current version before use.