
MS9464 (ASG)

FED SUP CLASS
5315

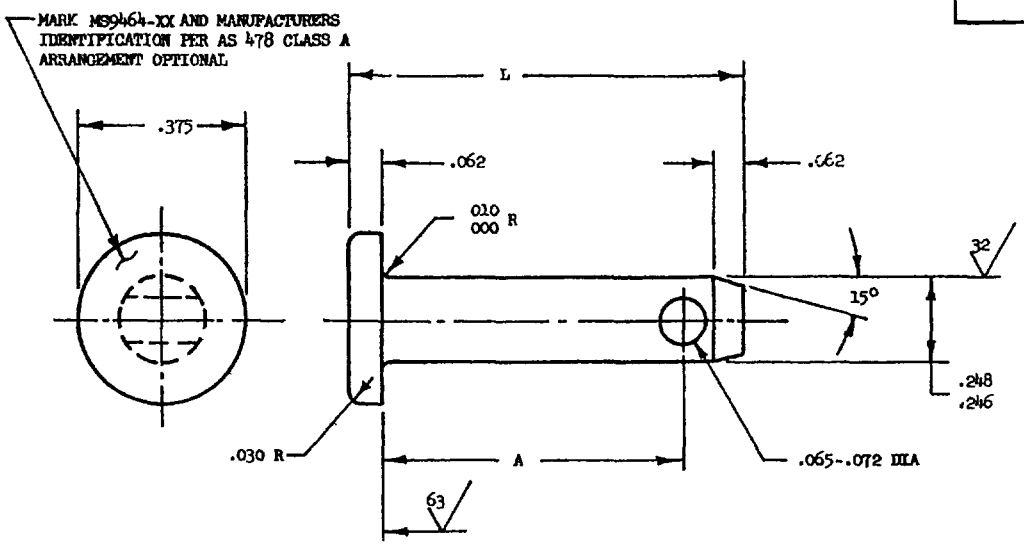

PART NUMBER	A	L	APPROX WEIGHT LB/100
MS9464-06	.378	.547	.86
MS9464-07	.440	.609	.94
MS9464-08	.503	.672	1.03
MS9464-09	.565	.734	1.12
MS9464-10	.628	.797	1.20
MS9464-11	.690	.859	1.29
MS9464-12	.753	.922	1.37
MS9464-13	.815	.984	1.46
MS9464-14	.878	1.047	1.54
MS9464-15	.940	1.109	1.63
MS9464-16	1.003	1.172	1.71
MS9464-17	1.065	1.234	1.80
MS9464-18	1.128	1.297	1.88
MS9464-19	1.190	1.359	1.97
MS9464-20	1.253	1.422	2.05
MS9464-21	1.315	1.484	2.14
MS9464-22	1.378	1.547	2.22
MS9464-23	1.440	1.609	2.31
MS9464-24	1.503	1.672	2.39
MS9464-25	1.565	1.734	2.48
MS9464-26	1.628	1.797	2.56
MS9464-27	1.690	1.859	2.65
MS9464-28	1.753	1.922	2.73
MS9464-29	1.815	1.984	2.82
MS9464-30	1.878	2.047	2.90
MS9464-31	1.940	2.109	2.99
MS9464-32	2.003	2.172	3.07

1 MATERIAL CORROSION AND HEAT RESISTANT STEEL AMS 5735

2. SURFACE ROUGHNESS AS 291. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.

3 PART SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.

4 BREAK SHARP EDGES 003-.015 UNLESS OTHERWISE SPECIFIED.

5 DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± 010, ANGULAR DIMENSIONS ±5°

6 DO NOT USE UNASSIGNED PART NUMBERS

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 6 Nov 64 REVISED

P.A. USAF - 11 Other Cust Navy - WP	TITLE PIN, STRAIGHT, HEADED .248 DIAMETER, AMS 5735	MILITARY STANDARD MS9464 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

Review and User activities:
Air Force - 11
Navy - WP

This standard has been approved by the Department of the Air Force (11) and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:18Z
Check the source to verify that this is the current version before use.