
Review activities:
USAF - 82, 85

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

MS9684 (ASG)

FED SUP CLASS 5310

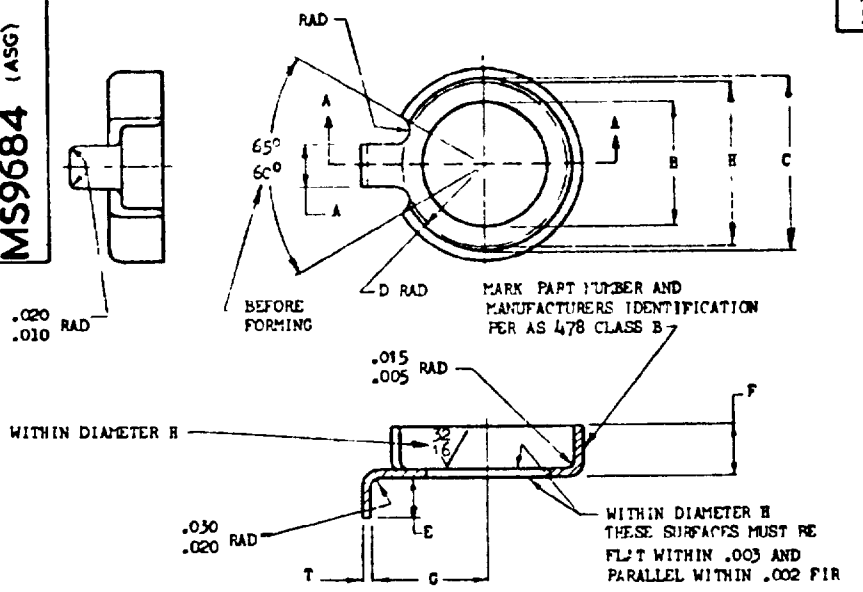

SECTION A-A

PART NUMBERS	NOM SIZE	A +.005 -.000	B +.010 -.005	C +.005 -.000	D +.000 -.010	E +.010 -.000	F ±.010	G ±.005	T MIN	T MAX	H	APPROX WEIGHT LB/100
MS9684-09	.190	.110	.219	.377	.170	.095	.140	.226	.019	.025	.347	.15
MS9684-10	.250	.110	.281	.440	.205	.100	.165	.270	.028	.036	.410	.30
MS9684-11	.312	.140	.344	.502	.235	.100	.165	.330	.028	.036	.472	.54
MS9684-12	.375	.140	.406	.564	.265	.140	.165	.370	.028	.036	.534	.38

1. DIAMETERS B & C SHALL BE CONCENTRIC WITHIN .005 FIR.
2. MATERIAL: CORROSION RESISTANT STEEL AMS 5510.
3. SURFACE ROUGHNESS, AS 291- UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES.
4. REMOVE BURRS AND SHARP EDGES.
5. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
6. HEAT TREATMENT: FORMED WASHERS SHALL BE ANNEALED AT 1925°F. TO 1975°F FOR 5 TO 10 MINUTES AND COOLED IN STILL AIR. WASHERS TO BE DESCALED.
7. DO NOT USE UNASSIGNED PART NUMBERS.

INACTIVE FOR NEW DESIGN AFTER 15 MAY 1968. USE MS9880

(A) **INTERCHANGEABILITY RELATIONSHIP – MS9880** PARTS CAN UNIVERSALLY REPLACE THE INACTIVATED MS9684 PARTS IDENTIFIED BY THE SAME DASH NUMBERS· BUT THE INACTIVATED MS PARTS CANNOT REPLACE THE SUPERSEDING MS9880 PARTS

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE& PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 15 Nov 65 REVISED (A) 15 May 68

P.A. USAF - 11	TITLE WASHER, CUP, LOCK - CRES AMS 5510	MILITARY STANDARD
Other Cust Navy - AS		MS9684 (ASG)
PROCUREMENT SPECIFICATION None	SUPERSEDES	

DD FORM 672-1 (Limited reproduction) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5310 - F003

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:22Z
Check the source to verify that this is the current version before use.