MILITARY SPECIFICATION

CAPE, MAN'S: U. S. MARINE CORPS BAND

1. SCOPE

1.1 Scope. This specification covers requirements for a dark blue serge cape.

1.2 Classification. The cape shall be one type in the following sizes as specified (see 6.2):

Schedule of sizes

Small	Medium	Large	Extra Large
34-36	38-40	42-44	46-48

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton.
V-T-301	- Thread, Silk.
DDD-L-20	- Label; For Clothing, Equipage, And Tentage, (General Use).
DDD-T-86	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached, or Dyed).

MILITARY

MIL-C-297	- Cloth, Interlining, Cotton Warp, And Spun Hair-Wool Filling.
MIL-C-326	- Cloth, Silesia, Cotton.
MIL-C-368	- Cloth, Satin, Rayon And Cloth, Twill, Rayon.
MIL-F-495	- Finish, Chemical, Black, For Copper Alloys.
MIL-C-823	- Cloth, Serge, Wool; Wool And Nylon.
MIL-C-21115	- Cloth, Tropical Wool, Polyester/Wool.
MIL-C-82252	- Cloth, Broadcloth, Wool, And Wool Synthetic.

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitch, Seam, And Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T21:08Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

DEPARTMENT OF AGRICULTURE
Title 9 Code of Federal Regulations - Part 95 - Sanitary Control of Animal By-products

(Application for copies of Code of Federal Regulations should be addressed to the U. S. Department of Agriculture, Washington, D. C. 20505.)

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. *Unless otherwise specified (see 6.2), before production is* commenced, a finished cape shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Basic material. The basic material shall be cloth, wool, serge, dark blue shade 3346 (see 6.3), conforming to type I, class 5 of MIL-C-823. The grade of wool shall be 60's.

3.3.2 Lining. The material for lining the cape shall be cloth, wool tropical, scarlet shade 2502 (see 6.3), conforming to type I, class 1 of MIL-C-21115, except the requirement for type of dye is not applicable.

3.3.3 Silesia. The material for the collar interlining shall be cloth, cotton, silesia, black, conforming to type III of MIL-C-326 (see 6.3). The requirements for nonfibrous material, seam efficiency, and colorfastness to light shall not apply.

3.3.4 Collar lining. The material for lining the collar shall be cloth, rayon, twill, 3.7 ounce, conforming to class 1 of MIL-C-368. The color of the cloth shall be black shade 2604 (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:08Z
Check the source to verify that this is the current version before use.

3.3.5 Cape front interlining. The material for the cape front interlining shall be cotton warp and hair-wool filling interlining cloth conforming to type I, class 2 of MIL-C-297.

3.3.6 Tape, cotton. The cotton tape, 3/8 inch wide, shall conform to type III, class 1 of DDD-T-86.

3.3.7 Thread.

3.3.7.1 Silk thread. Silk thread shall conform to V-T-301. The thread for machine sewing shall conform to type I, size A for all outside seaming and stitching. The thread for hand sewing shall be type III, class 3, size C, 2-ply.

3.3.7.2 Cotton thread. Cotton thread shall conform to V-T-276; type IC2, mercerized finish, ticket No. A, 3-ply for all inside seaming and stitching. The thread for basting shall be a good commercial grade.

3.3.7.3 Color and colorfastness. The thread shall be black shade No. 66043 for hand sewing, seaming and stitching the basic material, collar, collarstand, and scarlet shade No. 66040 for seaming and stitching the body lining and label; the cotton thread for basting may be white. The colored threads, when tested as specified in the applicable thread specification, shall show good fastness to wet (dry) cleaning and, in addition, the silk thread shall show good fastness to light.

3.3.8 Collarstand interlining. The material for interlining the collar shall be cloth, cotton, buckram, double texture, laminated, starch finish, natural color. The collarstand interlining, when tested as specified in Section 4, Table III, shall comply with the following requirements:

3.3.8.1 Collarstand interlining material. The buckram shall be made of cotton of suitable staple length and grade to meet the requirements of this specification, thoroughly cleaned, well carded, drawn and evenly spun. The weave of the single plies of the cloth shall be four harness, 2 up and 2 down herringbone twill, 20 ends right and 20 ends left. The two plies of the cloth shall have a minimum thread count per inch of 50 in the warp and 20 in the filling.

3.3.8.2 Lamination. The two plies of the cloth shall be thoroughly adhered together with a synthetic resin type laminating material which shall not cause an objectionable odor in the finished cloth. The laminated cloth shall show no evidence of delamination after being subjected to the wet (dry) cleaning, accelerated aging, and perspiration tests.

3.3.8.2.1 Finish. The original stiffness of the finished cloth, and the stiffness of the cloth after being subjected to the wet (dry) cleaning, accelerated aging and perspiration tests shall conform to the following:

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:08Z
Check the source to verify that this is the current version before use.

Stiffness, inch-pound	Minimum	Maximum
- original	0.60	0.95
- after accelerated aging	0.70	0.95
- after wet (dry) cleaning	0.50	0.85
- after perspiration	0.50	0.85

3.3.8.2.2 Weight. The weight of the finished laminated cloth shall be 21 to 23 ounces per square yard.

3.3.8.2.3 Breaking strength. The breaking strength of the finished laminated cloth shall be 100 pounds minimum in the warp direction and 80 pounds minimum in the filling direction. After being subjected to the accelerated aging test, the breaking strength of the cloth shall be not less than the original breaking strength.

3.3.9 Hanger braid. The braid for the cape hanger shall be cotton or rayon tubular flat braid 1/8 to 3/16 inch wide, and shall have a breaking strength of not less than 75 pounds in the warp direction. The color shall be black and shall show good fastness to crocking and wet (dry) cleaning. The hanger braid when tested as specified in Section 4, Table III, shall comply with the requirements specified herein.

3.3.10 Collarstand closure hook and eye. The hook and eye for closing the collarstand shall be brass, black japanned finish, or black chemical finish in accordance with MIL-F-495 followed by a clear lacquer coating and shall conform to the requirements shown in Figure 1 and the following. All surfaces and edges of the hook and eye shall be clean, smooth, free from burrs, tool marks, sharp edges, and roughness. The hook and eye shall be thoroughly and completely lacquered with the best available quality of black japanned lacquer. The dry lacquer film shall be continuous, level, adherent, free from lint, dust, or other foreign inclusions that may affect appearance or serviceability, and and shall withstand the test for tackiness. All apertures of the finished lacquered hook and eye shall be completely open and free of any lacquer film or black chemical finish. The hook and eye when tested as specified in Section 4, Table III, shall comply with the requirements specified herein.

3.3.11 Lower front closure hook and eye. The hook and eye for closing the lower front corners of the cape shall be brass, black enameled finish, size No. 16, commercial type. One hook and one eye are required per cape. All surfaces and edges of the hook and eye shall be clean, smooth, free from burrs, tool marks, sharp edges, and roughness. The hook and eye shall be thoroughly and completely lacquered with the best available quality of black japanned lacquer. The dry lacquer film shall be continuous, level, adherent, free from lint, dust, or other foreign inclusions that may affect appearance or serviceability, and shall withstand the test for tackiness. The hook and eye when tested as specified in Section 4, Table III, shall comply with the requirements specified herein.

3.3.12 Agraffe cord. The agraffe shall be made of black rayon braid, 3/16 inch in diameter, having 3 knots (one at the center and one midway between the center knot and each end), with a black slide 1 inch long on each side of the center knot and two 1-3/4-inch-long frogs at each end. The length of the finished agraffe shall be 18 to 25 inches (see Figure 2). The agraffe cord when tested as specified in Section 4, Table III, shall comply with the requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:08Z
Check the source to verify that this is the current version before use.

3.3.13 Haircloth. The reinforcement piece for the top front corner of the left and right cape fronts shall be haircloth, dyed black shade 340, 2-ply cotton yarn in the warp and natural horsehair in the filling. The finished cloth shall have a minimum thread count of 60 per inch in the warp and 40 per inch in the filling, shall weigh not less than 4.5 ounces per square yard, and shall contain not more than 1.0 percent of nonfibrous material. The horsehair shall meet current quarantine laws and pertinent regulations of the U. S. Department of Agriculture as set forth in Code of Federal Regulations. The haircloth when tested as specified in Section 4, Table III, shall comply with the requirements specified herein.

3.3.14 Collar tab. The material for the collar tab shall be cloth, broadcloth, wool, dark blue shade 2307 (see 6.3), 15.5 ounce, conforming to type I, class 2 of MIL-C-82252.

3.3.15 **Labels. Each cape shall have an identification label and a size label as follows. The cape is intended to be dry cleaned and the label shall show fastness to dry cleaning.**

3.3.15.1 **Identification label. The identification label shall conform to type I, class 1 of DDD-L-20, except the stock number may be omitted. The content and format shall be as follows:**

Nomenclature (item description)
Contract number
Name of contractor
Wool Products Act information

3.3.15.2 **Size label. The size label shall conform to type I, class 2, of DDD-L-20. The label shall consist of the size designation specified in 1.2 and the stock number as shown by the following example. The stock number may be incorporated in the identification label, below the contract number.**

Small
34-36
Stock number

3.4 Design. The cape shall be Marine Corps design shown on Figures 3, 4, and 5; fully lined with **hook and eye at lower front corners, agraffe cord with frogs at** the fronts; a two-piece back; soft roll collar with collarstand and single hook and eye for collarstand closure.

3.5 Patterns. The standard patterns furnished by the Government shall not be altered in any way and shall be used only as a guide for cutting the supplier's working patterns. The standard patterns provide 1/2-inch allowance for center **back seam, 3/8-inch allowance for shoulder and side seams and 1/4-inch allowance for front and collar edges. These patterns show size, are marked for placement and cutting, and are notched or marked for proper assembly of component parts.**

3.5.1 **List of pattern parts.** The cape shall be cut from the materials specified **herein in accordance with pattern parts indicated below:**

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:08Z
Check the source to verify that this is the current version before use.

Item	Pattern nomenclature	Cut parts
	Material: Cloth, wool, serge	
1.	Front	2
2.	Back	2
3.	Top collar	1
4.	Under collar	1
5.	Collarstand (outer ply)	1
	Material: Cloth, wool, tropical	
6.	Front	2
7.	Back	2
	Material: Cloth, rayon lining	
8.	Collarstand lining	1
	Material: Cloth, silesia, cotton	
9.	Collarstand interlining	1
	Material: Cloth, buckram, cotton (double textured; double ply)	
10.	Collarstand interlining	1
	Material: Cloth, cotton, warp, hair-wool filling	
11.	Body part	2
12.	Chest piece	2
13.	Under collar	1
	Material: Haircloth	
14.	Top front corner reinforcement	2
	Material: Cloth, wool, broadcloth	
15.	Collar tab	1

3.6 Construction.

3.6.1 Manufacturing requirements. The capes shall be manufactured in accordance with the operations and the stitch, seam and stitching types specified in Table I.

3.6.1.1 Operations. The supplier is not required to follow the exact sequence of the operations listed in Table I but all operations specified shall be used to manufacture the capes. Any additional pressing or basting or holding stitching may be used to facilitate manufacturing provided the bastings or holding stitching are removed or do not show in the finished cape.

3.6.1.2 Stitches, seams and stitching. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.2.1 Ends of seams and stitching. Ends of seams and stitchings (stitch type 301), except the ends of a continuous line of stitching, when not caught in other seams or stitchings, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

3.6.1.3 Shade marking. The component parts of the cape cut from one piece of basic material, and lining material, shall be shade marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.

(b) Adhesive type tickets which show discoloration or the use of an adhesive mass which adheres to the material upon removal of the tickets.

Source: https://assist.dla.mil - Downloaded: 2026-10-20T21:08Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting. a. Cut capes in strict accordance with patterns furnished. b. Cut all materials in the direction indicated by the directional lines on the patterns. The straight of the cloth indicates the warp direction. c. Cut all wool parts from one piece of basic material. d. Cut the body lining from one piece of wool tropical material. e. Cut the collarstand lining from one piece of rayon lining material. f. Cut the collarstand interlining from one piece of silesia cotton material. g. Cut the collarstand interlining from one piece of buckram material. h. Cut the collar tab from one piece of wool broadcloth material. i. Cut cape front interlinings in strict accordance with pattern furnished. j. The use of drill holes is prohibited.					
2.	Replacement of damaged parts. a. Replace at time of cutting any part containing damages such as holes or seriously weakening defects such as smashes, multiple floats, and slubs likely to develop into holes. b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissor or knife cuts, tears, holes, mends, and burns.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:08Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
3.	Shade marking.					
	a. Mark all component parts cut from one piece of basic and body lining materials to insure uniform shade and size throughout the cape.					
	b. The use of tickets with metal fastening devices or sew-on tickets is prohibited on the rayon lining.					
4.	Make collarstand (see Figure 6).					
	Finished appearance. The cotton silesia material shall finish on the lining side of the collarstand The collarstand shall be smooth and flat and shall be uniformly stitched without twists, gathers, puckers or pleats.					
	a. The collarstand shall be made of one ply each of basic material, silesia and cotton buckram.					
	b. Position the cotton silesia on the collarstand interlining material with all edges even. Seam the silesia material to the collarstand interlining 1/8 to 3/16 inch from top and bottom edges and each end.	301	SSa-1	10-14	A (cotton)	A (cotton)
	c. Lap the lower edge of silesia side of collarstand interlining approximately 1/2 inch on lower inside edge of collarstand outer ply. The outer ply shall extend not less than 1 inch beyond the ends of the interlining. Seam interlining to outer ply 1/4 inch from lower edge of interlining.	301	LSa-1	10-14	A (cotton)	A (cotton)
	d. Smoothly fold lower edge of outer ply over the lower edge of interlining. Seam the interlining to the outer ply 1/4 inch from upper edge of interlining.	301	SSbd-1	10-14	A (cotton)	A (cotton)
	e. Trim upper edge of collarstand outer ply to within 1/2 inch from upper edge of collarstand interlining.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:08Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
4.	Make collarstand (see Figure 6). (cont'd)					
	f. Smoothly fold the ends of the outer ply over the ends of the interlining; turn under lower edge sufficiently so as not to be visible in the finished collar-stand. Tack the raw end and lower folded end of the outer ply to the turned-under position of the outer ply and silesia with overcast stitching.	Hand		2-3	C (silk) (black)	
5.	Make collar.					
	Finished appearance. The collar shall be uniform in appearance, shall be smooth and flat and shall be uniformly stitched without twists, gathers, puckers or pleats.					
	a. The collar shall consist of two plies of basic material and shall be interlined with one ply of cotton warp and spun-hair-wool filling material.					
	b. Position the interlining material on the inside of the undercollar with all edges even. The interlining and under-collar shall be padded with four to six rows of blindstitching with fullness on interlining between the rows of stitch-ing to roll collar.	103	SSm-6	4-6	A (cotton) (black)	
	c. Position the top collar on the outside of undercollar with edges even. Seam top collar to undercollar 3/16 to 1/4 inch from ends and top edge.	301	SSe-2 (a)	10-14	A (cotton) or A (silk)	A (cotton) or A (silk)
	d. Turn collar, working the corners and seam out to the edges and baste along the seamed edges.	101 or Hand			commercial	
	e. Edgestitch the collar uniformly 3/8 inch from seamed edges. Continue the stitching 3/16 to 1/4 inch along the raw edge of collar.	301	SSe-2 (b) (seamed edges) SSa-1 (raw edges)	12-16	A (silk)	A (silk)
	f. Press the collar smooth and flat with a heated pressing iron or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:08Z
Check the source to verify that this is the currentversion before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
6.	Join collar to collarstand.					
	a. Position collar and collarstand together with raw edges even. Join collar to collarstand with 3/8-inch seam.	301	LSq-2 (a)	10-14	A (cotton)	A (cotton)
7.	Join collarstand lining to collar and collarstand.					
	a. Position collarstand lining, collar and collarstand together with raw edges even and ends of the lining extending not less than 1 inch beyond ends of collarstand.					
	b. Join collarstand lining to seam allowance for collarstand outer ply and collar with 1/4-inch seam.	301	LSq-2 (a)	10-14	A (cotton)	A (cotton)
8.	Topstitch and edgestitch collarstand.					
	Finished appearance. The collarstand shall be uniformly stitched without twists, gathers, puckers or pleats.					
	a. Edgestitch ends of collarstand 1/8 inch from folded end. Continue to topstitch along the upper edge of collarstand 3/16 inch from raised edge, with the seam allowance of the collar, collarstand and lining turned down toward the neck edge of the collarstand and caught in the stitching.	301	EFa-1 (collarstand ends) LSq-2 (top edge of collarstand)	12-16	A (silk)	A (silk)
	b. Crease the upper edge of collar along the top edge of the collarstand smooth and flat with a heated pressing iron or pressing machine.					
9.	Make front interlining.					
	a. The interlining for the fronts shall consist of a body and chest piece cut from cotton warp and spun hair-wool cloth and upper front corner reinforcement pieces cut from hair cloth.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:08Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
9.	Make front interlining. (cont'd)					
	b. Position the corner reinforcement pieces between the body and chest components with raw edges even at the front and gorge edges. Quilt all components together with 10 to 12 vertical rows of zig-zag stitching approximately 1/2 inch apart and extending from top to bottom edge of chest piece.	301		4-6	A (cotton)	A (cotton)
10.	Interline front parts.					
	a. Position the left and right front parts on the respective front interlinings with upper and front edges even.					
	b. Baste front part to interlining along the vertical center, distributing the fullness over the breast area. The basting shall extend from approximately 2 to 2-1/2 inches from shoulder edge of fronts to approximately 1-1/2 inches from bottom edge. Baste diagonally along shoulder edge, gorge, front and back edges.	301 or Hand	Hopper		commercial	
	c. Trim front edge of interlining 1/4 inch back from front edge of front parts and trim even along the gorge. Trim the bottom edge of interlining in line with the front bottom notch of cape.					
11.	Join back parts.					
	Finished appearance. The back parts shall be joined without twists, gathers, puckers or pleats.					
	a. Position the back parts face to face with edges even and join at the center back with a 1/2-inch seam.	301	SSa-1	10-14	A (cotton)	A (cotton)
12.	Join fronts to back parts.					
	Finished appearance. The back and front parts shall be joined at the shoulder and sides without twists, gathers, puckers and pleats.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:08Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD Needle	THREAD Bobbin or Looper
12.	Join fronts to back parts. (cont'd)					
	a. Position the front and back parts face to face with shoulder, side seam and bottom edges even and with the 3/8-inch wide cotton tape positioned on the front parts 1/4 inch back from the edge. The tape shall extend along the shoulder from the neck edge to the second notch.					
	b. Join fronts to back parts along shoulder and side edges with a 3/8-inch seam, catching the tape in the stitching.	301	SSab-1	10-14	A (cotton)	A (cotton)
13.	Press back and side seams.					
	a. Spread open the shoulder, side and back seams and press smooth and flat with a heated pressing iron.					
	b. Tack shoulder edge of interlining to shoulder edge of back part seam allowance.	301 or Hand	SSa-1	6-8 4-6	A (cotton)	A (cotton)
14.	Assemble body lining.					
	a. Position back linings with edges even and join at the center back with a 1/2-inch seam.	301	SSa-1	10-14	A (cotton) (scarlet)	A (cotton) (scarlet)
	b. Position front and back linings face to face with shoulder, side seam and bottom edges even.					
	c. Join front to back linings along shoulder and side edges with a 3/8-inch seam.	301	SSa-1	10-14	A (cotton) (scarlet)	A (cotton) (scarlet)
15.	Sew on identification label.					
	Finished appearance. The identification label shall be centered on the outside of the body lining at the center back seam, and with the top edge of label approximately 2 inches below the neckline.					
	a. Sew the identification label to the outside of the body lining with a single row of stitches 1/16 inch from each edge.	301	SSa-1 (each edge)	10-14	A (cotton) (scarlet)	A (cotton) (scarlet)

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:08Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
16.	Mark cape for bottom turnup.					
	a. Mark the cape 1-1/4 inches from the bottom edge for the turnup.					
17.	Join body lining assembly to bottom edge.					
	a. Position the bottom edge of body lining to the bottom edge of cape face to face and with all edges even.					
	b. Join the body lining to cape along the bottom edges with a 1/4-inch seam.	301	SSa-1	10-14	A (cotton) (black)	A (cotton) (black)
18.	Fold and stitch turnup.					
	a. Turn up bottom corner edges of cape and body lining at their respective notches. Stitch bottom turnup 3/16 inch from front edges catching the body lining in stitching. The stitching extends the width of the turnup.	301		10-14	A (cotton) (black)	A (cotton) (black)
19.	Join body lining to fronts with tape.					
	a. Baste the body lining to the cape along the front edges.	301 or Hopper			commercial	
	b. Join the body lining to fronts with a 1/4-inch seam along the front edges of cape with a 3/8-inch wide stay tape positioned on the interlining side of fronts 1/8 inch back from raw edge of interlining and caught in the stitching. Continue the stitching to bottom edge of cape. The tape shall be sewn with slight tension and shall extend from top edge of cape to approximately 1-1/2 inches above the bottom edge of cape.	301	SSab-1	10-14	A (cotton) (black)	A (cotton) (black)
	c. Fell the inner edge of the 3/8-inch-wide tape to the front interlining from top to bottom ends.	103	SSm-1	4-6	A (cotton)	
	d. Press the front edges smooth and flat, with a heated pressing iron or pressing machine, removing the fullness. Remove all basting stitches.					
	e. Spread open the front-body lining seam allowance from top edge of cape to the bottom edge and press smooth and flat with a heated pressing iron.					

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:08Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD Needle	THREAD Bobbin or Looper
20.	Baste front edges and bottom turnup.					
	a. Turn the body-lining assemblies right side out, completely working out the corners.					
	b. Baste along the front edges, working the body lining 1/16 to 1/8 inch back from the front edges, turn up the bottom edge of cape at the mark and continue basting along the bottom edge with the body lining 1/2 inch from bottom edge. The body lining at front and bottom edges shall not be visible from outside of cape.	301 or Hand	Hopper		commercial	
21.	Edgestitch fronts and bottom edges.					
	Finished appearance. The cape shall be uniformly edgestitched. The body lining at bottom edge of cape shall not be caught in the edgestitching.					
	a. Edgestitch the left and right front and bottom uniformly 3/8 inch from the front edges of cape.	301	SSe-2 (front edges)	12-16	A (silk) (black)	A (silk) (scarlet)
	b. Continue the stitching along the bottom edge of cape.	301	EFa-1 bottom edge		A (silk) (black)	A (silk) (black)
22.	Seam neckline, with size label and hanger.					
	Finished appearance. The neckline shall finish smooth and flat without twists, pleats, or puckers. The size label shall be positioned between the ends of the cape hanger. Ends of cape hanger shall be positioned so that in the finished cape, the hanger opening shall be 2 ±1/8 inches long when measured along the lower edge of collar lining.					
	a. Join the body lining to the cape at the neckline from end to end with a 1/4-inch seam and with the upper edge of the size label and ends of the cape hanger properly positioned and caught in the stitching at the inside center back. Also, catch in the stitching a 3/8-inch-wide tape across the back of cape (at the neckline) overlapping the shoulder seams not less than 1 inch.	301 301	SSa-1 SSab-1 (tape)	10-14 10-14	A (cotton) A (cotton)	A (cotton) A (cotton)

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:08Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
23.	Set collar.					
	Finished appearance. The collar shall be carefully joined to the cape without twists, puckers, pleats, raw edges, or distortion.					
	a. Mark neckline on the outside 1/2 inch from top edge for proper positioning of collar.					
	b. Position the collar with the lower edge lapped on the outside top edge of cape at the mark.					
	c. Seam the collar to the cape from end to end 1/8 inch from lower edge of collar. The stitching shall not be through the collar lining.	301	LSa-1	12-16	A (silk) (black)	A (silk) (black)
24.	Sew hook and eye to collar stand.					
	Finished appearance. The hook and eye shall be positioned to properly engage each other, effecting a flat, smooth closure at the front of collar without misalignment or gap.					
	a. Position and securely sew the hook to the right end and the eye to the left end of the collarstand.	Hand		10 per hook and eye (minimum)	C (silk double thread) (black)	
25.	Finish collar.					
	a. Securely tack the lower corners of the collarstand to the cape.	Hand		8-10	C (silk) (black)	
	b. Turn under and fell the lower edge of the collar lining to the cape from end to end.	Hand		8-10	C (silk) (black)	
	c. Turn under the end of the lining at right and left end of the collarstand and position the folded edge of the lining under the hook and eye. Fell the folded end of the collar lining to the end of the collar.	Hand		8-10	C (silk) (black)	

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:08Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
25.	Finish collar. (cont'd)					
	d. Position the collar tab on the inside of the collarstand at the left end, with the collar tab extending approximately 3/4 inch beyond the front end of collarstand Fell the top, back and bottom raw edges of tab to collar lining.	Hand		8-10	C (silk) (black)	
26.	Clean cape.					
	a. Pull all basting thread, trim and remove any loose ends of thread, and remove any spots, stains and tickets without injury to the material.					
27.	Press cape.					
	Finished appearance. The cape shall be well pressed throughout with a heated pressing iron or pressing machine of a type suitable to obtain the desired shape and appearance in accordance with good manufacturing practice.					
	a. Press the fronts smooth and flat, straightening and shaping the front edges and working the fullness towards the chest. Care shall be exercised in pressing the fronts so that the bottom edges are even.					
	b. Press the top collar smooth and flat.					
	c. Press the fronts on a body machine, shrinking in and properly shaping the chest.					
	d. Press the sides smooth and flat.					
	e. Press the back smooth and flat.					
	f. Press the lower edge of cape smooth, flat and even.					
	g. Press body lining throughout, removing all wrinkles and creases.					

Source: https://assist.dla.mil Downloaded: 2026-10-20T21:08Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
28.	Sew on hook and eye at lower front corners.					
	Finished appearance. The hook and eye shall be positioned to properly engage each other effecting a flat, smooth closure at the lower front corners of cape without misalignment or gap. The hook and eye shall be sewn through the basic material only, and shall not be visible on the outside of cape.					
	a. Sew the hook to the inside right front corner and the eye to the inside left front corner in a horizontal position.	Hand		3-4	C (silk) (black)	
29.	Mark and tack on agraffe cord and frogs to fronts.					
	Finished appearance. The frogs and agraffe cord shall be securely attached without causing distortion to the front parts. The agraffe is permanently attached to the left side and buttons over a frog on the right side of cape. The center knot of agraffe cord shall be centered with the front opening of cape.					
	a. Mark the left and right front parts 3 ±1/4 inches from the lower edge of the collar stand and 2 ±1/4 inches from the shoulder seam line.					
	b. Position the frog with the attached agraffe cord at the mark on the left front and tack the under side of the agraffe cord to the basic material and interlining only.	Hand		6-8 (double thread)	C (silk) (black)	
	c. Position the unattached frog at the mark on the right front and tack the under side of the frog to the basic material and interlining only.	Hand		6-8 (double thread)	C (silk) (black)	

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:08Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished cape shall conform to the measurements shown in Table II.

Table II. Cape measurements 1/

Size	Collar length 2/ inches	Back length 3/ inches
34-36 Small	18	39
38-40 Medium	19	39-1/2
42-44 Large	20	40
46-48 Extra Large	21	40-1/2
1/ Tolerance	± 1/4	± 3/4

2/ Collar stand length measurement shall be taken along the center from end to end.

3/ Back length measurement shall be taken along center back seam from lower edge of collarstand to the finished bottom of cape.

3.8 Workmanship. The finished capes shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsibile for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Inspection for acceptance. Inspection shall be in accordance with provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.2.1 First article inspection. When first article is required, inspection shall be made of a completely fabricated cape for conformance to all provisions of this specification.

4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition to testing provisions contained in subsidiary specifications, figures and standards, testing shall be performed on components listed in Table III for characteristics noted. Wherever applicable, tests shall be conducted in accordance with FED-STD-191. When the "No. Determinations per sample unit" and "Results reported as" columns are not indicated, they shall be reported as required by the referenced test method. All test reports shall contain the individual values utilized in expressing the final results.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:08Z
Check the source to verify that this is the current version before use.

Table III - Test methods

Components	Characteristics	Rqmt. para.	Test method	No. determinations per sample unit	Results reported as
Cloth,cotton buckram (collar interlining)	Material identification	3.3.8.1	1200	1	Pass or fail
	Weave (single ply)	3.3.8.1	Visual	1	Pass or fail
	Texture-threads per inch (single ply):	3.3.8.1	5050		Avg. of the 3 det.
	- warp			3	in each direction to
	- filling			3	the nearest whole number.
	Resistance to:				
	- wet(dry) cleaning (laminated cloth)	3.3.8.2	4.3.1(b)	1	No evidence of delamination.
	-accelerated aging (laminated cloth)	3.3.8.2	4.3.1(c)	1	No evidence of delamination.
	-perspiration (laminated cloth)	3.3.8.2	4.3.1(d)	1	No evidence of delamination.
	Stiffness				
	-original	3.3.8.2.1	4.3.1(a)	10	Nearest 0.001 in. lb.
	-after wet (dry) cleaning	3.3.8.2.1	4.3.1(b)	10	Nearest 0.001 in. lb.
	-after accelerated aging	3.3.8.2.1	4.3.1(c)	10	Nearest 0.001 in. lb.
	- after perspiration	3.3.8.2.1	4.3.1(d)	10	Nearest 0.001 in. lb.
	Weight-oz. per sq. yd.	3.3.8.2.2	5041	5	Avg of the 5 det. to nearest 0.1 oz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:08Z
Check the source to verify that this is the current version before use.

Table III - Test methods (cont'd)

Components	Characteristics	Rqmt. para.	Test method	No. determinations per sample unit	Results reported as
	Breaking strength,lbs. (laminated cloth)				
	Original-warp	3.3.8.2.3	5100	5	Avg. of 5 det. in each direction to the nearest 1.0 lbs.
	Original-filling			5	
	after accelerated aging				
	- warp		4.3.1(c)	5	Avg. of 5 det to nearest 1.0%.
	- filling		5100	5	Avg. of 5 det in each direction to nearest 1.0 lb.
Hanger braid	Color	3.3.9	Visual	1	Pass or fail
	Width (in.)	3.3.9	Visual	1	Pass or fail
	Breaking strength-lbs. (min.) - warp	3.3.9	4102	5	Avg of 5 det to the nearest 1b.
	Material identification 1/	3.3.9	1200,1500 or 1510	1	Pass or fail
	Colorfastness to:				
	-wet(dry) cleaning	3.3.9	5622	1	Good, fair or poor
	-crocking	3.3.9	5650	1	Good, fair or poor
Collar hook and eye	Material identification 1/	3.3.10	Std. comml	1	Pass or fail
	Design	3.3.10	Visual	1	Pass or fail
	Measurements	3.3.10	Std. comml	1	Pass or fail
	Finish (appearance)	3.3.10	Std. comml.	1	Pass or fail
	Finish (tackiness)	3.3.10	4.3.2	1	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:08Z
Check the source to verify that this is the current version before use.

Table III - Test methods (cont'd)

Component	Characteristics	Rqmt. para.	Test method	No. determinations per sample unit	Results reported as
Hook and eye	Material identification 1/	3.3.11	Std comml	1	Pass or fail
	Finish	3.3.11	Std comml	1	Pass or fail
	Finish	3.3.11	4.3.2	1	Pass or fail
Agraffe	Material identification 1/	3.3.12	Std comml	1	Pass or fail
	Color	3.3.12	Visual	1	Pass or fail
	Length (in.)	3.3.12	Visual	1	Pass or fail
Haircloth	Material identification 1/				
	- warp	3.3.13	1200		
	- filling	3.3.13	Std comml	1	Pass or fail
	Yarn ply, warp	3.3.13	Visual	1	Pass or fail
	Yarns per inch	3.3.13	5050	5	To nearest whole no. of yarns.
	Weight, oz. per sq. yd.	3.3.13	5041	5	Avg. of the 5 det to nearest 0.1 oz.
	Nonfibrous material	3.3.13	2611	2	Any of the 2 det to nearest 0.1 percent.

1/ Accept a certificate of compliance for this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:08Z
Check the source to verify that this is the current version before use.

4.2.2.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified.

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

The unit for expressing lot size and sample unit for testing each component shall be in accordance with the applicable subsidiary specification and as follows:

Component	Lot size expressed as	Sample unit for testing
Collarstand interlining (buckram)	Yards	1 yd. full width
Hanger braid	Yards	2 yds.
Hook & eye	100 each	2 ea., hook and eye
Agraffe Cord	1 each	2 each
Haircloth	Yards	1 yd. full width

4.2.2.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements or operations or subassemblies.

4.2.3 Examination of the end item. The end item shall be examined for defects listed in 4.2.3.2, 4.2.3.3, 4.2.3.4 and 4.2.3.5. The sample unit shall be one cape.

4.2.3.1 Classification of defects. All defects shall be classified as indicated below except those with an asterisk (*) in the classification column which shall be classified as follows:

Major defect - When seriously affecting appearance or serviceability.
Minor A defect - When affecting appearance or serviceabiliby but not seriously.

4.2.3.2 General defects. General defects shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:08Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Cleanness	a. Any spot or stain clearly noticeable:			
	- on outside.	X		
	- on inside.			X
	b. Thread ends not trimmed or loose threads not removed on major portion of cape.			X
	c. Two or more shade tickets not removed.			X
Components and assembly	a. Any defective component or defect of assembly (not herein classified).		*	
	b. Any component part or required operation omitted (not herein classified).		*	
Cutting	a. Any component part of wool material not cut in accordance with directional lines on patterns or specification requirements.	X		
	b. Any component part other than wool material not cut in accordance with directional lines on patterns or specification requirements.		X	
Hook and Eye	a. Hook or eye omitted at ends of collarstand or at inside of lower front corners.	X		
	b. Not specified type or size.		X	
	c. Hook or eye not securely sewn to ends of collarstand or at inside of lower front corners.		X	
	d. Hook or eye positioned other than specified at ends of collarstand or at inside of lower front corners.		X	
Material defects and damages	a. Any weakening defect, such as smash, multiple float, loose slub, etc., that may develop into a hole.		*	
	b. Any hole.		*	
	c. Shade bar, slub, knot, etc., affecting appearance:			
	- on outside.		*	
	- on inside.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:08Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	d. Scissors or knife cut, tear, mend or burn.	*		
	e. Needle chew that may develop into a hole.	*		
	f. Exposed drill hole.	*		

NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which weakens the material or garment or affects appearance. Weakening or nonweakening conditions which are inconspicuous and have negligible effect on serviceability are to be classified as follows:

Material defect - No defect
Workmanship damages - Minor B defect

Pressing	a. Burned or scorched.	*		
	b. Poorly pressed (unless otherwise classified).		X	
	c. Basting, or pressing impressions, not removed on major portion of cape, affecting appearance.			X
	d. Edges bulky, i.e., not pressed solid, affecting appearance.		X	
	e. Body lining not smoothly pressed.			X
	f. Seams on cape not pressed opened as required.		X	
	g. Upper edge of collar along top edge of collarstand not crease pressed as specified.		X	
Seams and stitching	a. Accuracy of seaming:			
	1. Seam twisted, puckered or pleated, affecting appearance.		X	
	2. Part of garment caught in any unrelated operation or stitching.	*		
	3. Unsightly hand felling or blind-stitching exposed and visible on outside of cape, affecting appearance.		X	

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:08Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	4. Thread break or ends of seam or stitching, when not caught in other seams or stitchings, except ends of continuous row of stitching, not securely backtacked.		X	
	5. Ends of a continuous line of stitching overlapped less than 1/2 inch.		X	
	6. Not specified color of thread or various shades of thread used on outside or inside of cape.	*		
	b. Gage of stitching:			
	1. Beyond range of gage specified or varies from gage specified more than 1/16 inch when no range is specified.			X
	2. Irregular, i.e., unevenly gaged or various stitchings not uniform, affecting appearance (to be scored only when the condition exists on major portion of seam).		X	
	3. Edge or raised stitching too close to edge, resulting in damage to cloth.	*		
	c. Open seams (broken, missing, skipped stitches, except on top, raised or edge stitching, not resulting in an open seam):			
	1. On outside of cape:			
	- not more than 1/8 inch.			X
	- more than 1/8 inch but not more than 1/2 inch.		X	
	- more than 1/2 inch.	X		
	2. Inside of cape (except hand felling):			
	- not more than 1/4 inch.			X
	- more than 1/4 inch.		X	
	3. Hand felling:			
	- not more than 1/8 inch.			X
	- more than 1/8 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:08Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	d. Stitches skipped, missing or broken on top, edge or raised stitching not resulting in an open seam:			
	- 1/4 inch or more but not more than 1/2 inch.			X
	- more than 1/2 inch.		X	
	e. Raw edges:			
	1. On outside:			
	- less than 1/8 inch.			X
	- 1/8 inch or more but not more than 3/8 inch.		X	
	- more than 3/8 inch.	X		
	2. On inside:			
	- 1/8 inch or more but not more than 3/8 inch.			X
	- more than 3/8 inch.		X	

NOTE: Raw edges (classified as such when they occur at places where an edge is required to be turned under) not securely caught in the stitching shall be classified as an open seam.)

	f. Run-offs:			
	1. Joining seams-when resulting in an open seam, use "Open seam" classification.			
	2. Top, edge or raised stitching (when not resulting in an open seam):			
	- 1/4 inch or more but not more than 1/2 inch.			X
	- more than 1/2 inch.		X	
	g. Seam and stitch type:			
	1. Not type specified.		X	
	h. Stitch tension:			
	1. Loose tension, resulting in a loose seam.	X		
	2. Loose tension on edge or raised stitchings, resulting in loosely exposed bobbin thread or top thread.		X	
	3. Tight tension (stitches break when normal strain is applied to seam or stitching), classify as open seam.			

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:08Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	NOTE: Puckering is evidence of tight tension; when puckering is evident, the seam shall be tested by exerting pull in the lengthwise direction of the seam or stitching.			
	i. Stitches per inch, (to be scored only if the condition exists on major portion of seam):			
	1. Less than the minimum specified:			
	(a) Except on identification label:			
	- 1 or 2 stitches.			X
	- 3 stitches.		X	
	- 4 or more stitches.	X		
	(b) On identification label:			
	- 1 or more stitches on label.			X
Shaded parts	a. Any outside part shaded.	*		
	b. Any body lining (scarlet) parts shaded.		X	

4.2.3.3 Detailed defects (outside of cape). Detailed defects on outside of cape shall be classified as follows:

Examine	Defect	Classification Major (*)	Minor A	Minor B
Alignment of hook and eye at end of collarstand	a. Not aligned, causing collar ends to be uneven by 1/4 inch or more when front is fastened.		X	
	b. Ends of collar spread open 1/4 inch or more when front is fastened.		X	
Alignment of hook and eye at lower front corners	a. Not aligned, causing a noticeable bulge or twist on fronts when engaged.		X	
	b. Fronts uneven at bottom of cape by more than 1/4 inch.		X	
Collar (construction and setting)	a. Tight; i.e., causing puckers on back or fronts.	*		
	b. Loose, i.e., setting away from neck.	*		
	c. Joining seam of collar to neckline of cape caught through collar lining.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:08Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	d. Collar lining exposed beyond top creased edge of collar.		X	
	e. Collar edge:			
	1. Crooked, affecting appearance.		X	
	2. Undercollar exposed along collar edge, affecting appearance.		X	
	f. Topcollar:			
	1. Tight, i.e., causing edges to curl or bulge on undercollar, affecting appearance.	*		
	2. Twisted, i.e., having a diagonal twist, affecting appearance.	*		
	3. Full, i.e., having excessive puckers or fullness, affecting appearance.	*		
	g. Undercollar:			
	1. Interlining pleated, affecting smoothness of topcollar, affecting appearance.	*		
	2. Interlining tight or twisted, causing puckers on undercollar.		X	
	3. Interlining omitted.	X		
	h. Collar shape:			
	1. Not uniform, i.e., ends of collar vary in length by 1/4 inch or more.		X	
	2. Pointed ends poorly shaped or not of uniform shape or size.	*		
	i. Collar tab:			
	1. Omitted.	X		
	2. Tab extending less than 3/4 inch beyond front end of collar.		X	
	3. Not positioned on inside of collar at left end of collar.	X		
	4. Hand felling omitted or insecure at top, back or bottom raw edges of tab to collar lining.		X	

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:08Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	j. Collarstand:			
	1. Edgestitching omitted along folded end or along upper edge of collarstand.	X		
	2. Seam allowance of the collar, collarstand and lining not turned down towards the neck edge of the collar stand or seam allowance not caught in the raised stitching.		X	
	3. One or both corners not securely tacked to cape.		X	
Body lining (scarlet)	a. Fitting of lining:			
	1. Tight, short, or twisted, causing fullness or twist on outside of cape, affecting appearance.	*		
	2. Lining too long, i.e., exposed beyond bottom edge of cape, affecting appearance.		X	
	b. Fitting of interlining:			
	1. Tight, short, or twisted, causing fullness or twist on outside of cape, affecting appearance.	*		
	2. Too full, causing cape front to have a wavy appearance, affecting appearance.	*		
	3. Tacking of shoulder edge of interlining to shoulder edge of back part seam allowance omitted or insecure.		X	
Front and bottom edges	a. Front edges stretched, affecting appearance.		X	
	b. Tape set on tight, causing puckering on front, affecting appearance.		X	
	c. Front edges irregular, causing curved or crooked edges, affecting appearance.		X	
	d. Front edges bulky or not properly forced out.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:08Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	e. Scarlet lining exposed on right or left front edge.			X
	f. Bottom corner at one or both fronts poorly shaped.		X	
	g. Bottom edge stretched or uneven.			X
Agraffe cord and frogs (Position alignment and attachment to fronts of cape)	a. Positioned less than 2-1/2 inches or more than 3-1/2 inches from lower edge of collarstand.		X	
	b. Positioned less than 1-1/2 inches or more than 2-1/2 inches from shoulder seam line.		X	
	c. Ends of cord out of horizontal alignment by more than 1/2 inch when agraffe cord is buttoned onto the frog on right front.		X	
	d. Tacking stitches at one or both ends of cord caught through scarlet lining.		X	
	e. Tacking at one or both ends of cord to cape insecure.		X	
	f. Reversed, i.e., agraffe cord with frog on right front and unattached frog on left front.	X		
	g. Front part distorted when agraffe is buttoned onto frog on right side of cape.		X	

4.2.3.4 Detailed defects (inside of cape). Detailed defects on inside of cape shall be classified as follows:

Examine	Defect	Classification Major (*)	Minor A	Minor B
Hanger braid	a. Missing, or ends not securely caught in body lining joining seam at neckline.		X	
	b. Less than 1-7/8 inches or more than 2-1/2 inches long.			X

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:08Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Identification label	a. Missing, incorrect or illegible.		X	
	b. Not stitched on all four sides.			X
	c. Top edge positioned less than 2 inches or more than 2-1/2 inches below neckline.			X
Size label	a. Omitted, incorrect or illegible.		X	
	b. Not securely caught in body lining joining seam at neckline.		X	
Scarlet body lining	a. Excessive fullness or twist not affecting smoothness on outside of cape.			X
	b. One or more seams not pressed open.		X	
	c. Bottom edge of lining less than 1/2 inch up from bottom of cape.			X
Bottom hem (cape)	a. Twisted not affecting smoothness on outside of cape.			X

4.2.3.5 Finished measurements. Any measurement deviating from the nominal dimension and tolerance specified in Table II shall be classified as a size measurement defect.

4.2.3.6 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.2.3.2 through 4.2.3.4

Inspection Level III of MIL-STD-105

AQL's		
	Major	1.5 DHU
	Major and Minor A (combined)	10.0 DHU
	Total Major, Minor A and Minor B (combined)	25.0 DHU

4.2.3.5

Inspection Level S-3 of MIL-STD-105

One class	4.0 DHU

4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged, selected just prior to closing operation. Defects of closure listed below will be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lost shall be S-2 and the AQL shall be 2.5 DHU.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:08Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (Exterior and Interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of capes per shipping container is more less required.

4.3 Tests.

4.3.1 Stiffness. The stiffness tests shall consist of the following:

a. The original test for stiffness shall be in accordance with method 5202 of FED-STD-191, using a moment-weight of 1 pound.

b. The after wet (dry) cleaning test shall be in accordance with method 5622 of FED-STD-191 except the material shall be subjected to three 20-minute test cycles.

c. The after accelerated aging test shall be in accordance with method 5850 of FED-STD-191, except the aging process shall be limited to 5 hours at a temperature of 100°C.

d. The after test for perspiration shall be in accordance with method 5682 of FED-STD-191, except the material shall be immersed in the specified solution for 20 minutes and then air-dried.

4.3.2 Tackiness. At room temperature (60° to 80°F), press a piece of tissue paper against the lacquered surface for 30 seconds, using any pressure capable of being exerted by the thumb and two fingers. The tissue shall not adhere to the lacquered surface, but shall fall free when pressure is released.

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:08Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Capes shall be packaged in accordance with industry's practice.

5.2 Packing. Capes, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The capes described herein are intended for wear by enlisted personnel of the U.S. Marine Corps Band.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

6.2.1 Procurement requirements:

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) Whether first article is required (see 3.2).


6.2.2 Contract data requirements. Data conforming to Data Item Description DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

6.3 Samples and shade samples. For information regarding the availability of samples of the cape and the standard shades specified address inquiry to the procuring activity issuing the invitation for bids.

6.4 Supersession data. This specification includes the requirements of Marine Corps Purchase Description PD - 115(MCSA) dated 29 June 1970 for Cape, Man's: U. S. Marine Band.


Preparing activity:
Navy - MC
Project number 8405-N440

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:08Z
Check the source to verify that this is the currentversion before use.

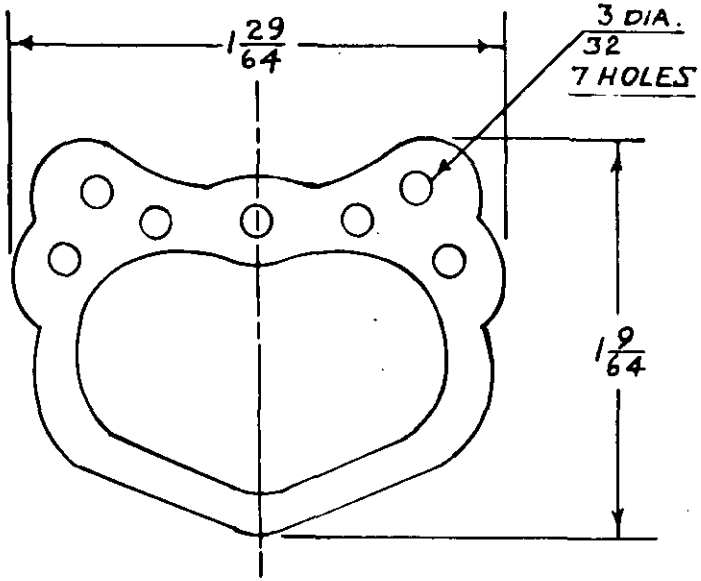

HOOK

FLAT (BEFORE FORMING)

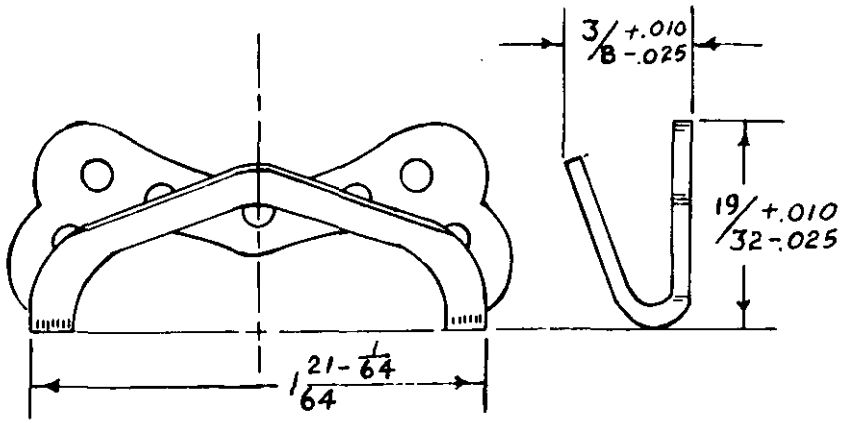


FORMED HOOK

MAT.—.050 H BRASS 4# HD.

FINISH— CLEAR LACQUER OVER BLACK CHEMICAL FINISH

TOLERANCES: UNLESS OTHERWISE SHOWN
DECIMAL ..... ± —
FRACTIONS ..... ±.010
ANGLE ..... ± —

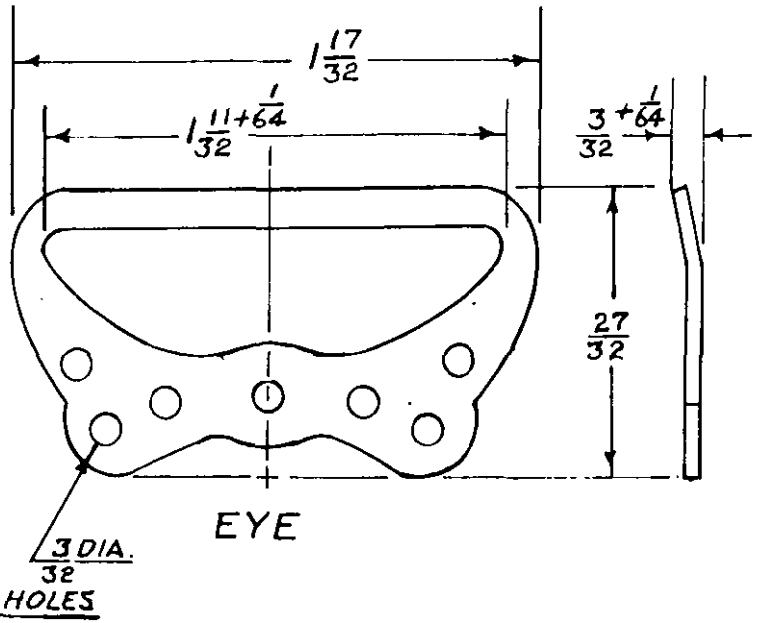

EYE

HOOK AND EYE

FIG. 1. COLLAR FOR CAPE MAN'S: U.S. MARINE CORPS BAND

M.C.S.A.
826: R.G.F.
28 Dec '70

Source: https://assist.dla.mil -- Downloaded: 2026/10-20T21:08Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:08Z
Check the source to verify that this is the current version before use.


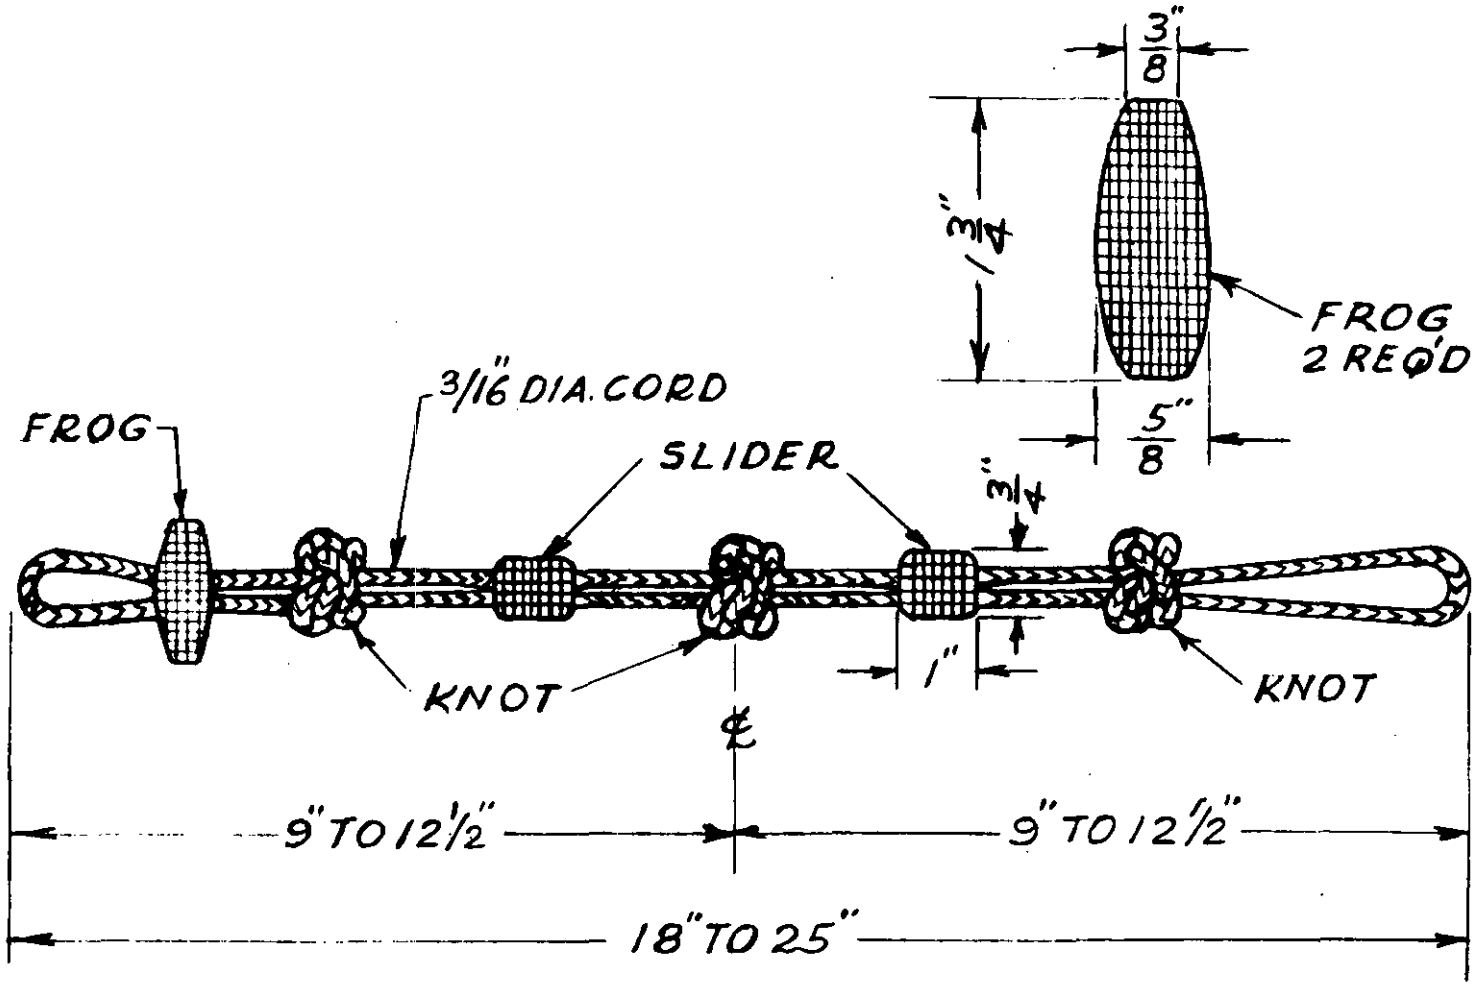


FIG. 2 AGRAFFE CORD FOR CAPE MANS: U.S. MARINE CORPS BAND

M.C.S.A
826: R.B.
28 Dec 70

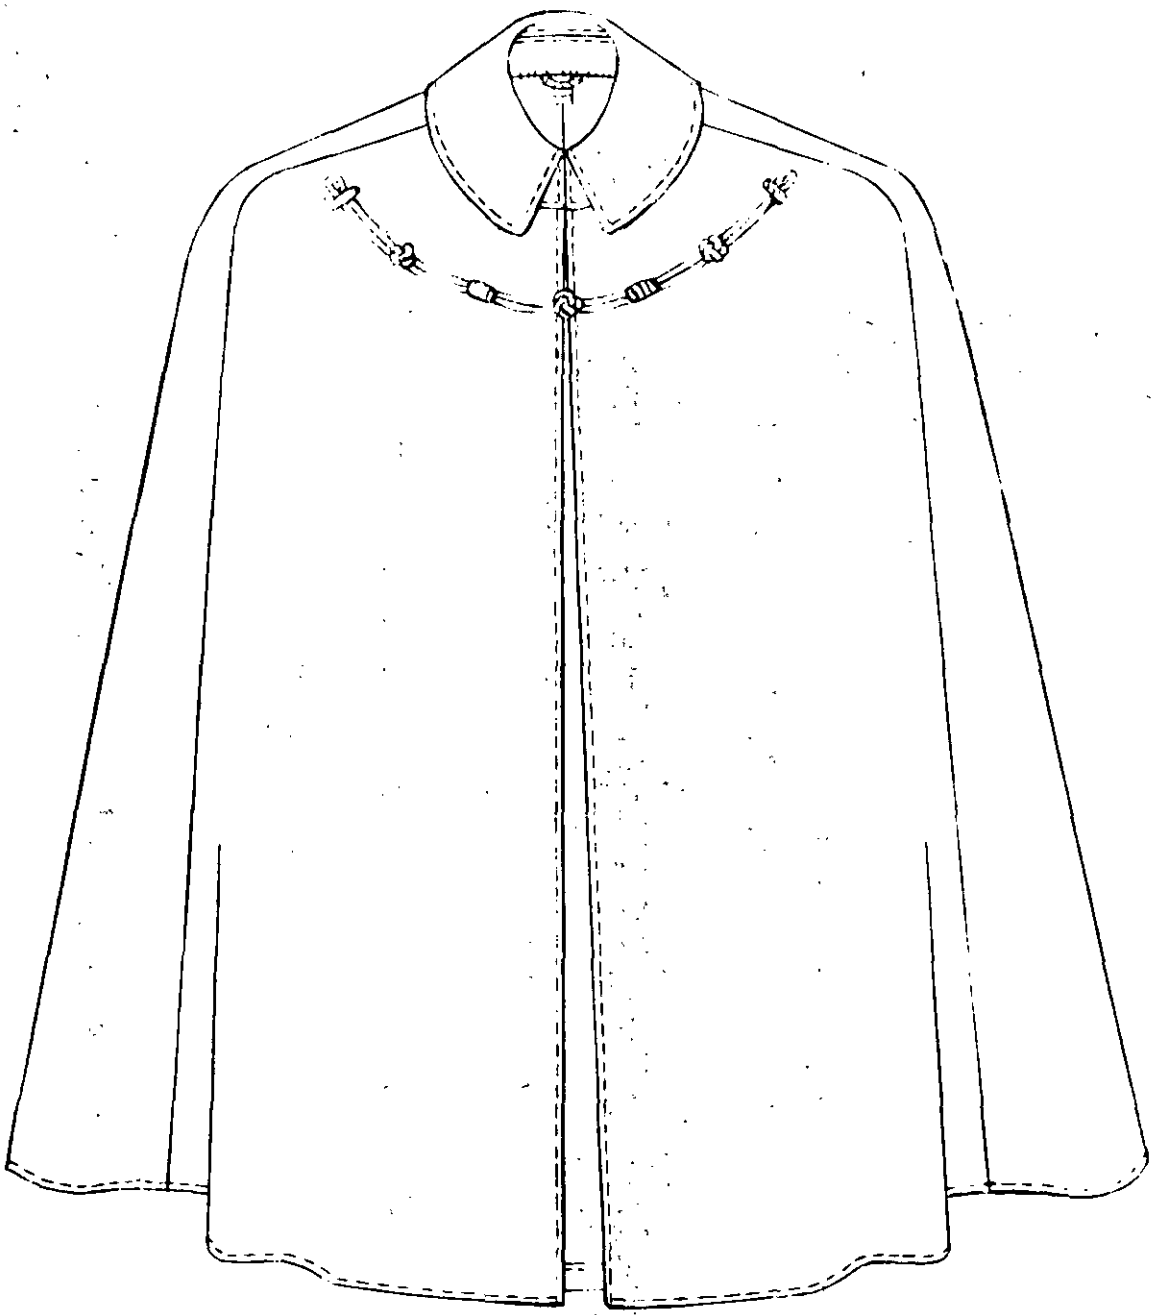


FRONT VIEW

FIG. 3. CAPE, MAN'S: U.S. MARINE CORPS BAND

M.C.S.A.
826 R.G.F.
28 Dec '70

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:08Z
Check the source to verify that this is the current version before use.

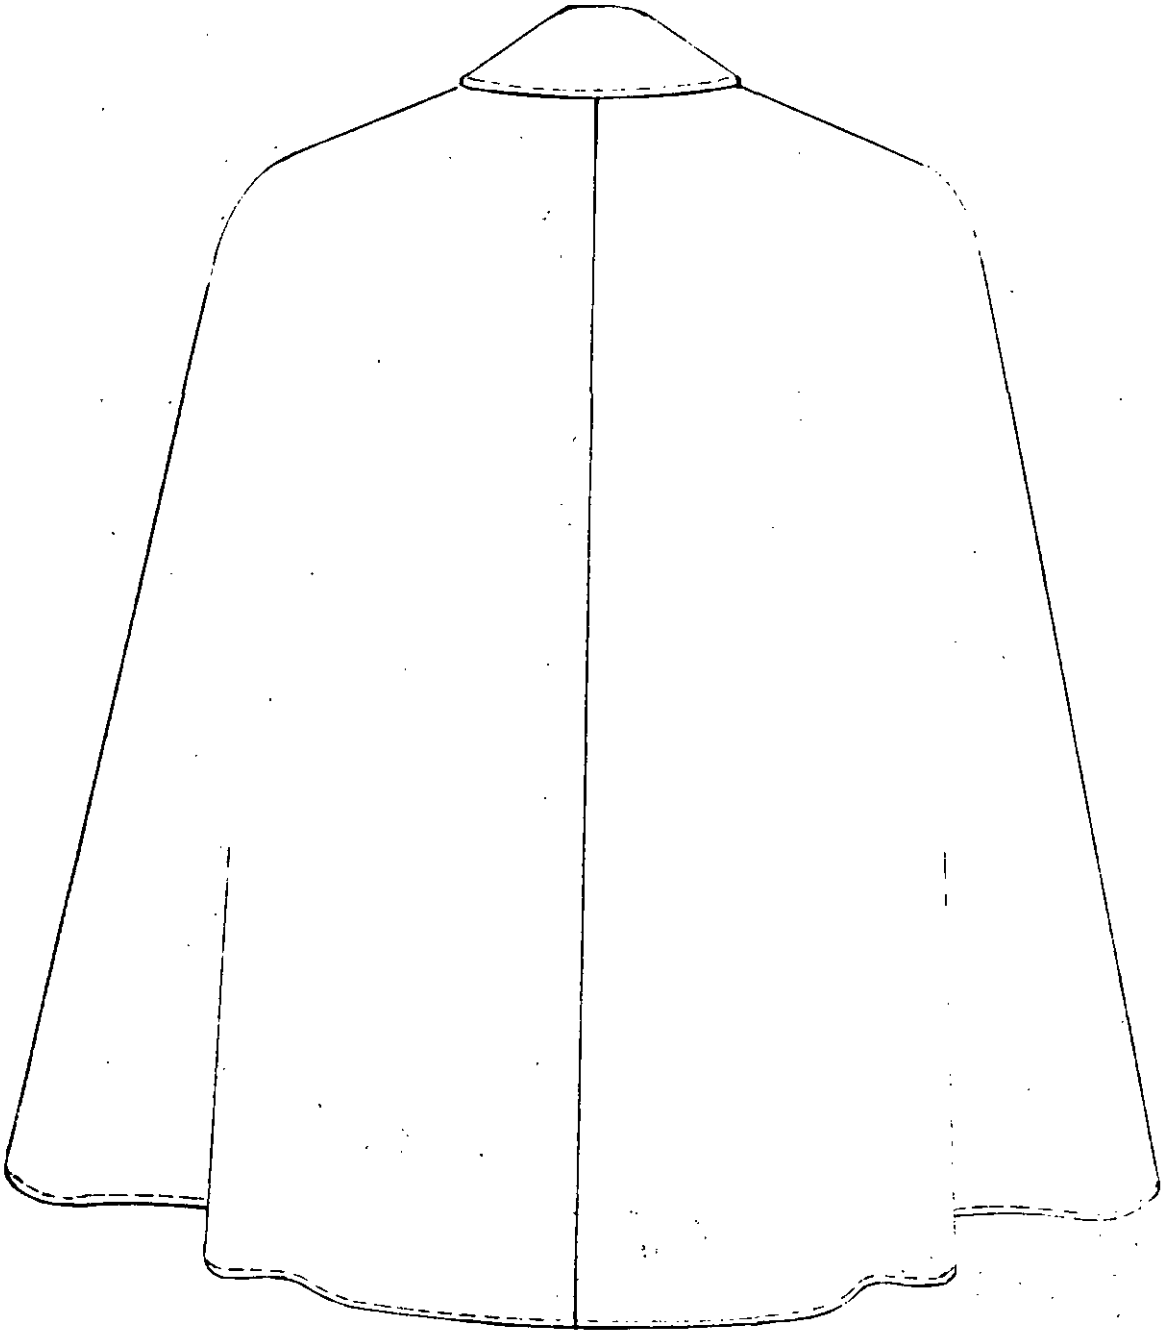


BACK VIEW

FIG.4. CAPE MAN'S: U.S. MARINE CORPS BAND

MCSA
826 R.G.F
28 Dec

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:08Z
Check the source to verify that this is the current version before use.

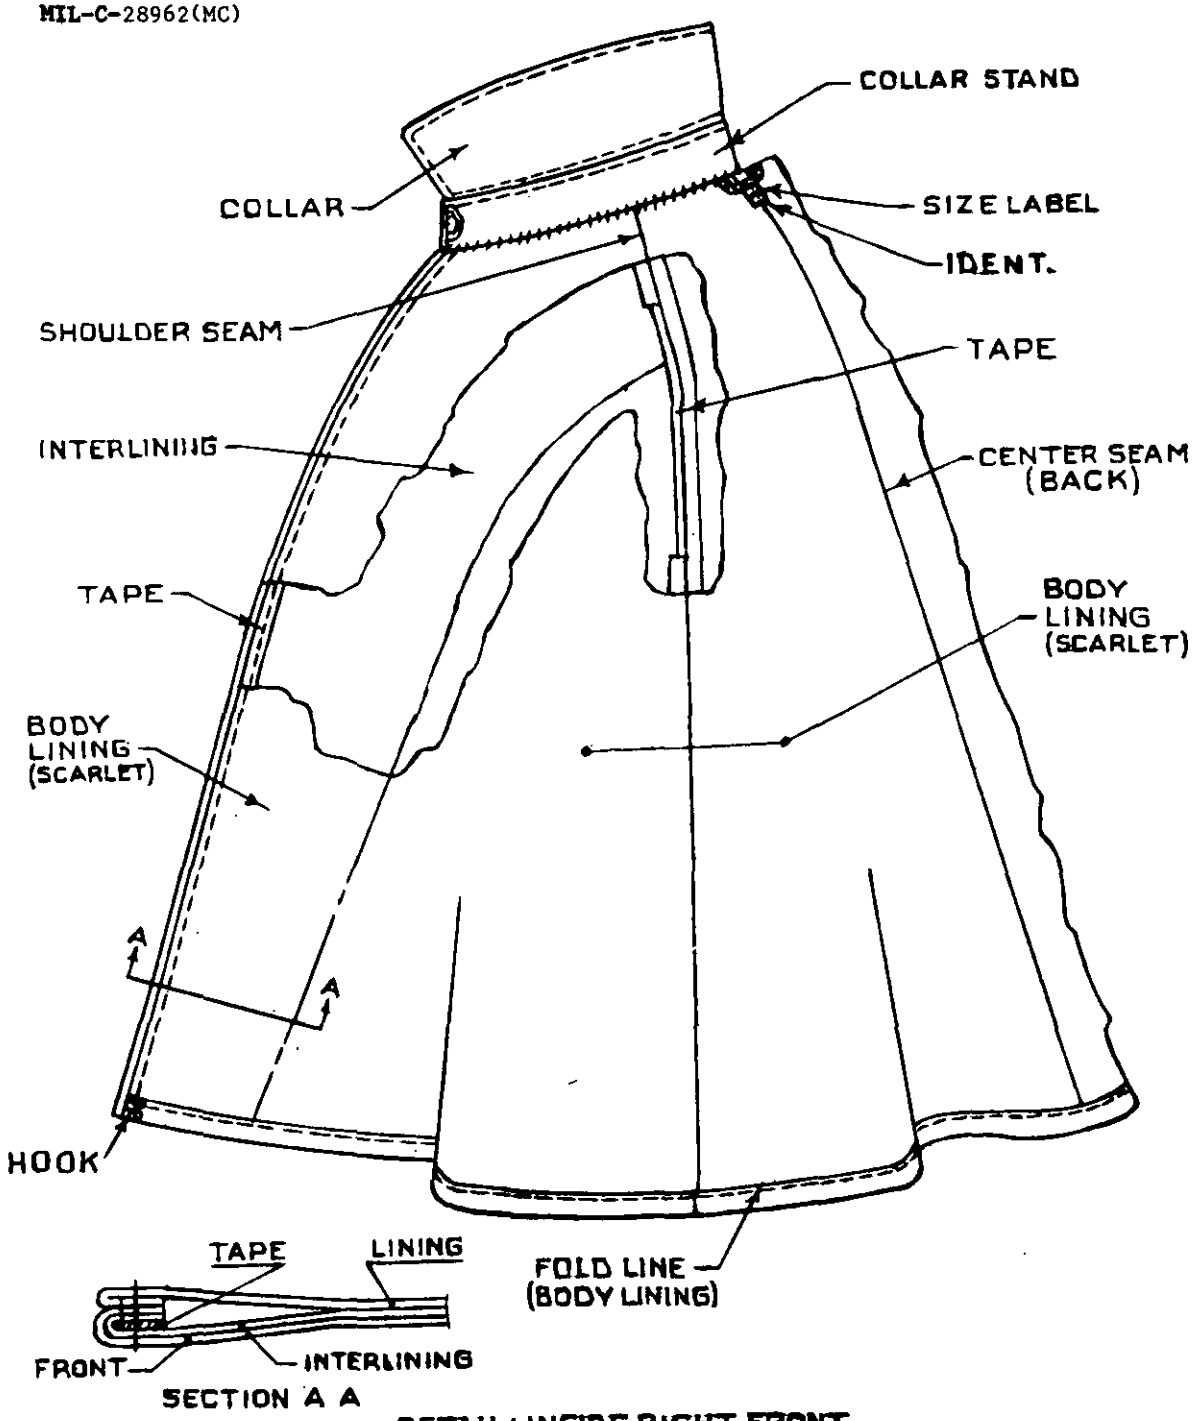

DETAIL: INSIDE RIGHT, FRONT

FIG. 5. CAPE, MAN'S: U.S. MARINE CORPS BAND

M.C.S.A. 28 Dec '70

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:08Z
Check the source to verify that this is the current version before use.

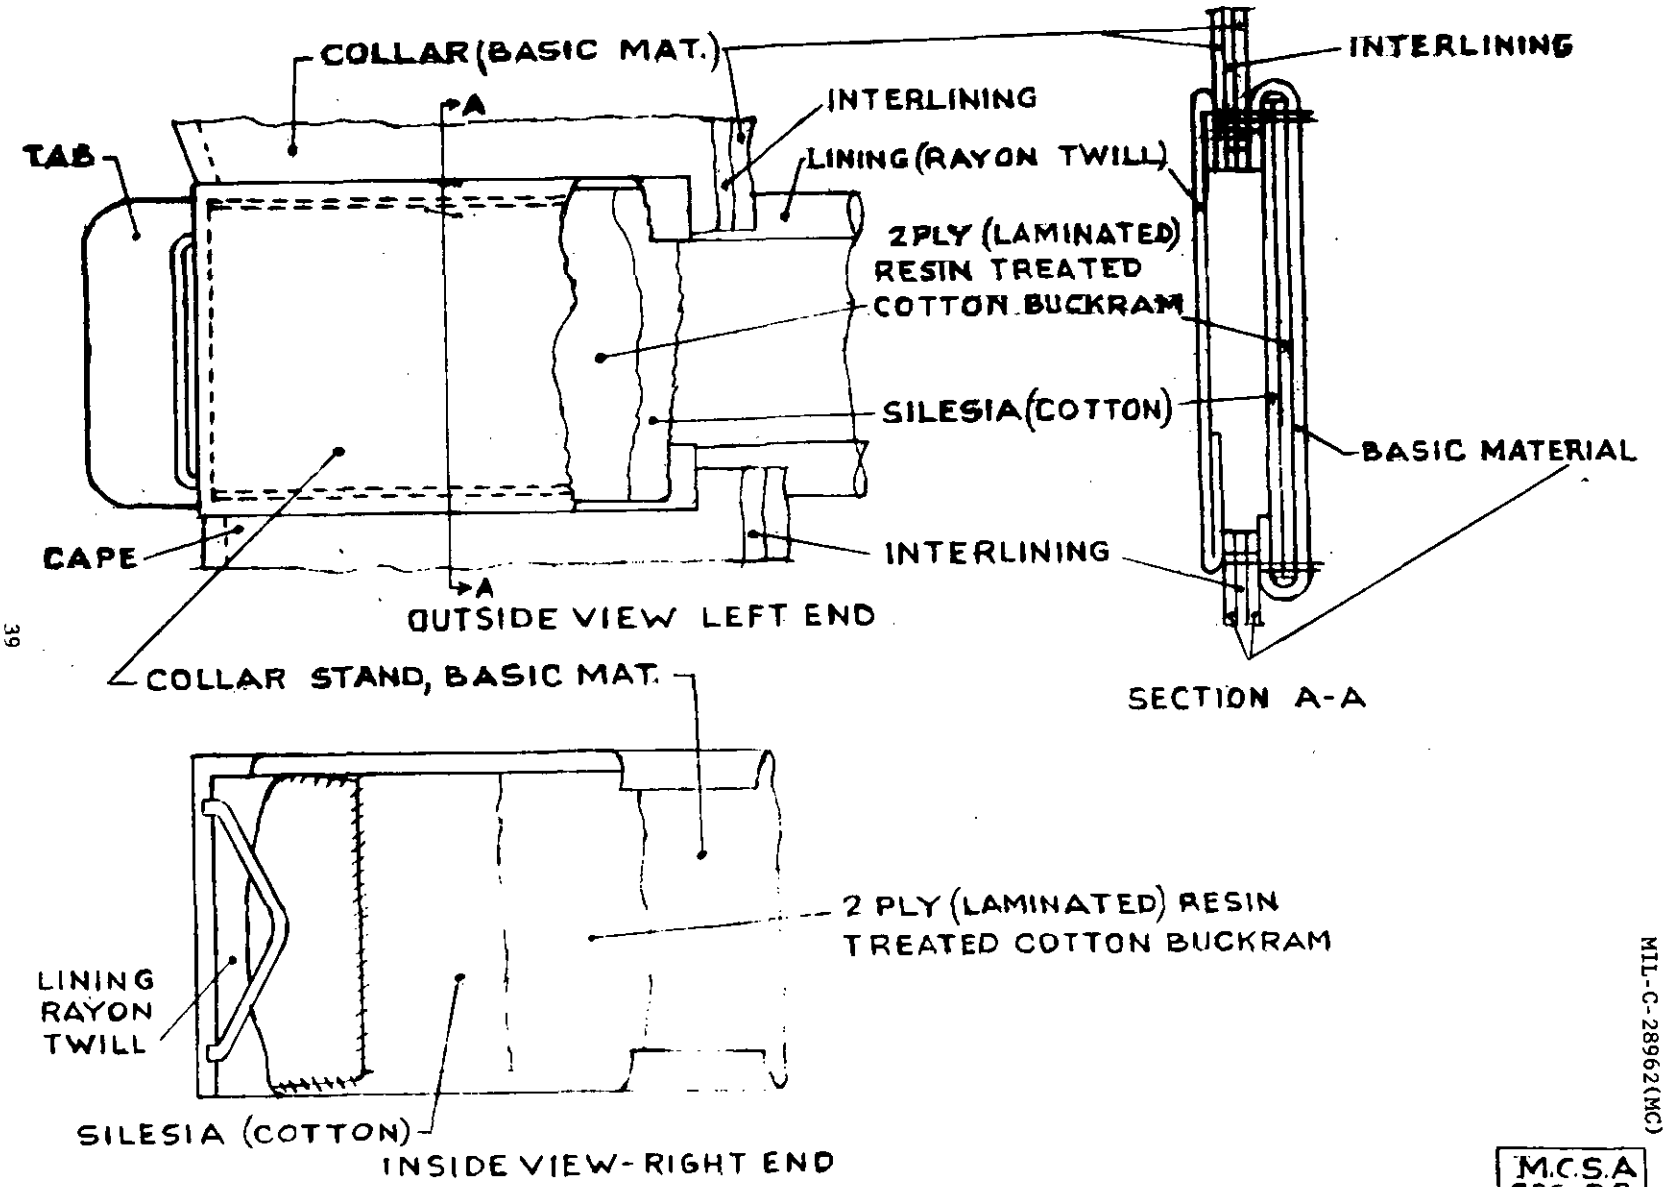


FIG. 6. COLLAR STAND FOR CAPE, MAN'S: U.S. MARINE CORPS BAND

M.C.S.A 826 R.B 28 Dec 70

MIL-C-28962(MC)

Source: https://assist.dla.mil -- Downloaded: 2026/0-20T21:08Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General (826)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:08Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:08Z
Check the source to verify that this is the current version before use.