INCH-POUND

MIL-DTL-28950D(MC)
29 May 2026
SUPERSEDING
MIL-DTL-28950C(MC)
8 October 1997

DETAIL SPECIFICATION

COAT, MAN'S – DRESS; BLUE (OFFICER'S)

This specification is approved for use by the United States Marine Corps and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a man's blue dress coat, with belt, worn by male officers of the United States Marine Corps.

1.2 Classification. The coat is of one type in the following sizes and lengths (see table I), as specified (see 6.2).

1.2.1 Schedule of sizes.

TABLE I. Schedule of sizes.

Short	Regular	Long	Extra Long
36	36	36	36
38	38	38	38
40	40	40	40
42	42	42	42
44	44	44	44
---	46	46	---

1.3 Individual orders. When the coat is custom tailored to an individual order, this specification will govern, except the finished measurements may be modified to the extent necessary for good custom tailoring practices.

Comments, suggestions, or questions on this document should be addressed to Marine Corps Systems Command, 2200 Lester Street, Quantico, VA 22134 ATTN: SEAL-MA-STDS or emailed to USMC_STDZ@usmc.mil. Since contact information can change, you may want to verify the currency of this address information using ASSIST at https://assist.dla.mil.

AMSC N/A FSC 8405

Distribution Statement A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

2. APPLICABLE PUBLICATIONS

2.1 General. The publications listed in this section are specified in sections 3 and 4 of this specification. This section does not include publications cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, users of this document are cautioned that they must meet all specified requirements of publications cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government publications.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these publications are those cited in the solicitation or contract.

FEDERAL SPECIFICATIONS

C-F-206	-	Felt Sheet: Cloth, Felt, Wool, Pressed

COMMERCIAL ITEM DESCRIPTIONS

A-A-50067	-	Cloth, Flannel, Wool
A-A-50129	-	Cloth, Flannel, Lightweight
A-A-50198	-	Thread, Gimp, Cotton, Buttonhole
A-A-50199	-	Thread, Polyester Core, Cotton or Polyester Covered
A-A-52071	-	Tape, Textile, Cotton, General Purpose
A-A-52105	-	Cloth, Interfacing, Cotton, or Synthetic Warp, and Spun Hair-Wool, Rayon or Synthetic Filling
A-A-59826	-	Thread, Nylon
A-A-59992	-	Cloth, Interfacings: Woven, Cotton, and Synthetic
A-A-59994	-	Button, Sewing Hole, and Button, Staple (Plastic)

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-371	-	Braid, Textile, Tubular
MIL-DTL-495	-	Finish, Chemical, Black, for Copper Alloys
MIL-DTL-3461	-	Buttons, Insignia, Metal, Uniform and Cap
MIL-DTL-3738	-	Cloth, Elastique, Wool
MIL-DTL-10176	-	Cloth, Gabardine: Wool, Polyester and Wool
MIL-DTL-15040	-	Labels, Garment (Woven, Rayon)
MIL-DTL-15064	-	Pads, Shoulder and Sleeve-Head
MIL-C-15065	-	Coat Fronts
MIL-DTL-32075	-	Label: For Clothing, Equipage, and Tentage (General Use)
MIL-C-44296	-	Cloth, Fusibles

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-1490	-	Provisions for Evaluating Quality of Coats, Men's Dress

(Copies of these publications are available online at https://quicksearch.dla.mil.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

2.3 Non-Government publications. The following publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these publications are those cited in the solicitation or contract.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC TM8	-	Test Method for Colorfastness to Crocking: Crockmeter
AATCC TM15	-	Test Method for Colorfastness to Perspiration
AATCC TM20A	-	Test Method for Fiber Analysis: Quantitative
AATCC TM132	-	Test Method for Colorfastness to Drycleaning
AATCC TM158	-	Test Method for Dimensional Changes on Drycleaning in Perchloroethylene: Machine Method

(Copies of these publications are available online at www.aatcc.org.)

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ/ANSI Z1.4	-	Sampling Procedures and Tables for Inspection by Attributes

(Copies of this publication are available online at https://asq.org.)

ASTM INTERNATIONAL

ASTM D1777	-	Standard Test Method for Thickness of Textile Materials
ASTM D3775	-	Standard Test Method for End (Warp) and Pick (Filling) Count of Woven Fabrics
ASTM D3776/D3776M	-	Standard Test Methods for Mass Per Unit Area (Weight) of Fabric
ASTM D5034	-	Standard Test Method for Breaking Strength and Elongation of Textile Fabrics (Grab Test)
ASTM D6193	-	Standard Practice for Stitches and Seams

(Copies of these publications are available online at www.astm.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Inspections.

3.1.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.1.2 Conformance inspection. When specified (see 6.2), a sample shall be subjected to conformance inspection in accordance with 4.4.

3.2 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous lifecycle costs.

3.3 Design. The coat, a five-button, single-breasted, fully lined coat with separate belt, uses the U.S. Marine Corps design shown on figures 1, 2, 3A, and 3B. The coat has a skirt-type front with side body pieces, waist seam and waist darts, and a four-piece back with lined vent. The coat has upper patch pockets and lower bellows pockets with worked eyelets for detachable insignia buttons and with flaps to button, and one inside breast pocket with vertical -piped opening. Lower corners of upper pocket flaps may be secured with snaps or sewn down. The sleeves have ornamental cuffs. The coat has shoulder straps with buttons and a stand-up collar with a single hook

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

and eye for front closure. The inside of the collar has a lining covering the hook and eye and sewn buttons for the attachment of a collar strip.

3.3.1 Figures. Figures 1 through 12 are provided for informational purposes only. When inconsistencies exist between the written specification and figures, the written specification shall govern.

3.4 Materials and components.

3.4.1 Basic material. The basic material for the coat shall be a polyester/wool gabardine, dark blue shade 2312, conforming to MIL-DTL-10176, type II, class 12, when tested in accordance with 4.6.1.

3.4.1.1 Alternate basic material. As an alternate, the coat may be made from a wool elastique cloth, 16 ounces per linear yard, dark blue shade 2309, conforming to MIL-DTL-3738, type III, when tested as specified in 4.6.1.

3.4.2 Lining. The material for lining the coat, standard belt, pocket flaps, collar and vent; for making the belt fastener; and for the facing of the inside pocket shall be an acetate lining material, twill or satin (alternate) weave, conforming to the requirements specified in table II when tested as specified in 4.6.1.

TABLE II. Lining requirements.

Characteristic	Twill requirement	Satin requirement
Shade	Black or good match to basic material	
Fiber identification	Acetate	
Yarns per inch (minimum)		
Warp	120	288
Filling	68	68
Weight, ounces per square yard (minimum)	3.8	4.9
Breaking strength, pounds (minimum)		
Dry: Warp	74	83
Dry: Filling	49	117
Wet: Warp	54	54
Wet: Filling	34	77
Colorfastness to perspiration, rating (minimum) (see 6.7)		
Color change	5	5
Staining on cotton	3.5	5
Staining on wool	4.5	5
Colorfastness to dry cleaning, rating (minimum) (see 6.7)		
Color change	4.5	5
Staining on cotton	4.5	5
Staining on wool	4.5	5
Colorfastness to crocking, wet and dry, rating (minimum)	3.0	4.5
Dimensional stability to dry cleaning, percent (maximum)		
Individual sample unit	±3.5	±3.5
Lot average	±3.0	±3.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

3.4.3 Under collar cloth. The collar tab shall be made of wool flannel, under collar cloth, conforming to A-A-50067. The color of the cloth shall match the basic material of the coat (see 6.3).

3.4.4 Bias binding. The binding for the upper edge of the front pockets, the back edge of the facings, the raw edge of the button turnup, and the raw edge of seam allowances shall be bias-cut out of the lining material specified in 3.4.2. The bias binding for the seams, facings, and bottom turnup shall be 3/4 inch wide, and the bias binding for the top edge of pockets shall be 1-1/8 inches wide. The binding shall have sized edges. Armhole binding shall be cut 3/4 to 1 inch wide.

3.4.5 Polyester twill. The material for making the inside breast pocket, stay pieces for the front pockets, stays for the armhole and shoulder seams and the lower edge of armhole, inside pocket support, collar interlining, and the reinforcement pieces for the upper front pocket snap fasteners (if used) shall be cloth, polyester twill, conforming to A-A-52106, class 1. The polyester twill shall be black.

3.4.6 Belt interfacing. The material for interfacing the standard belt shall be cloth, cotton, buckram, natural color, conforming to A-A-50186, type I.

3.4.7 Collar interfacing. The material for interfacing the collar shall be cloth, cotton, buckram, double texture, laminated, starch finish, natural color, conforming to A-A-59992, type III, class 7. The weight of the finished laminated cloth shall be 21 to 23 ounces per square yard.

3.4.8 Coat fronts and chest pieces. The coat fronts and chest pieces shall conform to the following requirements. Figure 12 is provided for information and guidance only.

3.4.8.1 Basic material for coat fronts. The basic material for the coat fronts shall be cotton warp and hair-wool filling interfacing cloth meeting the requirements of A-A-52105, type II, dyed black.

3.4.8.2 Haircloth. The 2-ply cotton warp and natural horsehair filling cloth and the polyester twill cloth for the stays shall be dyed black. The dyed polyester twill shall show fastness to dry cleaning only. The cotton warp, hair filling cloth shall be dyed black, shall have not less than 60 ends and 40 picks per inch, shall weigh not less than 4.5 ounces per square yard, and shall contain no sizing.

3.4.8.3 Polyester and cotton cloth. The polyester and cotton cloth for stays, chest piece bottom covering, and top front corner reinforcement covering shall meet the requirements of A-A-52105, type II, undyed.

3.4.8.4 Padding. The padding for the chest shall be either felt or flannel. The felt shall be pressed wool conforming to C-F-206, type III (roll felt), classification 11A2. The flannel shall be unbleached, double-napped, conforming to A-A-50129. As an alternate, needle punch fabric with similar thickness and weight properties as those specified for felt is permitted.

3.4.8.5 Fusible for coat fronts and back vent (alternate). The coat front and vent may be fused using a woven twill cloth conforming to MIL-C-44296, type II, style B, class 1, in black or charcoal gray shade.

3.4.9 Shoulder pads. The shoulder pads shall conform to MIL-DTL-15064, type I, class 2.

3.4.10 Sleeve-head pads. The sleeve-head pads shall conform to MIL-DTL-15064, type IV.

3.4.11 Hanger braid. The braid for the hanger loop shall be black cotton tubular flat braid, 1/8 to 3/16 inch wide, with a minimum breaking strength of 50 pounds, conforming to MIL-DTL-371, type VIII, class 1.

3.4.12 Tape, cotton. The cotton tape shall conform to A-A-52071, type II, class 1; shall be 1/4 inch wide for armholes, back vent, and waist seam; and shall be 3/8 inch wide for front edges of coat.

3.4.13 Thread. The threads used in the construction of the coat shall conform to the requirements of the thread commercial item descriptions cited in table III when tested as specified in 4.5.1. The threads shall match the shade requirements specified in table III. The shade of the basic material can be found in 3.4.1.

3.4.13.1 Colorfastness. All threads, except the thread used for basting, shall show colorfastness to light, perspiration, and dry cleaning equal to or better than “3-4” when tested as specified in 4.6.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE III. Thread requirements.

Use (seam type)	Description	Document	Tex	Ply	Shade
Seaming (301)	Cotton-covered polyester core	A-A-50199, type I	36-45 for needle and bobbin	2	Good match to the shade of the basic material
Seaming (401)	Cotton-covered polyester core	A-A-50199, type I	36-45 for needle	2	Good match to the shade of the basic material
			31-35 for looper	2	
Overedging (504 and 505)	Cotton-covered polyester core	A-A-50199, type I	31-35 for needle and looper	2	Good match to the shade of the basic material
Raise, edge, and topstitching	Cotton-covered polyester core	A-A-50199, type I	36-45 for needle and bobbin	2	Good match to the shade of the basic material
Buttonholes	Nylon, twisted, soft finish	A-A-59826, type I, class A	45-46	2 or 3	Good match to the shade of the basic material
			90-101	3 or 4	
Buttonhole reinforcement	Cotton gimp	A-A-50198, type I or II soft or glazed finish	210	--	Black, shade AA, cable No. 66043 showing good fastness to dry cleaning
Buttons	Cotton-covered polyester core	A-A-50199, type I	61-70	2 or 3	Good match to the shade of the basic material
Snap fasteners	Cotton-covered polyester core	A-A-50199, type I	36-45	2	Good match to the shade of the basic material
Eyelets	Nylon, twisted, soft finish	A-A-59826, type I, class A	45-46	2 or 3	Good match to the shade of the basic material
Felling	Nylon, tailoring, twisted multiple cord, soft finish	A-A-59826, type VI	24	2 or 3	Good match to the shade of the basic material
Machine tacking armholes	Cotton-covered polyester core	A-A-50199, type I	61-70	2 or 3	Good match to the shade of the basic material
Tacking (103 or hand)	Cotton-covered polyester core	A-A-50199, type IV	36-45	2	Good match to the shade of the basic material
			31-35	2	
Basting	Cotton-covered polyester core, nylon, or monofilament synthetic				White or clear

3.4.14 Buttons.

3.4.14.1 Insignia buttons. The insignia buttons shall be metal, gold-plated, officer design, 27-ligne and 40-ligne, regular shank conforming to MIL-DTL-3461, type I, style 4, class A, subclass 1. Ring toggles for securing buttons to pockets shall conform to MIL-DTL-3461. Insignia buttons shall be attached in such a way that the head of the eagle is upright (±20 degrees) on all locations, except for the shoulder straps, and towards the collar (±20 degrees) on the shoulder straps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

3.4.14.2 Sewing hole buttons. The sewing hole buttons shall be melamine formaldehyde composition, glossy finish, conforming to A-A-59994, type I, class A. The color shall be white style 25, 16-ligne for the collar; black style 4, 22-ligne for the belt; and black style 20, 34-ligne for the bottom button of the front closure.

3.4.15 Fasteners, snap. The snap fasteners for the upper pockets and flaps (if used) and for the belt shall be brass, black japanned finish or black chemical finish in accordance with MIL-DTL-495, followed by clear lacquer coating, round or square style, rolled edge, size 1/0, sew-on type.

3.4.16 Collar closure hook and eye. The hook and eye closure for the collar shall meet the requirements of table IV and shall have the appearance and the dimensions specified in figure 4. A known source for a hook and eye closure that has been found to be acceptable for use on the end item is provided in 6.5.

TABLE IV. Collar closure hook and eye requirements.

Characteristic	Requirement
Material	Cartridge Brass 70/30 (UNS Alloy C27000)
Color/finish	Dull flat black
Coating type	Lacquer, clear, commercial grade
Coating application	Continuous, level, and adherent
	Completely coating the hook and eye
	Free from lint, dust, or other foreign inclusions
Coating tackiness	No tackiness
Attachment holes	Completely open, free of any lacquer or black finish
Edges and surfaces	Clean and smooth
	Free from burrs and tool marks
	No sharp edges or roughness

3.4.17 Labels. Each coat shall have an identification label and size label conforming to 3.4.17.1 through 3.4.17.3. The coat is intended to be dry-cleaned, and the labels shall show fastness to dry cleaning.

3.4.17.1 Identification label. The identification label shall be MIL-DTL- 32075, type VI, class 1, and shall measure not less than 2-1/2 by 1-1/2 inches. The content and format shall be as follows:

Nomenclature:

Contract number:

Name of contractor:

Wool Product Act information:

NOTE: Size of characters for “Name of contractor” shall be a minimum 8 point (approximately 3/32 inch).

3.4.17.2 Size label. The size label shall be MIL-DTL-32075, type VI, class 2, and shall measure not less than 1-1/2 inches by 1 inch. The label shall consist of the numerical size designation specified in 1.2 followed by the letters S (short), R (regular), L (long), XL (extra long), as shown by the following example:

40 R

3.4.17.3 Woven instruction label. The woven instruction label shall conform to MIL-DTL-15040, type II, size C. The content and format shall be as shown in figure 5. The letters for the caption shall be not less than 5/32 inch in height, and all other letters and figures shall not be less than 1/8 inch in height.

3.5 Patterns. Standard patterns shall be furnished to the contractor by the Government (see 6.2). The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor’s working patterns. The contractor’s working patterns shall be identical to the standard patterns. The standard patterns provide

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

3/16-inch allowance for seams at the top and front edges of coat, and for pocket flap and shoulder strap seams; 3/4-inch allowance for side seams; 5/8-inch allowance for center back seam; and 3/8-inch allowance for all other seams, except as otherwise specified in appendix A. Standard patterns show size, seam allowances, and directional lines for cutting, and are marked or notched for proper placement and assembly of the component parts.

3.5.1 List of pattern parts. Coats shall be cut from the materials specified herein in accordance with the number of pattern parts indicated in table V.

TABLE V. List of pattern parts.

Material	Item	Cut Parts
Basic material (see 3.4.1)	Front, upper	2
	Front, lower	2
	Facing, right	1
	Side body (front)	2
	Facing, left	1
	Center back	2
	Side back	2
	Top sleeve	2
	Under sleeve	2
	Sleeve cuff	2
	Collar (outer ply)	1
	Shoulder strap, top ply	2
	Shoulder strap, under ply	2
	Pocket, upper	2
	Pocket, lower	2
	Pocket flap, upper	2
	Pocket flap, lower	2
	Belt	1
	Belt optional	1
Lining (see 3.4.2)	Front	2
	Yoke	1
	Top sleeve	2
	Under sleeve	2
	Pocket flap, upper	2
	Pocket flap, lower	2
	Inside breast pocket facing	2
	Collar lining	1
	Belt lining	1
Under collar cloth (see 3.4.3)	Collar tab	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE V. List of pattern parts – Continued.

Material	Item	Cut Parts
Polyester twill (see 3.4.5)	Inside breast pocket	2
	Stay, snap fastener	4
	Stay, upper pocket	2
	Stay, lower pocket	2
	Collar interlining	1
Collar interfacing (see 3.4.7)	Collar interlining	1
Belt interfacing (see 3.4.6)	Belt interlining	1
Shapers	Finished pocket shaper, upper	1
	Finished pocket shaper, lower	--
	Finished pocket flap shaper, upper	--
	Finished pocket flap shaper, lower	--
	Left vent shaper	--
Marker	Sleeve cuff marker	--

3.6 Construction. The coats should be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in appendix A. The contractor is not required to follow the exact sequence of the operations as listed in appendix A; however, the finished coat shall meet the appearance descriptions specified in 3.6.1.4 and the same performance as a coat made in accordance with the operations specified in appendix A.

3.6.1 Stitches, seams and stitching. The stitch, seam, and stitching types specified in appendix A conform to ASTM D6193. The number of stitches per inch shall be as specified in appendix A. All overedge stitching shall be performed on serging machines with a knife attachment properly set to trim the raw edge without cutting the material. All thread ends shall be trimmed to a length of 1/4 inch or less.

3.6.1.1 Tacking and backstitching. Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitches, shall be backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break line not less than 1/2 inch.

3.6.1.2 Shade markings. The component parts of the coat cut from one piece of basic material, and lining material, including pairs of sleeve linings when cut from ends, shall be shade marked to ensure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

a. Corrosive metal fastening devices.

b. Sew-on shade tickets.

c. Adhesive type tickets that show discoloration or leave traces of paper or adhesive on the material upon removal of the tickets.

3.6.1.3 Construction operations. Appendix A includes a recommended procedure for assembly of the coat.

3.6.1.4 Finished appearance. The finished coat shall have the following appearance attributes:

a. The belt loops and keeper shall finish 1/2±1/8 inch wide and smooth and flat.

b. Each shoulder strap shall finish smooth and flat and shall be in accordance with the shoulder strap finished shaper. The pair of shoulder straps shall be uniform in appearance.

c. The one-piece belt shall finish smooth and flat, without twists, pleats, puckers, or raw edges. The pointed end of the belt shall be well-formed. The snap fastener shall be securely attached to the belt. The stitching shall not show on the outside of the belt. The finished width of the belt shall be 1-3/4+1/16, -1/8 inches.

d. The completed collar shall finish smooth and flat without distortion. The edges shall be uniformly even. The edge stitching shall be uniform.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

e. The forearm and back arm seams shall finish smooth and flat without twists, gathers, puckers, or pleats and shall start and finish evenly.

f. The sleeve lining shall be properly positioned and shall finish smooth and flat without twists, pleats, puckers, or gathers. The seams shall start and finish evenly.

g. The sleeve lining shall not be short, tight, or twisted at the bottom of sleeves.

h. The inside pocket shall be uniformly stitched and shall finish smooth and flat without causing any distortion.

i. The lining shall finish smooth and flat along the facing/lining joining seam without creases, bulges, overlapping of excess material, or other defect or distortion.

j. The armhole shields shall finish without puckers, gathers, or raw edges. The basic material and both edges of the binding shall be securely caught in the binding stitching.

k. The side and center back shall be joined without gathers, puckers, or pleats. The folded edge of the left vent shall be in vertical alignment with the center back seam. The left center back shall overlap the right center back not less than 2-3/4 inches when measured at the bottom edge of the coat.

l. The edge of the right side of the vent shall extend beyond the center seam allowance of the left back part.

m. The reinforcement stay pieces shall be sewn to the armhole and shoulder edge of the front without gathers, puckers, or pleats.

n. Each front shall consist of a front panel, a side front panel, and a side front dart panel. The panels shall be joined without gathers, puckers, or pleats.

o. The back and fronts shall be carefully joined at the sides without twists, gathers, puckers, or pleats.

p. The belt loops shall finish aligned with each side seam and measure 2+1/8, -0 inches long from the top to bottom folded edges.

q. The shoulder seam shall finish without a distorted appearance, with the front and back seam lines matching.

r. The shoulder straps shall be uniformly stitched to the coat without twists, fullness, or tightness. On the finished coat, the strap shall be 2-1/4±1/8 inches wide at the armhole seam and shall taper to 1-3/4±1/8 inches at the eyelet end of the buttonhole. The rounded end of the strap shall be 1/4 to 3/8 inch from the lower edge of the collar in the finished coat.

s. The neckline shall finish smooth and flat without twists, pleats, or puckers. The size label shall be centered between the ends of the hanger loop. In the finished coat, the hanger loop opening shall be 2±1/8 inches long when measured along the lower edge of the collar lining.

t. The collar shall be carefully joined to the coat without twists, puckers, pleats, raw edges, or distortion.

u. The coat shall be uniformly edge stitched without distortion. The stitching shall be uniformly 1/8 inch from the edge.

v. The armhole sleeve seam shall finish smooth and flat without twists, gathers, puckers, or pleats. The front edge of the sleeve shall crease at the sleeve bottom and shall finish 1 inch in front of the front/side front seam.

w. The sleeve armhole shall not be distorted or puckered due to stretching of the sleeve head pads and lining at the armhole.

x. The front buttonholes shall be eyelet end, square bar, cut first type. The buttonholes shall be clean cut, well worked over gimp, with the stitching of the buttonhole securely caught in the basic material. The purling of the buttonhole shall finish on the outside. The buttonhole shall finish clean and shall be positioned according to the pattern marks. The inside edge of the eyelet end of the buttonhole shall be 5/8±1/16 inch from the front edge.

y. The hook and eye shall be positioned to properly engage each other, effecting a flat, smooth closure at the front of the collar without misalignment.

z. The coat shall be well pressed throughout with a heated pressing iron or pressing machine to obtain the desired shape and appearance in accordance with good manufacturing practices, ensuring no shine or gloss.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

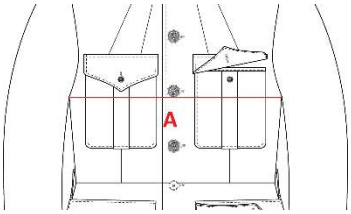
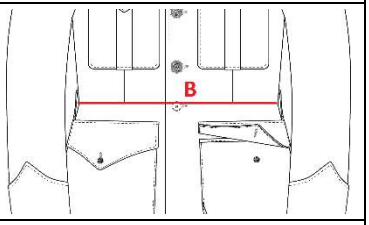
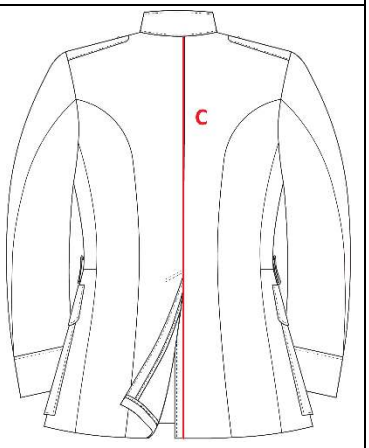

3.7 Finished measurements. The finished measurements shall conform to the measurements shown in table VI, table VII, and table VIII when measured as specified in table VII. All measurements and tolerances are expressed in inches. For all sizes and lengths, the right forepart shall overlap the left forepart at the bottom. To measure the coat lying flat, match the side seams with the bottoms even. The left shall be 3-3/4±1/4 inches from the outer finished edge of the right front.

TABLE VI. Finished measurements.

Size	A: Half Chest	B: Half Waist	C: Back Length	D: Collar Length	E: Belt Length	F: Sleeve Length	G: Collar Height
36S	18-1/2	14-3/8	28-3/4	15-1/2	38-3/4	17	2
38S	19-1/2	15-3/8	29	16	40-3/4	17	2
40S	20-1/2	16-3/8	29-1/4	16-1/2	42-3/4	17	2
42S	21-1/2	17-3/8	29-1/2	17	44-3/4	17	2
36R	18-1/2	14-3/8	29-3/4	15-1/2	38-3/4	18	2
38R	19-1/2	15-3/8	30	16	40-3/4	18	2
40R	20-1/2	16-3/8	30-1/4	16-1/2	42-3/4	18	2
42R	21-1/2	17-3/8	30-1/2	17	44-3/4	18	2
44R	22-1/2	18-3/8	30-3/4	17-1/2	46-3/4	18	2
46R	23-1/2	19-38	31	18	48-3/4	18	2
36L	18-1/2	14-3/8	30-3/4	15-1/2	38-3/4	19	2
38L	19-1/2	15-3/8	31	16	40-3/4	19	2
40L	20-1/2	16-3/8	31-1/4	16-1/2	42-3/4	19	2
42L	21-1/2	17-3/8	31-1/2	17	44-3/4	19	2
44L	22-1/2	18-3/8	31-3/4	17-1/2	46-3/4	19	2
46L	23-1/2	19-38	32	18	48-3/4	19	2
36XL	18-1/2	14-3/8	32-1/4	15-1/2	38-3/4	20	2
38XL	19-1/2	15-3/8	32-1/2	16	40-3/4	20	2
40XL	20-1/2	16-3/8	32-3/4	16-1/2	42-3/4	20	2
42XL	21-1/2	17-3/8	33-1/8	17	44-3/4	20	2
44XL	22-1/2	18-3/8	33-3/8	17-1/2	46-3/4	20	2
Tolerance	±3/4	±3/4	±1/2	±1/2	±1/2	±1/4	±1/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE VII. Methods of measure.

Letter	Measurement	Method 1/	Measurement Depiction
A	Half Chest	Measurement from folded edge to folded edge, in line with the pit of the armhole.	
B	Half Waist	Measurement at waist joining seam from folded edge to folded edge.	
C	Back length	Measurement along center back seam from outer collar seam to bottom of coat.	
D	Collar length	Measurement with the coat opened (unbuttoned), length from front edge to front edge at the center of the collar, taken on the inside of the collar.	No image available
E	Belt length	Measurement, with belt removed from the coat, from point to square end of belt along the center of belt.	No image available
F	Sleeve length	Measurement along inseam from pit of armhole to bottom edge of sleeve.	
G	Collar height	Measurement from top edge of collar to bottom edge of collar, taken on the outside of the collar.	

FOOTNOTE:

1/ Except for measurement D, the coat is buttoned and lays flat upon a table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE VIII. Pocket and flap measurements (inches). 1/

Size (Short, Regular, Long, Extra-Long)		36-38		40-42		44-46	
Pocket		**Upper**	**Lower**	**Upper**	**Lower**	**Upper**	**Lower**
Length of flap at center point		2-7/8	3-3/4	2-7/8	3-3/4	2-7/8	3-3/4
Length of flap at sides		2-1/8	2-1/4	2-1/8	2-1/4	2-1/8	2-1/4
Width of flap at top edge		4-3/4	7-3/4	5-1/4	8-1/4	5-3/4	8-3/4
Width of pocket at top edge, side to side		4-1/2	7-1/2	5	8	5-1/2	8-1/2
Width of pocket at bottom edge, side to side		4-7/8	10	5-3/8	10-1/2	5-7/8	11
Length of pocket, top edge to bottom edge							
Coat length	Short	6	10-1/2	6-1/4	10-1/2	6-1/4	10-1/2
	Regular	6	10-3/4	6-1/4	10-3/4	6-1/4	10-3/4
	Long	6	11	6-1/4	11	6-1/4	11
	Extra Long	6	11-3/4	6-1/4	11-3/4	6-1/4	11-3/4

FOOTNOTE:
1/ Tolerance on all measurements is ±1/8 inch.

3.8 Workmanship. The finished coat shall conform to the quality of product established by this document. Defects shall not exceed the established acceptance quality limits (AQL) (see 6.2) and shall not adversely affect the serviceability, appearance, and uniformity of the product.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Conformance inspection (see 4.4).

4.2 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be performed in accordance with the test conditions specified in MIL-STD-1490.

4.3 First article inspection. First article inspection shall be performed when a first article sample is required (see 3.1.1) in accordance with the inspection conditions of 4.2 and the material and component sampling of 4.5.1 through 4.5.3. This inspection shall include the examinations and tests of 4.6.1 through 4.6.4 for compliance with design, configuration, workmanship, and dimensional requirements specified in this document.

4.4 Conformance inspection. Conformance inspection shall be performed when specified (see 6.2) in accordance with the inspection conditions of 4.2 and the material and component sampling of 4.5.1 through 4.5.3. This inspection shall include the examinations and tests of 4.6.1 through 4.6.4 for compliance with design, configuration, workmanship, and dimensional requirements specified in this document.

4.5 Sampling and acceptance criteria.

4.5.1 Material sampling and acceptance criteria. Unless otherwise specified in referenced documents or procurement documents (see 6.2), sampling shall be in accordance with table IX. Acceptance criteria shall be as specified in the contract or order (see 6.2).

TABLE IX. Material sampling.

Lot size	Sample size (sample unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

4.5.2 Component sampling and acceptance criteria. Unless otherwise specified in referenced documents or procurement documents (see 6.2), the unit for expressing lot size and sample unit for testing each component shall be in accordance with the applicable referenced document and table X. The component lot shall be unacceptable if one or more sample units fail to meet any examination or test requirements specified in this document.

TABLE X. Component sampling.

Component	Lot size expressed as	Sample unit for testing
Lining	Yards	3 yards full width
Collar padding	Yards	1/4 yard full width
Collar closure hook and eye	100 (each)	2 (each) hook and eye
Snap fastener	100 (each)	2 (each) male and female

4.5.3 End item sampling and acceptance criteria. Unless otherwise specified in the contract (see 6.2), sampling for inspection shall be performed in accordance with ASQ/ANSI Z1.4. The sample unit shall be one finished coat. The lot size shall be expressed in units of coats. The presence of excessive defects or failure of any testing as specified (see 6.2) shall be cause for rejection of the lot.

4.6 Inspection methods.

4.6.1 Component and material examinations and tests. Components and materials shall be examined and tested in accordance with the examinations and tests specified in tables XI through XV, unless otherwise excluded, amended, or modified in this document or applicable procurement documents (see 6.2).

TABLE XI. Component and material verification.

Material	Requirement	Verification
Basic material	3.4.1	MIL-DTL-10176
Alternate basic material	3.4.1.1	MIL-DTL-3738
Lining	3.4.2	As listed in table II
Collar tab	3.4.3	A-A-50067
Armhole shield binding	3.4.4	As listed in table XII
Inside breast pocket and stay pieces	3.4.5	A-A-52106
Belt interfacing	3.4.6	A-A-50186
Collar buckram	3.4.7	A-A-59992
Floating chest piece: haircloth	3.4.8.2	MIL-C-15065
Floating chest piece: chest piece padding	3.4.8.4	As listed in table XVI
Fusible interfacing: front and side panels, center back neck and center vent (woven or weft knit)	3.4.8.5	MIL-C-44296
Shoulder pads	3.4.9	MIL-DTL-15064
Sleeve head pads	3.4.10	MIL-DTL-15064
Hanger braid	3.4.11	MIL-DTL-371
Tape: woven tape	3.4.12	A-A-52071
Tape: fusible tape	3.4.12	MIL-C-44296

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XI. Component and material verification - Continued.

Material	Requirement	Verification
Threads	3.4.13	Per specific thread specification listed in table III
Thread, shade	3.4.13	Visual 1/
Thread, colorfastness (black threads only)	3.4.13.1	Per specific thread specification listed in table III
Buttons: insignia buttons	3.4.14.1	MIL-DTL-3461
Buttons: sewing hole for collar	3.4.14.2	A-A-59994
Buttons: sewing hole for belt	3.4.14.2	A-A-59994
Fastener, snap	3.4.15	As listed in table XV
Collar closure hook and eye	3.4.16	As listed in table XIV
Identification label	3.4.17.1	MIL-DTL-32075
Size label	3.4.17.2	MIL-DTL-32075
Woven label	3.4.17.3	MIL-DTL-15040

FOOTNOTE:
1/ Results reported as pass or fail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XII. Lining verification.

Characteristic	Requirement	Verification
Shade	3.4.2	Visual 1/
Fiber identification	3.4.2	AATCC TM20A
Yarns per inch: warp and filling	3.4.2	ASTM D3775
Weight	3.4.2	ASTM D3776/D3776M, Option C
Breaking strength	3.4.2	ASTM D5034
Dry: warp and filling		
Wet: warp and filling		
Colorfastness to perspiration	3.4.2	AATCC TM15
Color change		
Staining on cotton		
Staining on wool		
Colorfastness to dry cleaning	3.4.2	AATCC TM132 2/
Color change		
Staining on cotton		
Staining on wool		
Colorfastness to crocking	3.4.2	AATCC TM8
Dimensional stability to dry cleaning	3.4.2	AATCC TM158 2/
Width (armhole shield binding only)	3.4.4	Visual 1/
Edge finish (armhole shield binding only)	3.4.4	Visual 1/

FOOTNOTES:
1/ Results recorded as pass or fail.
2/ AATCC specifies using perchloroethylene, which is strictly regulated. Other dry-cleaning methods may be used to perform this testing. If other methods are used, they should be cited in the reporting of results.

TABLE XIII. Floating chest piece: chest piece padding verification.

Characteristic	Requirement	Verification
Fiber identification	3.4.8.4	AATCC TM20A
Color	3.4.8.4	Visual 1/
Construction	3.4.8.4	Visual 1/
Weight	3.4.8.4	ASTM D3776/D3776M, Option C
Thickness: initial and after 3 dry cleanings and steam pressings	3.4.8.4	ASTM D1777 2/
Breaking strength: machine and cross direction	3.4.8.4	ASTM D5034
Shrinkage after 3 dry cleanings and steam pressings: machine and cross direction	3.4.8.4	4.6.1.1 2/

FOOTNOTES:
1/ Results recorded as pass or fail.
2/ Any commercial dry-cleaning method may be used. Material shall be steam pressed after each dry cleaning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XIV. Collar closure hook and eye verification.

Characteristic	Requirement	Verification 1/
Material	table IV	Standard commercial 2/
Appearance	3.4.16	Visual
Dimensions	3.4.16	Visual
Color/finish	table IV	Visual
Coating type	table IV	Visual 2/
Coating application	table IV	Visual 2/
Coating tackiness	table IV	4.6.1.2
Attachment holes	table IV	Visual
Edges and surfaces	table IV	Visual

FOOTNOTE:
1/ Results recorded as pass or fail.
2/ May be addressed through a certificate of compliance (see 6.7)

TABLE XV. Snap fastener verification.

Characteristic	Requirement	Verification 1/
Material	3.4.15	Standard commercial
Color/finish	3.4.15	Visual
Coating type	3.4.15	Visual
Style	3.4.15	Visual
Edge finish	3.4.15	Visual
Size	3.4.15	Visual
Application	3.4.15	Visual

FOOTNOTE:
1/ Results recorded as pass or fail.

4.6.1.1 Dimensional stability of floating chest piece: chest piece padding. Three specimens, 22 by 22 inches, shall be cut from the polyester material (see 3.4.8.4), parallel to the machine and cross machine directions, and no closer than 3 inches from the selvage. An 18-inch square shall be marked within the 22-inch specimen with indelible ink. No marks shall be closer to the edge of the specimen than 1 inch. The specimen shall be commercially dry-cleaned three times using a solvent-based solution. Samples shall be bottom steam pressed after each dry cleaning for 20 seconds in a non-locked position and vacuumed for 10 seconds.

4.6.1.1.1 Dimensional stability calculation. Each of the three 22- by 22-inch specimens shall be laid out without tension on a flat surface. Care should be taken that the specimens are free from wrinkles and creases. The previously measured distances marked on the specimen (initial measurement, 18 inches) in each direction (machine and cross) shall be remeasured to the nearest 1/16 inch, recorded, averaged, and calculated for dimensional change. The dimensional change of the sample unit (3 specimens) shall be calculated to the nearest 0.10 percent using the following formula:

Dimensional change percent = (A-B)/A×100

Where: A = Average of initial measurements

B = Average measurements after dry cleaning

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

4.6.1.2 Tackiness of collar closure hook and eye. At room temperature (60 to 80 °F), a piece of commercial tissue paper shall be pressed against the lacquered surface of a hook and eye for 30 seconds, using the thumb and two fingers to exert pressure. After 30 seconds, the paper shall be removed from the surface. Any evidence of tissue adhering to the surface shall be scored as a failure.

4.6.2 In-process examination. Visual and dimensional examinations shall be performed at any point or during any phase of the manufacturing process to determine whether construction details, which cannot be examined in the finished product, are in accordance with the requirements specified in section 3. Materials and components which contain defects and damages, as defined in the visual examination of 4.6.3, shall be removed from production. Any in-process nonconformance remaining in the finished coat shall be classified as a defect in accordance with the visual examination of 4.6.3.

4.6.3 Visual examination. The coat shall be examined for defects in color, design, material, construction, workmanship, and marking. The defects shall be classified in accordance with the list of defects specified in 4.6.3.1. Inspection for defect categories I through XII shall occur when the coat is on the model form or when spread out on a table, inspection for defect categories XIII through XXV shall occur when the coat is completely buttoned on a model form, and inspection for defect categories XXVI through XXXIX shall occur when the coat is spread out on a table. The inspection conditions and the AQLs shall be as specified in the contract or order (see 6.2).

4.6.3.1 Classification of defects. All defects shall be classified as indicated in table XVI.

TABLE XVI. Classification of defects.

Component	Defect	Classification	
		Major	Minor
I. BARTACKS	a. One or more missing, loose, or misplaced (except bartacks on the buttonholes)		201
II. BUTTONHOLES	a. One or more omitted, added, or wrong type	101	
	b. Not corresponding to the size of the button:		
	(1) Too small, not permitting the button to enter the buttonhole	102	
	(2) Too large, 3/8 inch or more longer than the diameter of the button (measured at the inside of the purling)		202
	c. Buttonhole not securely caught on the fabric, causing the stitching to pull away from the fabric	103	
	d. Bartack missing or loose on:		
	(1) One buttonhole		203
	(2) Two or more buttonholes	104	
	e. Bartack misplaced, not serving intended purpose on one or more buttonholes		204
	f. One or more broken stitches in:		
	(1) One buttonhole		205
	(2) Two or more buttonholes	105	
	g. More than 2 skipped stitches in one or more buttonholes:		206
	h. Ragged edge, affecting appearance		207
	i. Any uncut buttonhole		208
	j. Gimp omitted in one or more buttonholes or the end of the gimp not pulled through to the underside		209

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Classification of defects – Continued.

Component	Defect	Classification	
		Major	Minor
II. BUTTONHOLES (continued)	k. Stitches per buttonhole (not including the bartack) less than the minimum specified by:		
	(1) One or two stitches		210
	(2) Three or more stitches	106	
	l. One or more buttonholes finished with the purling on the underside	107	
III. BUTTONS	a. One or more missing, loose, defective, or improper size or type 1/		211
	b. One or more buttons sewn with the head of the eagle in other than the specified position (see 3.4.14.1)		212
IV. CLEANNESS	a. Any spot or stain that cannot be easily removed with a moistened cloth and that is clearly noticeable from a distance of three feet		
	(1) On the outside	108	
	(2) On the inside		213
	b. Two or more thread ends not trimmed throughout the garment, one or more bastings not removed, or two or more shade tickets not removed		214
	c. Any residue of synthetic thread (when used) not brushed off or removed		215
V. COMPONENTS AND ASSEMBLY	a. Any component part or required operation omitted (not otherwise classified in this table)		
	(1) Affecting appearance or serviceability	109	
	(2) Not affecting appearance or serviceability		216
	b. Any defective component or defect of assembly (not herein classified)		
	(1) Affecting appearance or serviceability	110	
	(2) Not affecting appearance or serviceability		217
VI. CUTTING	a. Any component part of the basic material not cut in accordance with the patterns or not cut in accordance with the specified requirements	111	
	b. Any non-basic material component not cut in accordance with the patterns or not cut in accordance with the specified requirements		218
VII. EYELETS	a. One or more omitted or added	112	
	b. Wrong type		219
	c. Eyelet not securely caught in the fabric, causing the stitching to pull away from the fabric	113	
	d. Diameter of the inside opening less than 1/8 inch or more than 1/4 inch		220
	e. Any eyelet uncut		221

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Classification of defects – Continued.

Component	Defect	Classification	
		Major	Minor
VII. EYELETS (continued)	f. One or more broken stitches in:		
	(1) One eyelet		224
	(2) Two eyelets		225
	g. More than two skipped stitches in one or both eyelets		226
VIII. HOOK AND EYE	a. Hook or eye omitted	113	
	b. Not specified type or size		227
	c. Hook or eye not securely tacked to the ends of the collar		228
	d. Not aligned, causing the collar ends to be uneven by 1/4 inch or more when the front is buttoned and the hook and eye are fastened	114	
IX. MATERIAL DEFECTS AND DAMAGE	a. Any hole, cut, tear, smash, mend, burn, scorched area, shade marking, or open place:		
	(1) On the outside (any dimension)	115	
	(2) On the inside (longest dimension in any direction		
	(a) Up to 1/4 inch, inclusive		229
	(b) More than 1/4 inch	116	
	b. Loose yarn, misweave, area of no dye penetration, dye streak, or woven-in waste: more than 1/4 inch (largest dimension in any direction) on the outside		230
	c. Permanent fold, pleat, or crease in the cloth (when caught in seaming or stitching) on the outside	117	
	d. Visible needle hole(s) (no thread present) or needle chew (i.e., presence of scuffed or broken yarns caused by stitching)		
	(1) On the outside:		
	(a) Up to 1/4 inch, inclusive		231
	(b) More than 1/4 inch	119	
	(2) On the inside, more than 1/2 inch		232
	e. Knot or slub on the outside [2/]		233
X. PRESSING	a. Burned, scorched, or area with shine or gloss		
	(1) Affecting appearance or serviceability	120	
	(2) Not affecting appearance or serviceability		234
	b. Pressing omitted - entire garment		235
	c. Armhole stretched		
	(1) Affecting appearance or serviceability	121	
	(2) Not affecting appearance or serviceability		236
	d. Poorly pressed (unless otherwise indicated)		237
	e. Basting or pressing impression not removed		238
	f. Gloss not removed		239
	g. Armholes not blocked or poorly blocked		240

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Classification of defects – Continued.

Component	Defect	Classification	
		Major	Minor
X. PRESSING (continued)	h. Edge bulky (i.e., not pressed solid)		241
	i. Inside of the armhole not creased as required		242
	j. Armhole seam not pressed open across the top as required		243
	k. Sleeve not creased at the front or back arm seam as specified		244
	l. Wrinkles not removed		245
	m. Lining not pressed smooth		246
XI. SEAMS AND STITCHING	a. Accuracy of seaming:		
	(1) Any seam twisted, gathered, puckered, or pleated		247
	(2) Part of the garment caught in any unrelated operation or stitching		
	(a) Affecting appearance or serviceability	122	
	(b) Not affecting appearance or serviceability		248
	(3) Unsightly hand felling or blindstitching exposed on the outside of the coat, affecting appearance		249
	(4) End of any stitching (when not caught in other seams or stitching) not backtacked or backstitched as required		250
	(5) Wrong shade of thread or two shades of thread used on the outside of the coat, affecting appearance	123	
	b. Gage of stitching (edge, raise, and topstitching):		
	(1) Irregular (i.e., unevenly gaged, or various stitchings not uniform, affecting appearance)		251
	(2) Gage varies more than 1/16 inch when no range is specified		252
	c. Open seams: 3/		
	(1) On the outside:		
	(a) Up to 1/4 inch, inclusive		253
	(b) More than 1/4 inch, but not more than 1/2 inch		254
	(c) More than 1/2 inch	124	
	(2) On the inside, except machine felling:		
	(a) Up to 1/2 inch, inclusive		255
	(b) More than 1/2 inch		256
	(3) Machine felling:		
	(a) Up to 1 inch, inclusive		257
	(b) More than 1 inch		258

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Classification of defects – Continued.

Component	Defect	Classification	
		Major	Minor
XI. SEAMS AND STITCHING (continued)	d. Raw edges: 4/		
	(1) On the outside:		
	(a) More than 1/8 inch, but not more than 1/4 inch		259
	(b) More than 1/4 inch	125	
	(2) On the inside:		
	(a) More than 1/8 inch, but not more than 1/4 inch		260
	(b) More than 1/4 inch	118	
	e. Stitch tension:		
	(1) Loose tension resulting in a loose seam (stitches grin)	126	
	(2) Loose tension on raised, edge, or top stitching, resulting in loosely exposed bobbin or top thread		261
	(3) Tight tension (stitches break when normal strain is applied)	127	
	f. Stitches per inch less than the minimum specified by: 5/		
	(1) Two or three stitches (except label stitching)		262
	(2) Four or more stitches (except label stitching)	128	
	(3) One or more stitches on label		262b
	h. Wrong stitch or seam type		263
	i. Stitching skipped or broken (on edge, raised, or topstitching when seam is seamed, turned, and stitched):		
	(1) 1/4 inch or more, but not more than 1/2 inch		264
	(2) More than 1/2 inch	165	
XII. SHADED PARTS	a. Any shaded part on the outside of the coat	129	
	b. Any lining part shaded		265
XIII. COLLAR CONSTRUCTION	a. Interfacing or buckram omitted	130	
	b. Interfacing or buckram tight or twisted, causing puckers on the collar, affecting appearance		266
	c. Tight at the joint to front or back, causing puckers or pleats at the neck of the coat, affecting appearance	131	
	d. Collar ends overlapping when fastened		267
	e. Collar ends gap more than 1/4 inch when fastened	132	
	f. Center of the eyelet from the finished end of the collar less than 1-3/8 inches or more than 1-5/8 inches		268
	g. One or both eyelets off-center with the top and bottom edges of the collar by more than 1/16 inch	133	
	h. Collar off-center by more than 1/4 inch	134	
	i. Finished height of the collar less than 1-5/8 inches or more than 1-7/8 inches		269

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Classification of defects – Continued.

Component	Defect	Classification	
		Major	Minor
XIII. COLLAR CONSTRUCTION (continued)	j. Collar irregular in height by 3⁄16 inch or more	135	
	k. Front finished ends of the collar uneven in height by 3/16 inch or more		270
	l. End of the collar distorted, twisted, or crooked, caused by hand felling or hand stitching exposed on the outside of either collar end		271
	m. Hand tacking at lower corner of the collar to the coat insecure or omitted		272
XIV. ALIGNMENT OF FRONT BUTTONS AND BUTTONHOLES	a. Not aligned, causing a noticeable bulge or twist on the front when buttoned, affecting appearance	136	
XV. LENGTH OF BUTTONED FRONTS	a. Right front at the corner shorter than the left front at the bottom by:		
	(1) More than 1/8 inch but not more than 1/4 inch		273
	(2) More than 1/4 inch	137	
	b. Right front at the corner longer than the left front by:		
	(1) More than 1/4 inch but not more than 3/8 inch		274
	(2) More than 3/8 inch		275
	c. Left front at the corner exposed beyond the bottom of the right front by more than 1/8 inch		276
XVI. SHOULDER	a. Improperly sewn, causing the shoulders or back to twist		
	(1) Affecting appearance or serviceability	138	
	(2) Not affecting appearance or serviceability		277
XVII. SHOULDER PADS	a. Not completely caught in the armhole tacking		278
	b. Misplaced, not serving intended purpose (i.e., too far back or too far forward)		279
	c. One or both pads omitted	139	
XVIII. SHOULDER STRAPS	a. Misplaced (i.e., one shoulder strap further forward or back from the position of the other strap, affecting appearance)		280
	b. Shoulder strap stitched to the coat too full or twisted, or stitched to the coat too tight, causing fullness or twist on the front or back of the coat	140	
	c. Poorly shaped	141	
	d. Shoulder seam exposed beyond the back edge of the shoulder strap (except the rounded end)		281
	e. Width of the shoulder strap at the armhole seam:		
	(1) Less than 2-3/8 inches, but not less than 2-1/8 inches		282
	(2) More than 2-5/8 inches, but not more than 2-7/8 inches		283
	(3) Less than 2-1/8 inches or more than 2-7/8 inches	166	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Classification of defects – Continued.

Component	Defect	Classification	
		Major	Minor
XVIII. SHOULDER STRAPS (continued)	f. Width of shoulder strap across the center of the insignia button:		
	(1) Less than 1-5/8 inches, but not less than 1-1/2 inches		286
	(2) More than 1-7/8 inches but not more than 2 inches		287
	(3) Less than 1-1/2 inches or more than 2 inches	167	
	g. Rounded end of the shoulder strap positioned less than 1/4 inch or more than 3/8 inch from the collar edge		289
	h. Buttons not uniformly set from the collar edge by more than 1/4 inch		290
	i. Center of button less than 3/4 inch or more than 7/8 inch from the rounded end of the shoulder strap	142	
XIX. ARMHOLES (CONSTRUCTION)	a. Stretched	143	
	b. Taped too tight, causing puckering around the armhole seam, affecting appearance	144	
	c. Crooked seam		291
	d. Tape stitching exposed and visible on the outside of the coat		292
	e. Sleeve head pads not completely tacked to the armholes, or misplaced, not serving the intended purpose		293
	f. One or both sleeve head pads omitted		294
	g. Armhole not tacked completely or insecurely tacked		295
XX. SLEEVES	a. Setting and hang:		
	(1) Sleeve fullness misplaced, affecting appearance	145	
	(2) Sleeve too far front (i.e., the front edge of the creased sleeve bottom more than 2 inches in front of the front/side front seam)	146	
	(3) Sleeve too far back (i.e., the front edge of the creased sleeve bottom less than exactly even going back from the front/side front seam)	147	
	(4) Hang of sleeves in opposite directions (i.e., one sleeve too far forward and one sleeve too far back, tolerance of 1-1/2 inches)	148	
	(5) Sleeve tight in the armhole (i.e., roll effect not present at the front or back of sleeve)	149	
	b. Sleeve lining:		
	(1) Twisted, tight, or short, causing bulge, twist, or puckering on the outside of sleeve	150	
	(2) Sleeve lining too long, causing the lining to sag at the bottom more than 1/2 inch		297
	(3) Sleeve lining seams out of alignment more than 3/8 inch with the sleeve seams at the armholes or at the bottom of the sleeve		298

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Classification of defects – Continued.

Component	Defect	Classification	
		Major	Minor
XX. SLEEVES (continued)	c. Construction of sleeves:		
	(1) Tacking on bottom turnup to the sleeve interfacing omitted or insecure		299
	(2) Sleeve bottom edge uneven by more than 1/4 inch		201a
	(3) Tacking on one or both sleeve lining seams to sleeve seams omitted or insecure		202a
	(4) Bottom edge of the sleeve lining turnup less than 1 inch or more than 1-1/2 inches up from the bottom edge of the sleeve		203a
	d. Sleeve cuffs:		
	(1) Full, tight, puckered, or twisted		204a
	(2) Point of the sleeve cuff not uniformly shaped or not forced out to a sharp point		205a
	(3) Finished height of the sleeve cuff at the point or the sleeve crease not as specified		206a
	(4) Edge of the cuff irregular by 1/8 inch or more		207a
XXI. BODY (OUTSIDE)	a. Fitting of the linings tight, short, or twisted, causing fullness or twist on the outside of the coat, affecting appearance	151	
XXII. FRONT AND BOTTOM EDGES	a. Front edges stretched, affecting appearance		208a
	b. Tape set on tight, causing puckering on the front, affecting appearance		209a
	c. Bottom edge stretched, puckered, or uneven, affecting appearance		210a
	d. Bottom corner of the right front poorly shaped, affecting appearance		211a
	e. Right front rolling outward below the loop fastener tape piece	152	
	f. Front edge irregular, affecting appearance		212a
XXIII. FRONT FACING	a. Short, tight, or twisted, causing fullness or twist on the fronts, affecting appearance	153	
XXIV. OUTERSHELL PANEL SEAMS	a. Not pressed open		214a
	b. Any curved panel seam stretched or distorted, affecting appearance		215a
XXV. VENT OPENING	a. Left vent edge stretched, causing the vent to spread open, affecting appearance		216a
	b. Row of stitching across the top of the vent opening omitted or insecure or not caught through the vent lining		217a
	c. Left vent shorter than the right vent by 1/4 inches or more		218a
	d. Left vent longer than the right vent by 1/4 inches or more		219a
	e. Left edge tight, causing puckering on the vent edge, affecting appearance		220a

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Classification of defects – Continued.

Component	Defect	Classification	
		Major	Minor
XXV. VENT OPENING (continued)	f. Left vent edge crooked, affecting appearance		221a
	g. Left vent back part overlapping the right vent back part at the bottom edge less than 2-1/2 inches or more than 3 inches		222a
	h. Width of the left vent (measured at bottom piped edge) less than 1-7/8 inches or more than 2-1/8 inches		223a
	i. Row of stitching across the top of the vent opening less than 1-5/8 inches or more than 2 inches long		224a
	j. Row of stitching across the top of the vent opening misplaced, not serving the intended purpose	154	
XXVI. FRONT BUTTONHOLES	a. Inside edge of the buttonhole eyelet positioned less than 1/2 inch or more than 3/4 inch from the front edge, including the piped edge		225a
	b. More than 1/4 inch from equal spacing		226a
	c. Top buttonhole less than 3/4 inch or more than 1 inch from the top edge		227a
	d. Unevenly spaced from the front edge by more than 3/16 inch		228a
XXVII. FRONT BUTTONS (POSITIONED AND SECURE SEWING)	a. Out of vertical alignment by 1/4 inch or more		229a
	b. Button stitching caught through the interfacing (buttonhole stand) but not caught in the facing:		
	(1) On 1 button		230a
	(2) On 2 or more buttons		231a
	c. Button stitching not caught through the interfacing (buttonhole stand) on one or more buttons	155	
XXVIII. BELT LOOPS	a. Loops less than 3/8 inch or more than 5/8 inch wide		232a
	b. Length of the belt loop from the top to bottom folded edge less than 2-5/8 inches or more than 2-7/8 inches		233a
	c. Bottom end of the loop bartacked through the double fold, exposing the bartack		234a
	d. Omitted:		
	(1) 2 belt loops	156	
	(2) 1 belt loop		235a
	e. Loop not aligned with the side seam:		
	(1) More than 1/4 inch, but not more than 1/2 inch		236a
	(2) More than 1/2 inch		237a
	f. Top folded end of the loop bartacked to the coat less than 1/8 inch or more than 1/4 inch from the folded end		238a

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Classification of defects – Continued.

Component	Defect	Classification	
		Major	Minor
XXIX. LABELS	a. Any required label misplaced, missing, incorrect, or illegible or the size label not securely caught in the stitching		239a
	b. Combination instruction/identification label not stitched on 4 sides or not positioned as specified on the facing		240a
XXX. HANGER LOOP	a. Hanger loop omitted or any end not securely stitched		241a
	b. Less than 1-7/8 inches or more than 2-1/8 inches long, measured along the collar seam		242a
	c. Hanger loop not stitched to the neck of the coat prior to seaming the collar to the neck of the coat		243a
XXXI. FRONT FACING	a. Fullness or pleats on the facings between the buttons, between the buttonholes, or between the front edge and the button or buttonholes when buttoned		244a
	b. Tacking of the back edge to one or both interfacings:		
	(1) Omitted		245a
	(2) Insecure or incomplete for a distance of more than 5 inches below the shoulder seam, or more than 4 inches above the bottom edge of the lining		246a
XXXII. BACK LINING	a. Excessive fullness or pleats		247a
	b. Twisted, not affecting smoothness on the outside surface of the back		248a
	c. Pleat in the center of the lining omitted		249a
	d. Folded edge of the center pleat facing the right side of the coat		250a
XXXIII. FRONT LININGS	a. Excessive puckering or pleated		251a
	b. Twisted, not affecting smoothness on the outside of the coat		252a
	c. One or both chest pleats on the shoulder omitted		253a
	d. Folded edge of one or both chest pleats facing toward the shoulder		254a
	e. Side seam of the lining not tacked to one or both side seams of the outer shell		255a
	f. Back stitch at the lower armhole edge from approximately 1-1/2 inches to front of forearm sleeve lining seam to side seam of the body lining omitted		256a
XXXIV. COLLAR LINING AND COLLAR TAB	a. Collar tab at the right end of the collar omitted or extending beyond the collar end less than 3/4 inch or more than 1 inch		257a
	b. Stitching not extending the full width of the collar tab		258a
	c. Ends of the collar lining not securely tacked		259a
	d. Hand felling of the lining across the full width at the left or right end of the collar omitted		260a

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Classification of defects – Continued.

Component	Defect	Classification	
		Major	Minor
XXXV. RIGHT VENT LINING	a. Top edge not completely covering the edges of the center back seam outlets		261a
	b. Folded edge of the lining not extending beyond the center seam allowance or the right back part		262a
	c. Tight, short, or twisted, causing fullness or twist on the outside of the coat		263a
XXXVI. BARCODE LABELS/TAGS	a. Barcode omitted or not readable by scanner		264a
	b. Human Readable Interpretation (HRI) omitted or illegible		265a
	c. Not visible on the folded, packaged item or causes damage to the item		266a
XXXVII. FUSING	a. Omitted on any component part	157	
	b. Twisted or causing puckers or pleats on any fused component	158	
	c. Full, causing waviness on any fused component	159	
	d. Any partial or complete delamination of any fused component	160	
	e. Any strike through, bleed through, or color change	161	
	f. Any resin transfer to the coat		
	(1) On any fused component	162	
	(2) On any non-fused component		267a
XXXVIII. BELT	a. Interfacing omitted	163	
	b. Pointed end poorly shaped, affecting appearance		268a
	c. Square end of the belt not finished		269a
	d. Any part short, full, or twisted, causing fullness or twists on the outer side of the belt, affecting appearance		270a
	e. Width not as specified		271a
	f. Irregular in width by 1/8 inch or more, affecting appearance		272a
	g. Belt keeper omitted	164	
	h. Length of the belt keeper not as specified when measured from the bartack to the folded end		272b
	i. Center of the buttonhole to the end of the belt		
	(1) Less than 7/8 inch, but not less than 3/4 inch or more than 1-1/8 inches		273a
	(2) Less than 3/4 inch		274a
	j. Buttonhole off center by more than 1/4 inch		275a
	k. Purling of the buttonhole finished on the underside of the belt		276a
	l. Button omitted		277a
	m. Button misplaced		278a
	n. Stud or socket portion of the snap omitted		279a
	o. Snap misplaced		280a

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Classification of defects – Continued.

Component	Defect	Classification	
XXXIX. INSIDE POCKET	a. Width of the opening not within the tolerances specified		281a

FOOTNOTES:

1/ Buttons shall be considered defective if they have sharp, rough, cracked, or split edges; unsound soldering; scratches, dents, blemishes, or imbedded foreign matter; loose or bent shanks; or are poorly plated or badly shaded.

2/ Only knots and slubs that exceed the limits specified in the material specification shall be scored as defects in evaluating the quality of the coat.

3/ One or more broken stitches or two or more continuous skipped or run-off stitches constitute an open seam.

4/ Raw edges shall be classified as such when they occur at places where an edge is required to be turned under. Raw edges not caught in stitching shall be classified as an open seam.

5/ To be scored only if condition exists on major portion of the seam.

4.6.4 Dimensional examination. The coat shall be examined for conformance to the dimensions specified in table VI and the methods of measure specified in table VII. Any measurement deviating from dimensions and tolerances specified in table VI shall be scored as a measurement defect. Sleeve lengths uneven by 1/2 inch or more shall be classified as a measurement defect. The inspection and the AQL shall be as specified in the contract or purchase order (see 6.2).

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The coat is intended for wear by male officer personnel of the United States Marine Corps.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Sizes and lengths required (see 1.2).
c. When first article inspection is required (see 3.1.1 and 4.3).
d. When conformance inspection is required (see 3.1.2 and 4.4).
e. Applicable Government patterns (see 3.6).
f. AQLs (see 3.8).
g. Exceptions to inspection conditions (see 4.2).
h. Component and material sampling and acceptance criteria (see 4.5.1 and 4.5.2).
i. End item sampling and acceptance criteria (see 4.5.3).
j. Component and material examination and tests (see 4.6.1).
k. Visual examination inspection conditions and AQLs (see 4.6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

l. Dimensional examination inspection conditions and AQLs (see 4.6.4).

m. Packaging required (see 5.1).

6.3 Information requests. For access to information such as specification, patterns, drawings, and standard shade samples of cloth, go to https://www.dla.mil/TroopSupport/ClothingandTextiles/SpecRequest.aspx for the Defense Logistics Agency Troop Support's Clothing and Textile Specification/Pattern/Drawing Request form. Complete the request form and then submit the form. Requests to use equivalent materials or components or to make changes to the pattern should be sent to the contracting officer for approval by the military services.

6.4 Known source of supply – haircloth. A suggested source for the haircloth (see 3.4.8.2) is QST Industries, Inc., www.qst.com. A suggested source for the alternate is Cotswold Industries, www.cotswoldindustries.com. Equivalent products may be available from other sources.

6.5 Known source of supply – label tape. A suggested source of supply and style number for the alternate label tape (see 3.4.17) is https://eaglewright.com, style Avery Dennison 4800TWT Polyester Thermal Transfer Printable Tape. Equivalent products may be available from other sources.

6.6 Thread shade. Black AA, Cable No. 66023, or equivalent, is recommended to meet the shade match requirements (see 3.4.12).

6.7 Certificate of compliance. Certificates of compliance may be accepted by the contracting agency in lieu of test data. It is recommended that vendors contact the contracting officer prior to using certificates of compliance to address any test requirement. The government reserves the right to verify the accuracy of any data on certificates of compliance.

6.8 Subject term (key word) listing.

Belt
Male
Uniform

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

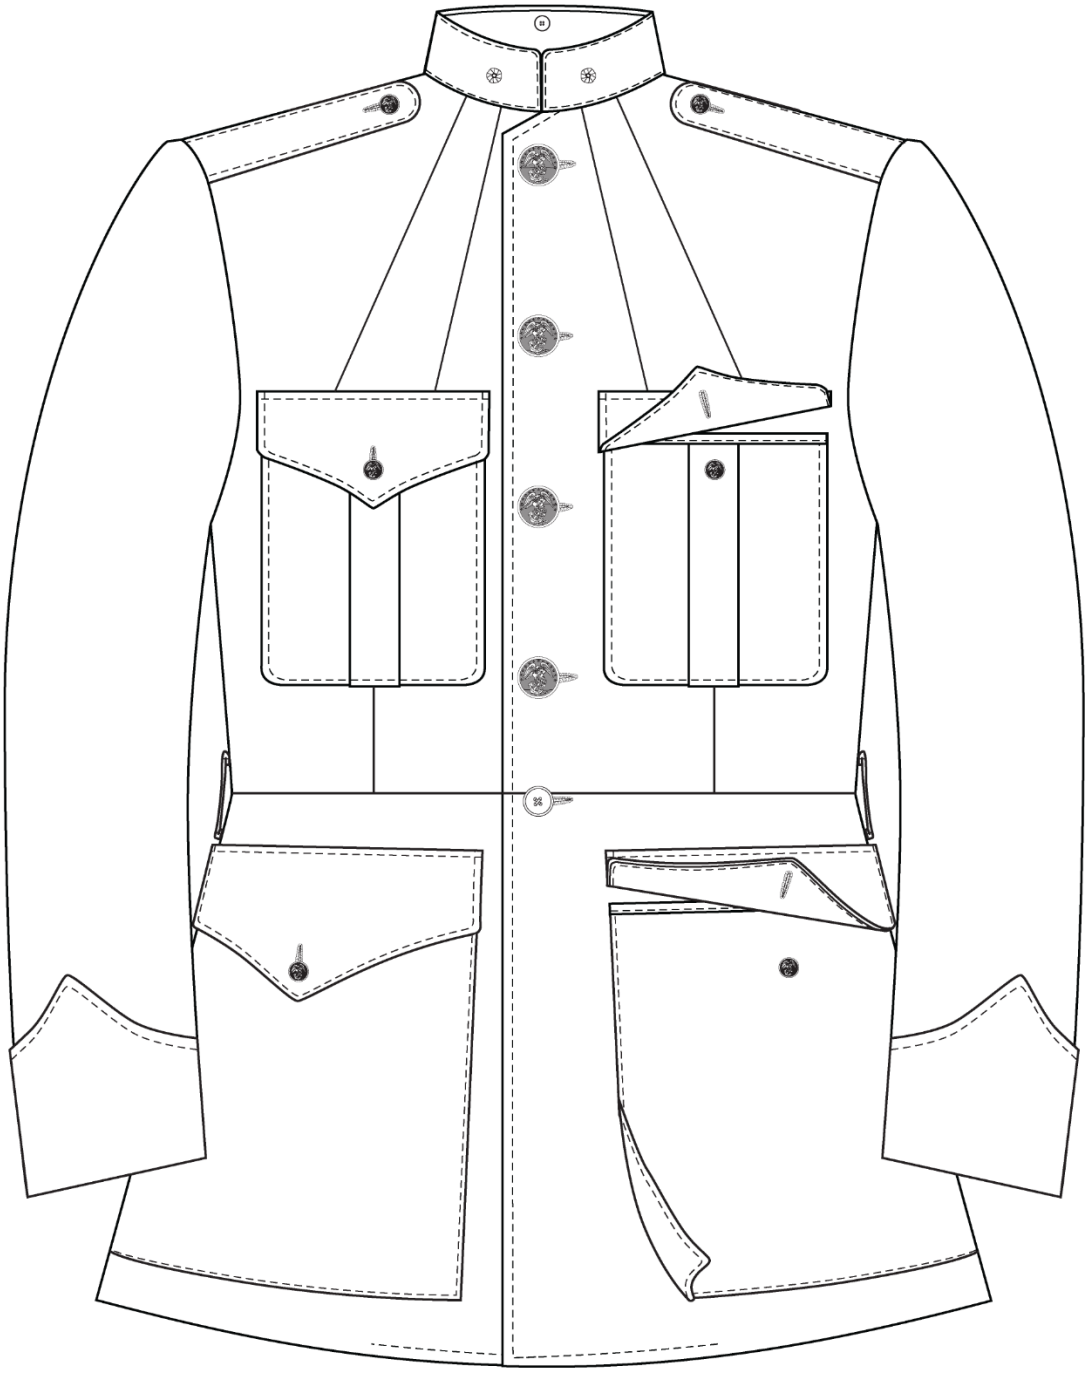


FIGURE 1. Coat, man's – dress; blue (officer's) – front.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

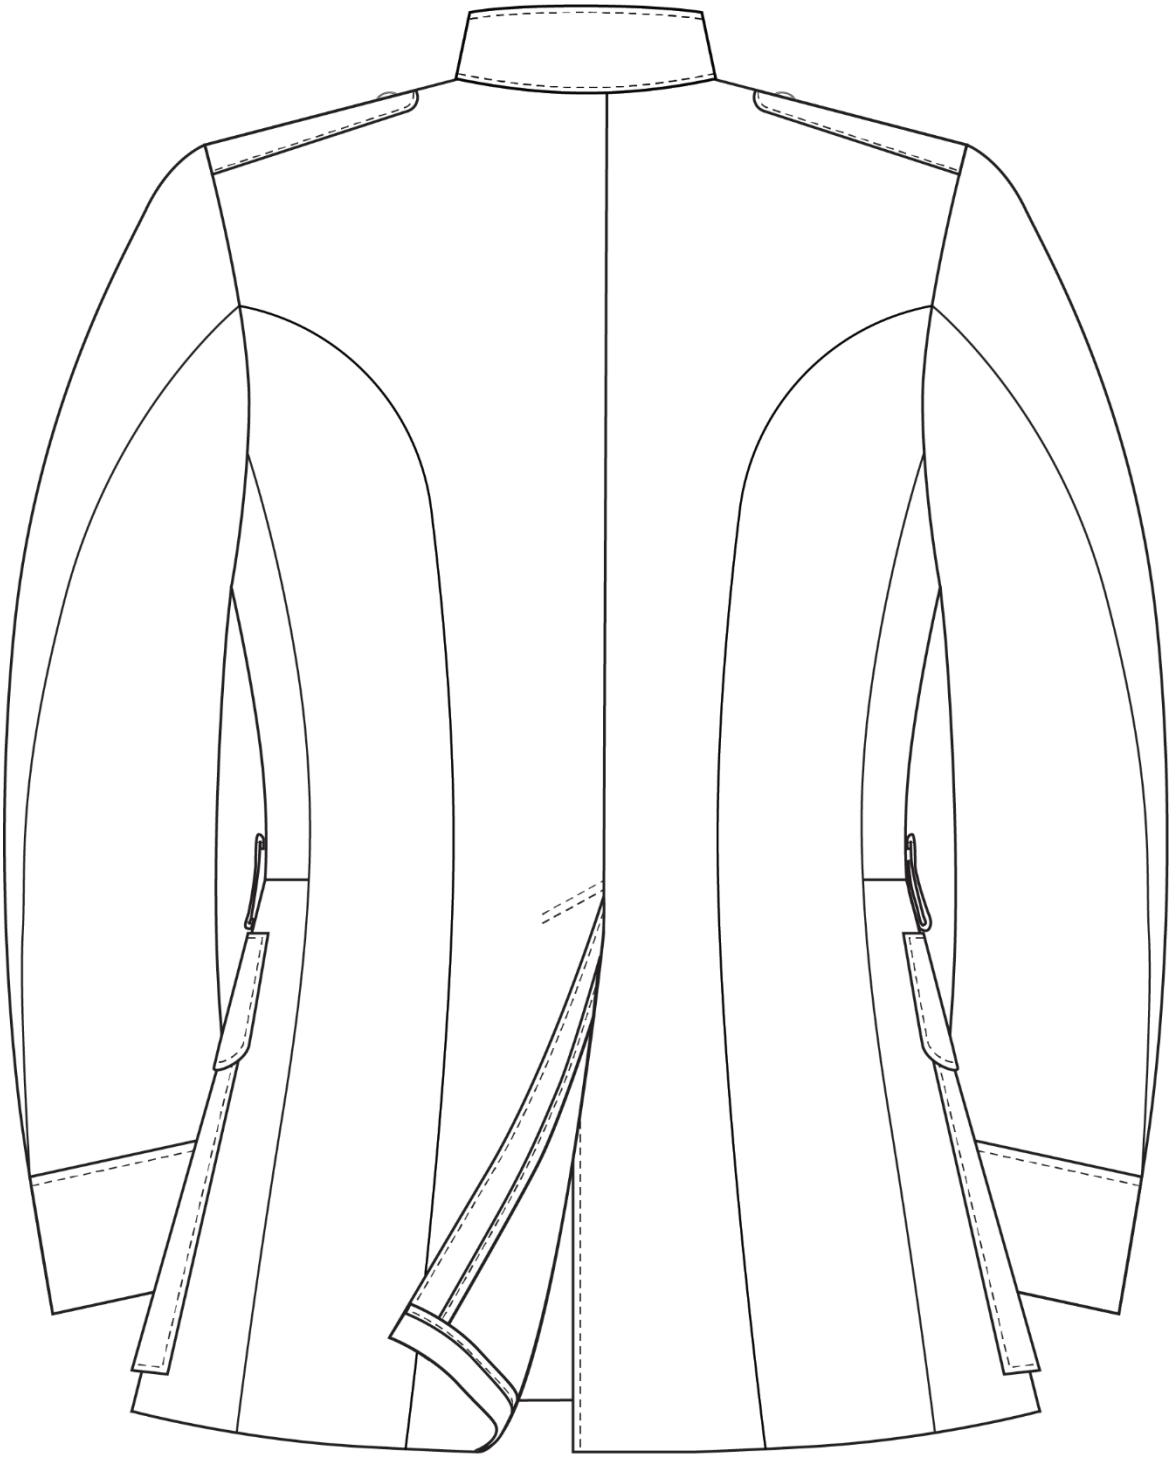


FIGURE 2. Coat, man's – dress; blue (officer's) – back.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

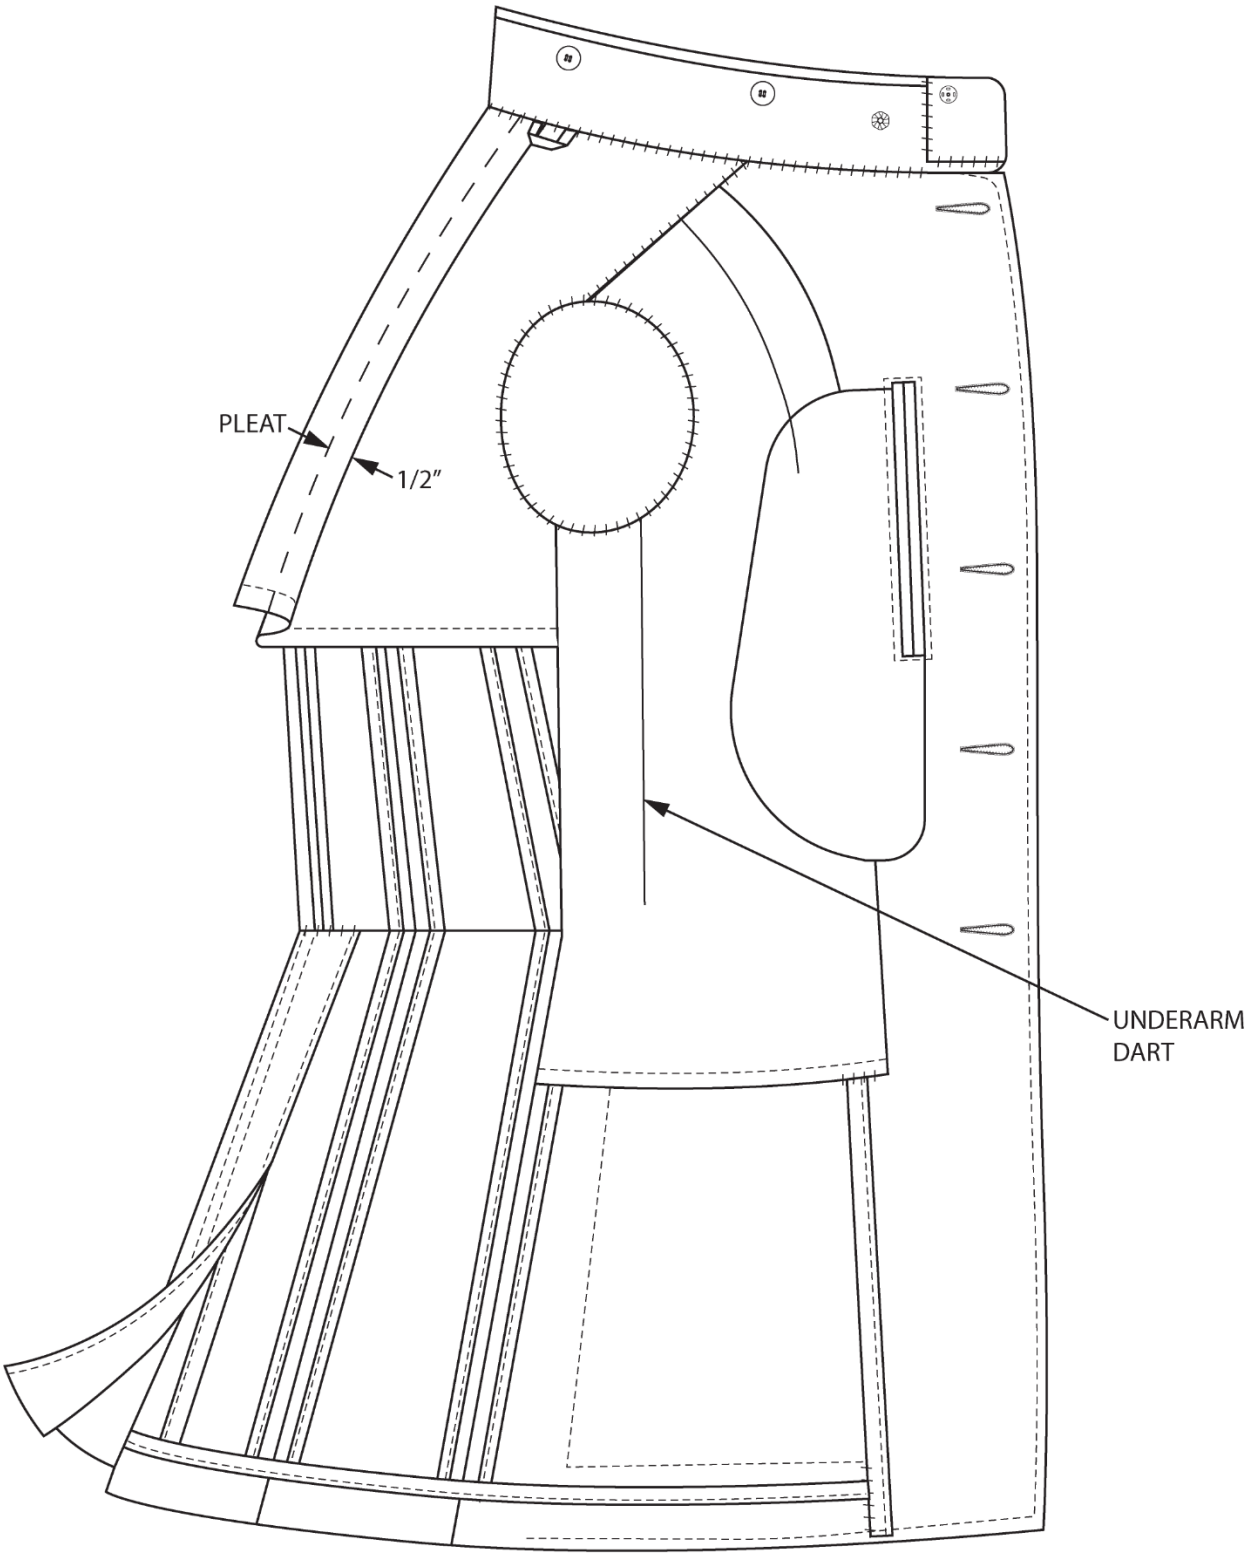


FIGURE 3A. Coat, man's – dress; blue (officer's) – vertical inside pocket opening (left).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

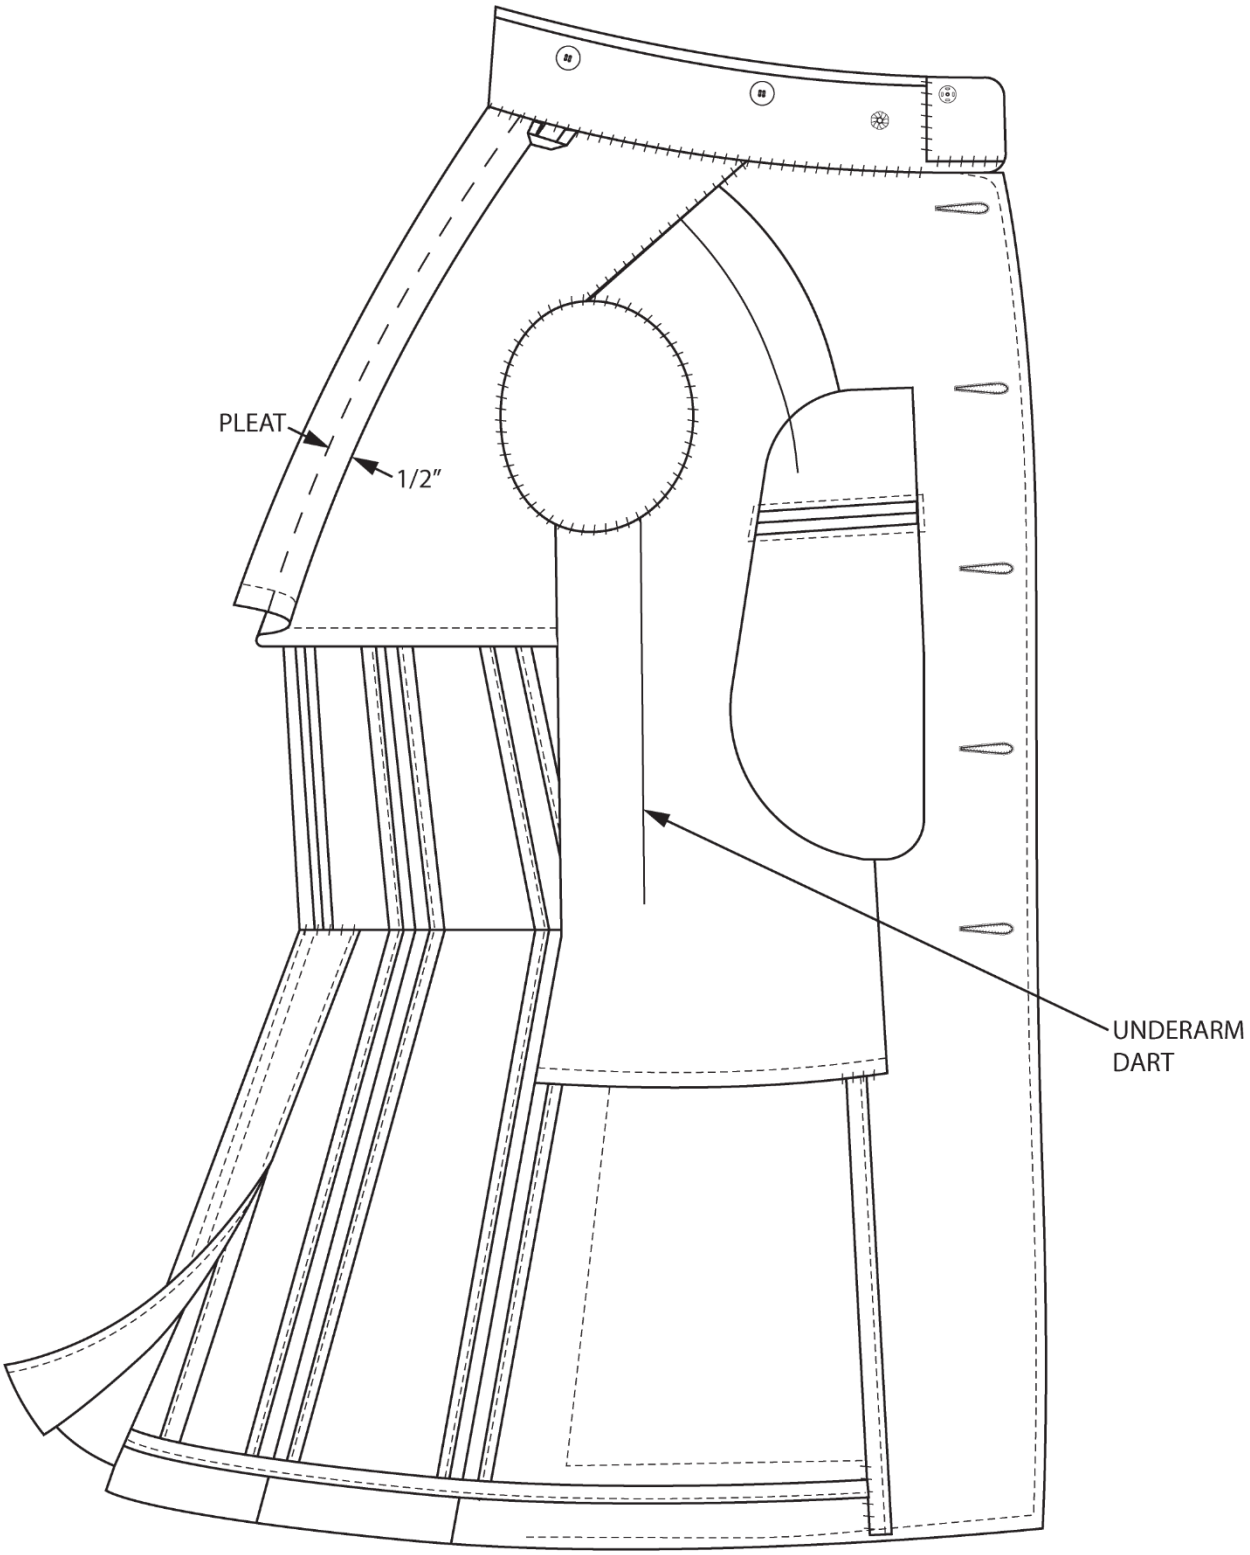


FIGURE 3B. Coat, man's – dress; blue (officer's) – horizontal inside pocket opening (left).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

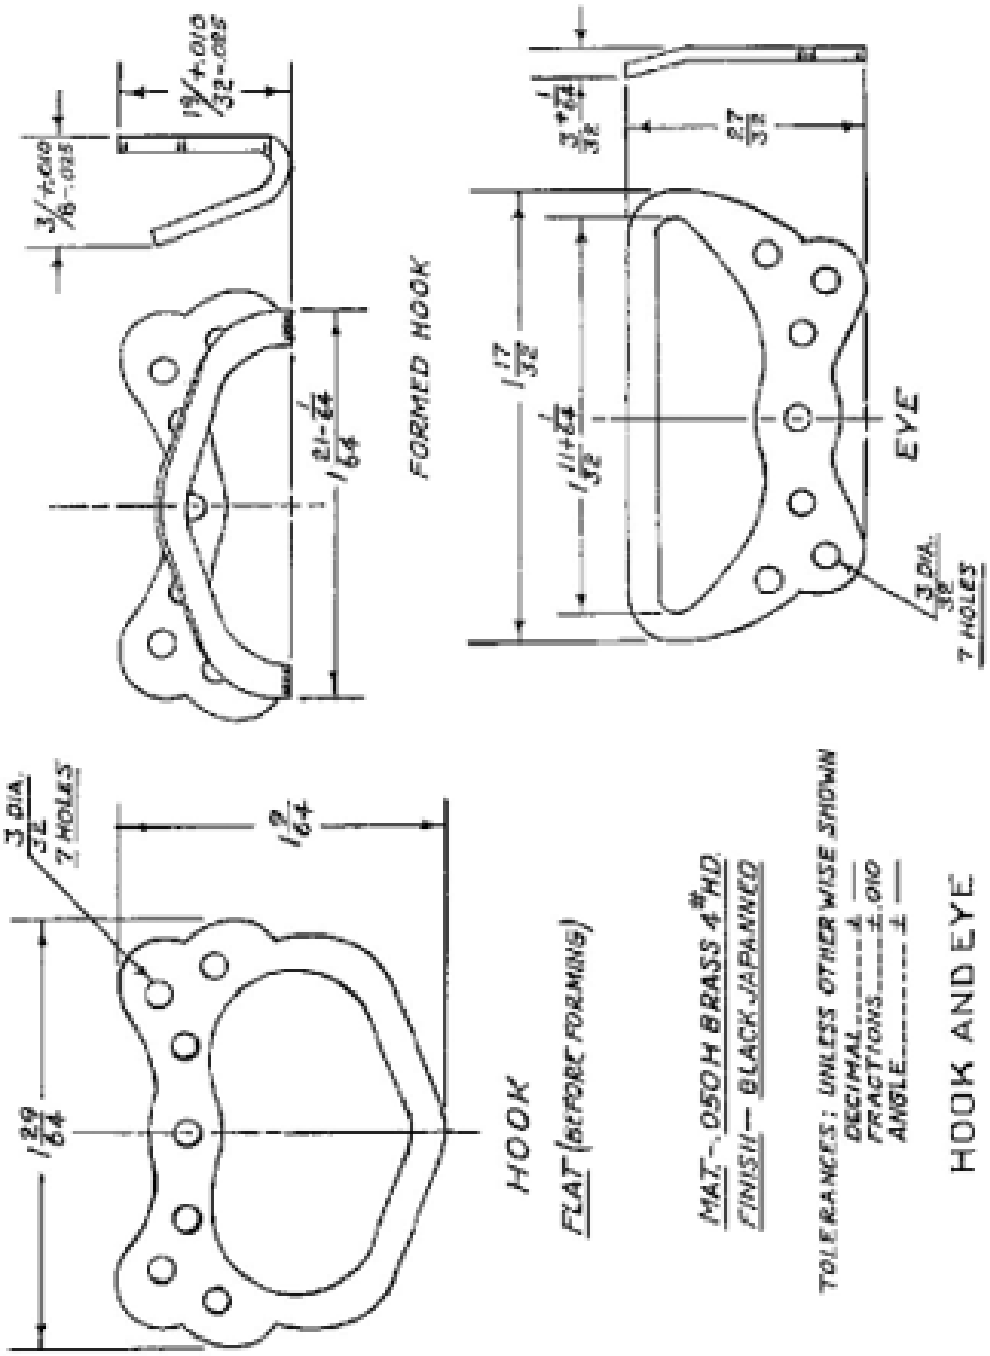


FIGURE 4. Coat, man's – dress; blue (officer's) – collar hook and eye.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.



FIGURE 5. Coat, man's – dress; blue (officer's) – woven label.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

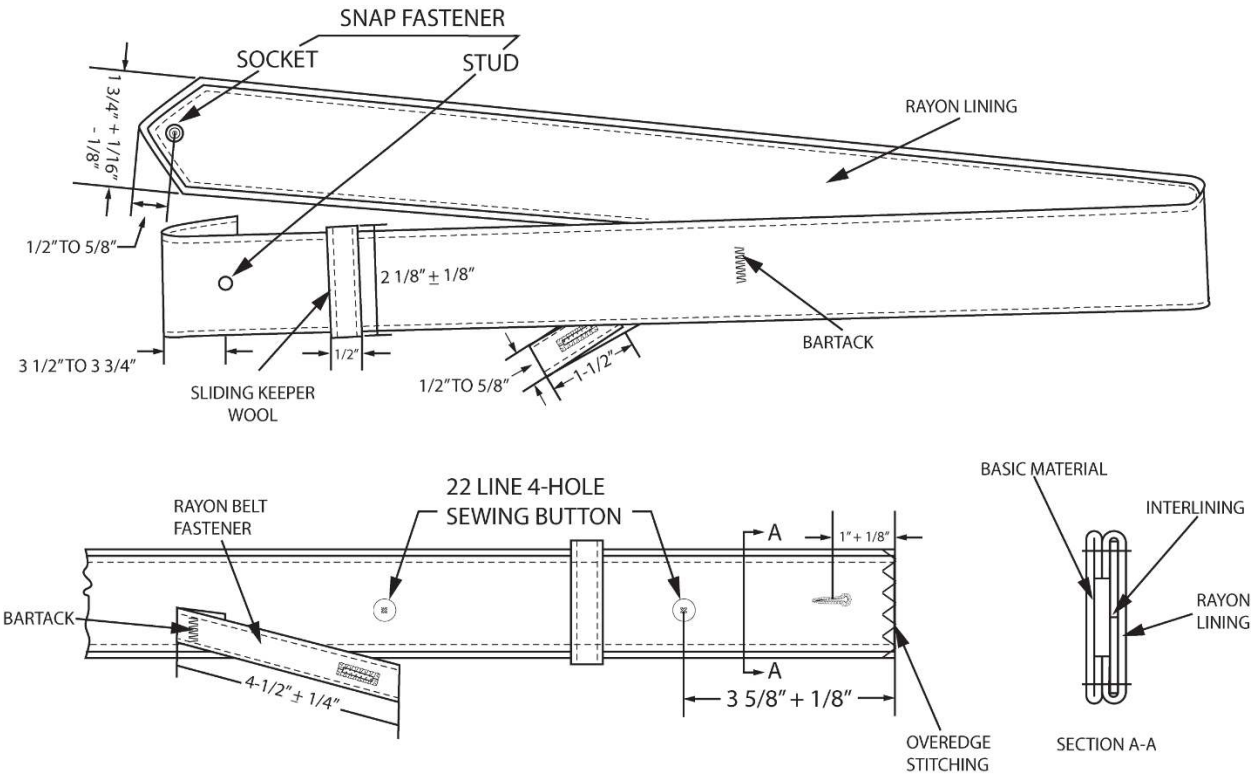


FIGURE 6. Coat, man's – dress; blue (officer's) – belt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

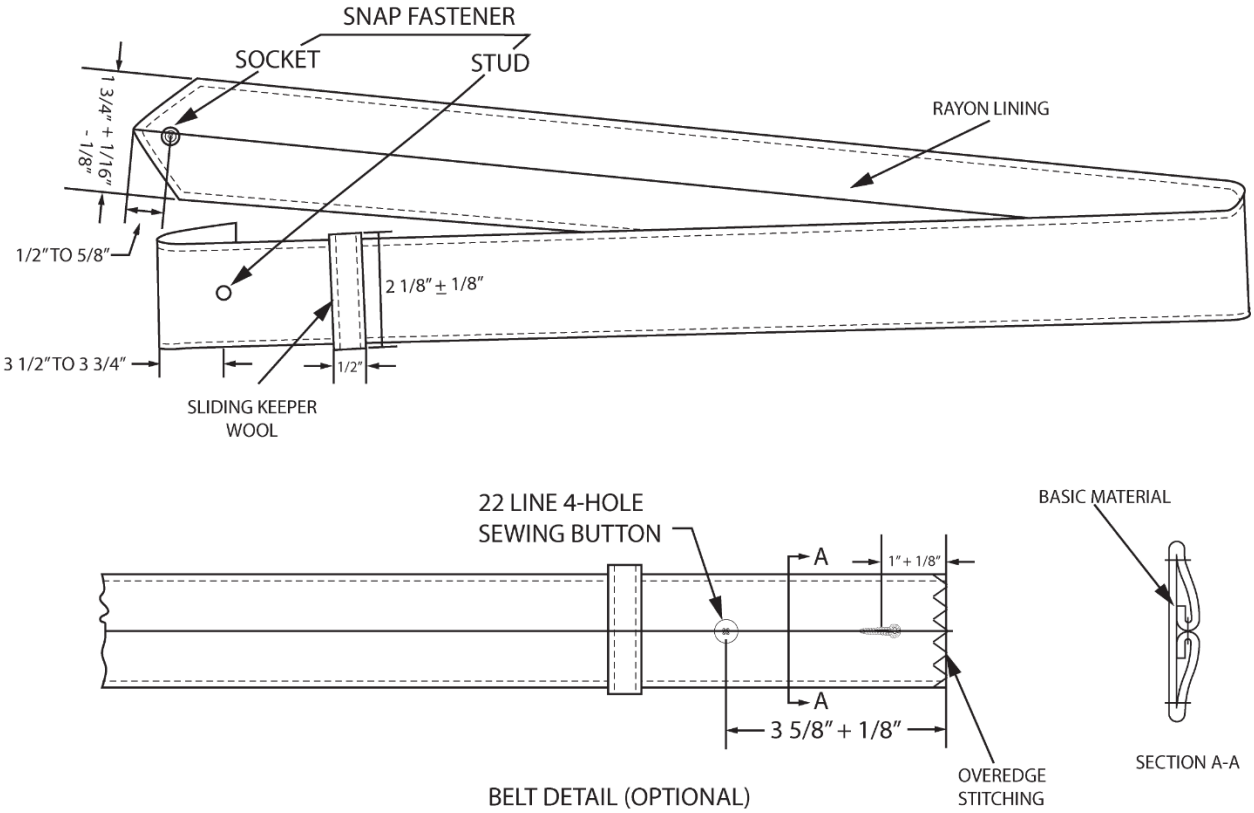


FIGURE 7. Coat, man's – dress; blue (officer's) – belt (optional).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

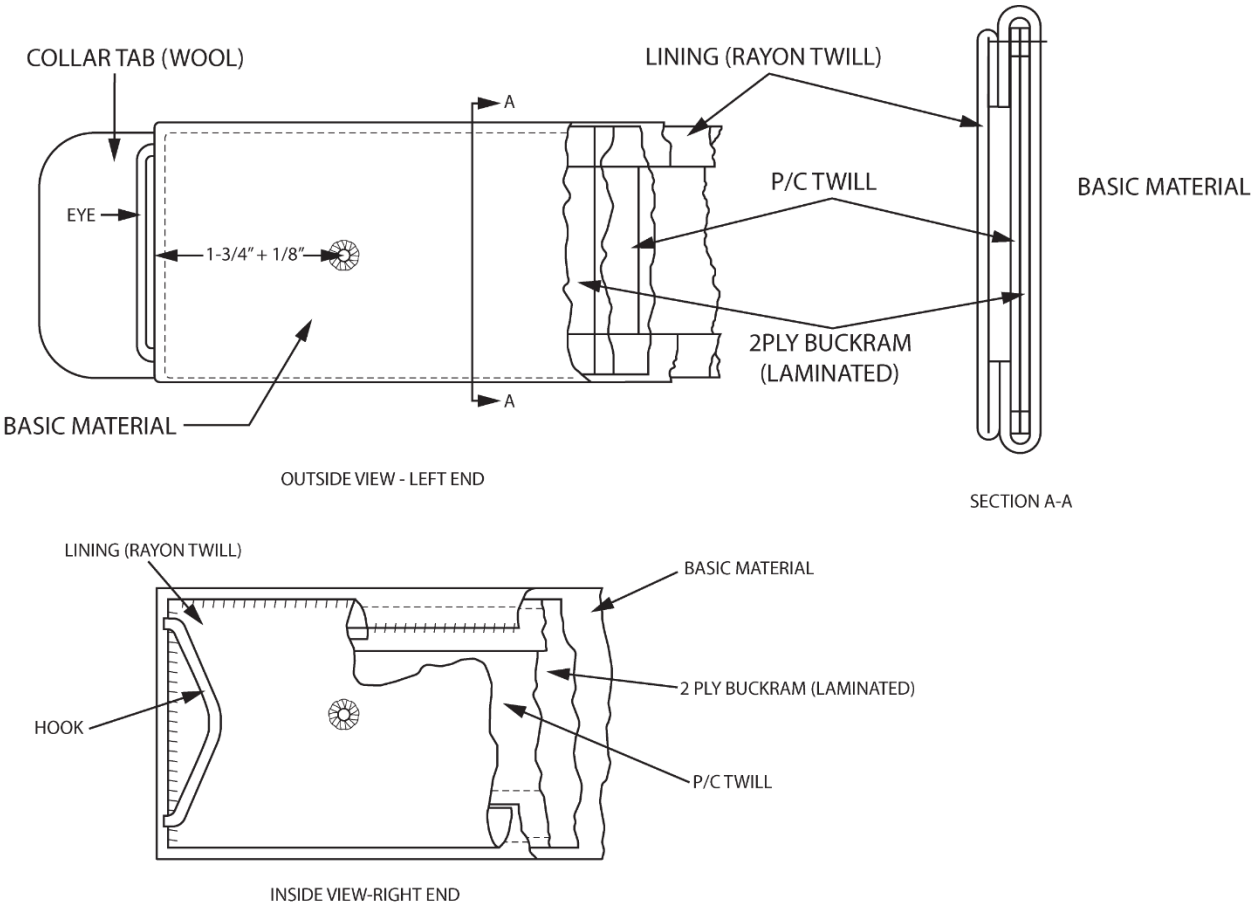


FIGURE 8. Coat, man's – dress; blue (officer's) – collar detail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

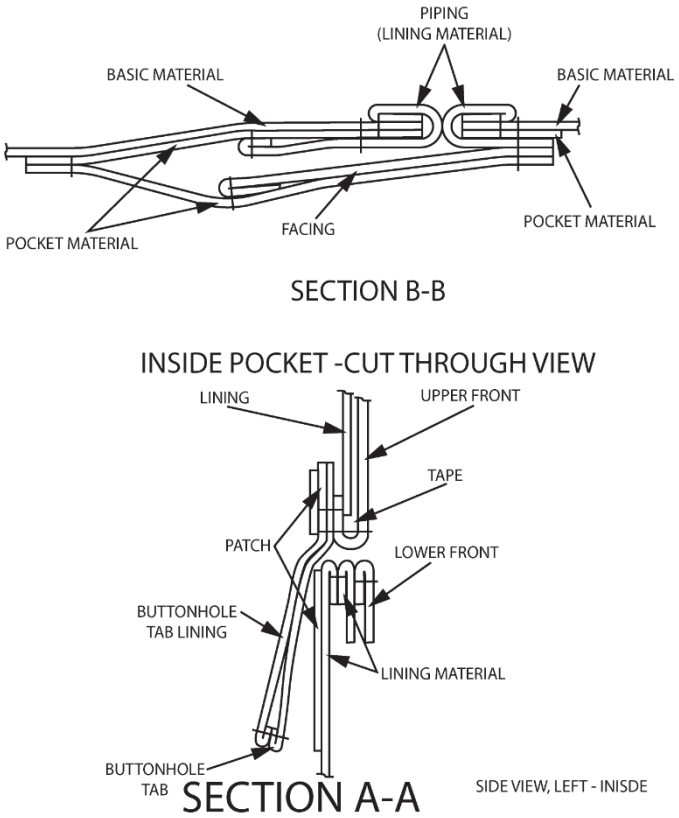


FIGURE 9. Coat, man's – dress; blue (officer's) – selected construction details 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

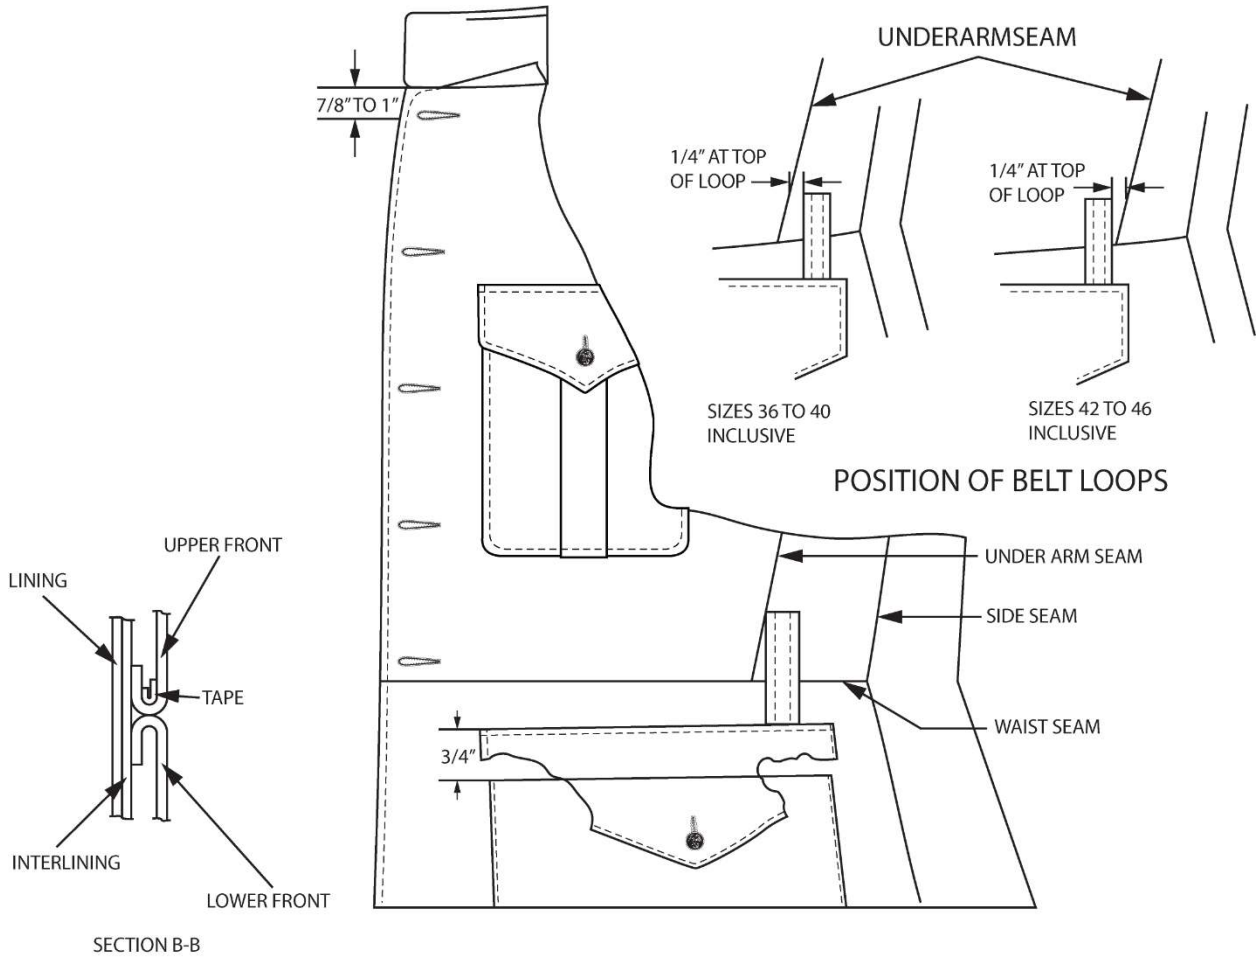


FIGURE 10. Coat, man's – dress; blue (officer's) – selected construction details 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

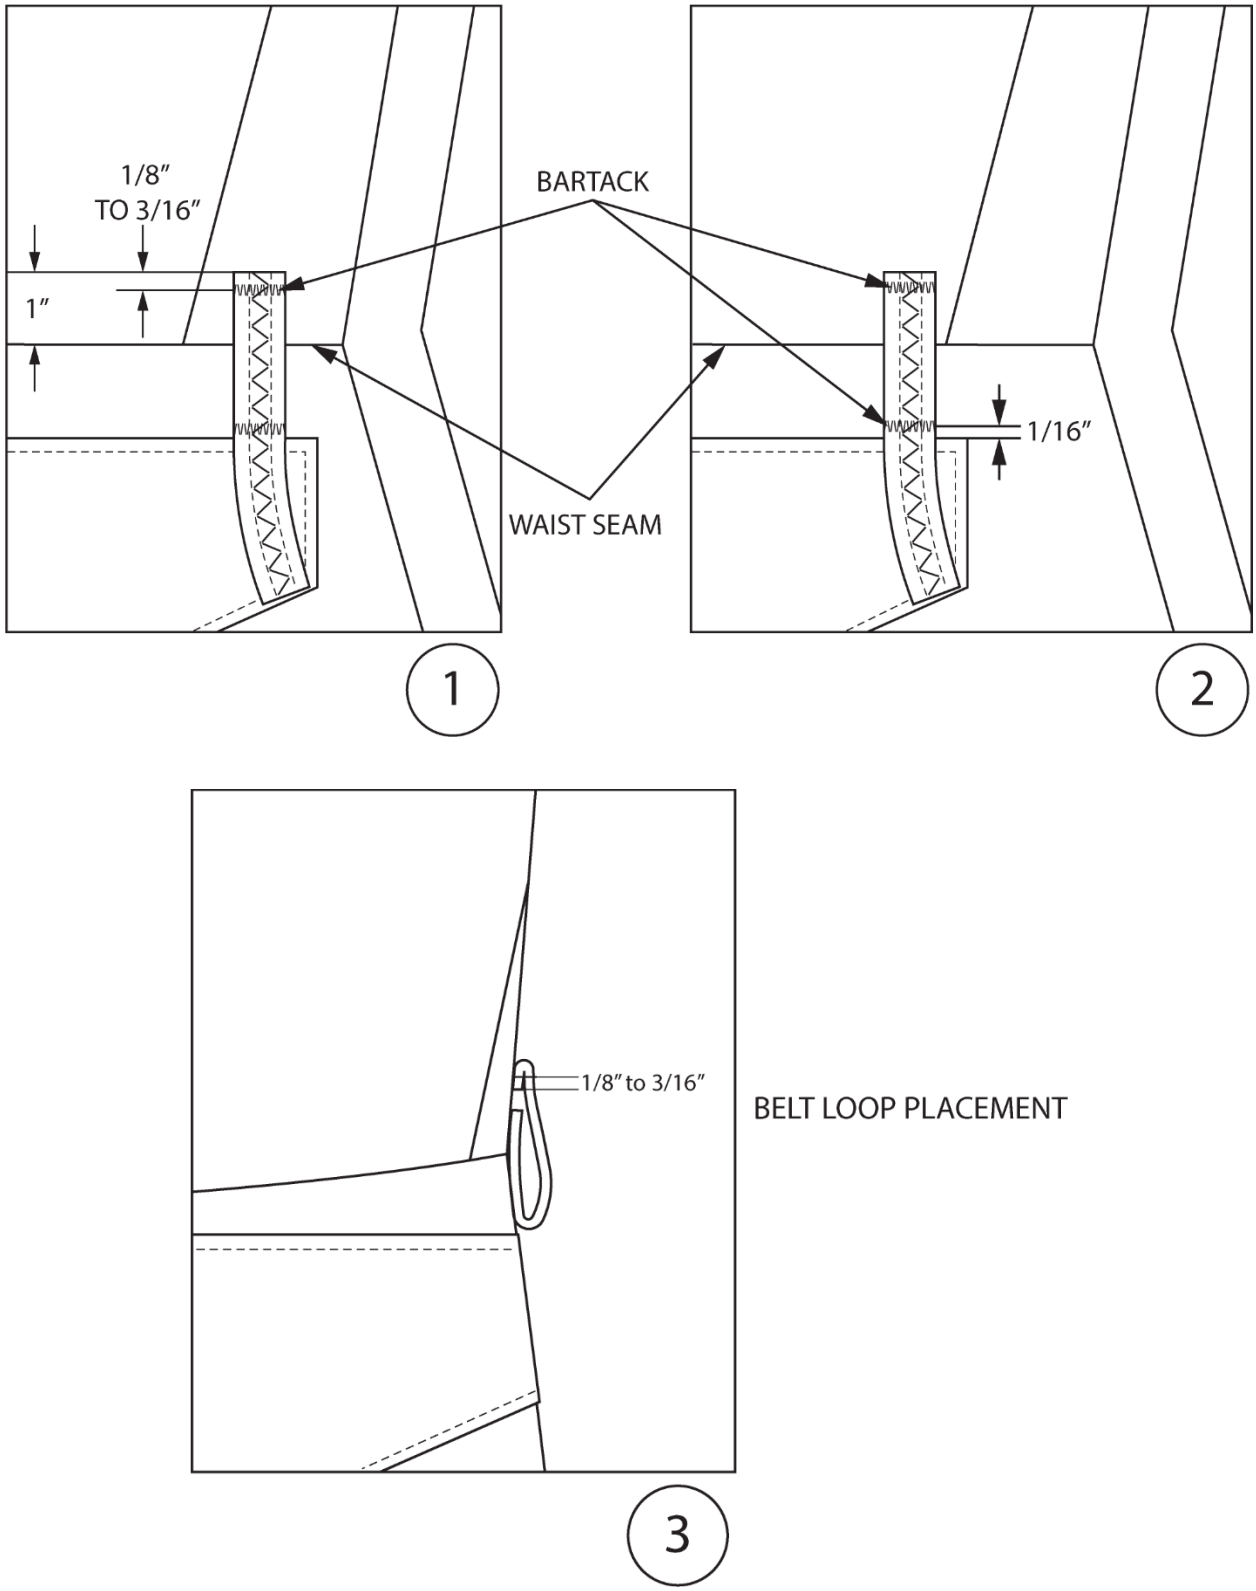


FIGURE 11. Coat, man's – dress; blue (officer's) – selected construction details 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

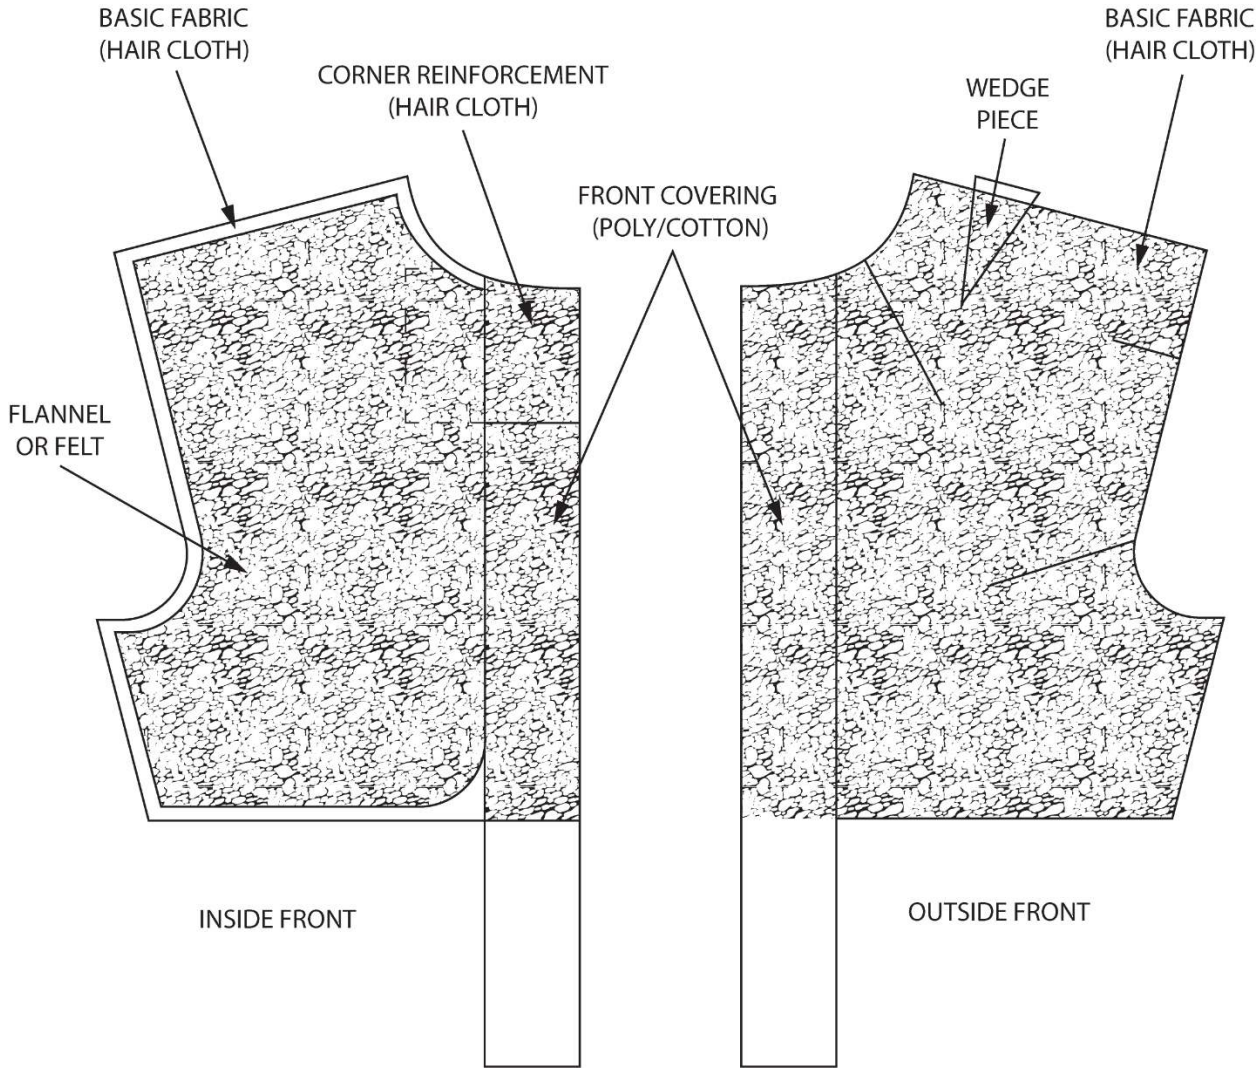


FIGURE 12. Coat, man's – dress; blue (officer's) – coat front.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

APPENDIX A
CONSTRUCTION CRITERIA

A.1 SCOPE

A.1.1 Scope. This appendix is a mandatory part of the specification. The information contained herein is intended for compliance. The operations provided in table A-I are not required to be performed in the presented order; however, the finished coat shall have the same performance as a coat made in accordance with the operations specified in this appendix, unless contractors have received concurrence from the contracting agency for any variation from the stitch type, seam type, and stitches per inch cited.

TABLE A-I. Construction criteria.

No.	Operation	Stitch type	Seam type	Stitches per inch
1.	Cutting.			
	a. Cut the component parts (listed in 3.5.1) as indicated on the patterns and in the material specified. Unless otherwise specified on the pattern, the directional line is with the warp direction of the cloth. Additional cutting requirements are provided below for those components not controlled by a furnished pattern pie.			
	b. Cut all basic material parts (see 3.4.1 or 3.4.1.1) of the coat from one piece of basic material, except the belt loops, armhole shields, and front facings, which may be cut from ends. The belt loops are cut 1 inch wide and of sufficient length to comply with operations 4 and 22. Parts cut from ends are a good match to the main assembly. When the armhole shields are cut from ends, the shields match each other.			
	c. Cut the lining (see 3.4.2) for the coat body (fronts, sides, and backs) and collar from one piece of lining material. All other lining components may be cut from ends. All sleeve lining parts (two top sleeve and two under sleeve) match in shade.			
	d. Cut the two armhole and two shoulder stay pieces (see 3.4.3) on the bias, 5/8 to 3/4 inch wide and 4±1/4 inches long.			
	e. Cut the fusible interfacings (see 3.4.8.5) in accordance with the directional lines on the patterns.			
	f. Cut the braid for the hanger loop (see 3.4.9) of sufficient length to comply with the finished length (operation 36).			
	g. Cut the binding for the armhole shields from the bias binding (see 3.4.10), 3/4 to 1 inch wide.			
	h. Dress the left vent in accordance with the left vent marker.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
2.	Replacement of defective or damaged parts.			
	a. During cutting, replace all parts containing defects, such as a hole, cut, tear, smash, mend, burn, scorched area, open place, loose yarn, snagged thread, area of no dye penetration, dye streak, missing yarn, broken yarn, thin place, shade bar, or woven-in waste.			
	b. During the manufacturing process, replace all parts damaged by needle chews, scissor or knife cuts, tears, holes, mends, or burns.			
3.	Apply fusible interfacing.			
	a. Position the fusible onto the related component part (see table V for listing) set back 1/8 inch from edges, and fuse together in accordance with the fusible manufacturer's recommendations for time, temperature, and pressure.			
	b. Ensure the fused lots are cool to the touch prior to tying into bundles.			
4.	Make belt loops and belt keeper.			
	a. Fold the sides of the strip lengthwise towards the center, abutting the raw edges together with a covering stitch. Each row of stitching is uniformly 1/8 inch from the folded edge.	406	EFh-1	10-14
	b. Cut each loop for the left and right side 3-1/2±1/8 inches long.			
	c. Cut the keeper 4-1/2 inches long. Fold the keeper in half, end to end, and join the ends with a bartack or row of stitching across the width of the keeper. Turn to finished position, with the joining seam on the underside positioned in the middle of the keeper. The finished keeper measures 2-1/8 to 2-1/4 inches long from folded end to folded end.	Bartack or 301	SSa-1	28 per bartack or 10-14
5.	Make shoulder straps.			
	a. The shoulder strap consists of two plies of basic material. The top ply is interfaced with fusible.			
	b. Stitch the two plies of the shoulder strap together with a 1/4-inch seam.	301	SSe-2(a)	10-14
	c. Trim the points and turn the shoulder strap, working the seams out to the edges. Topstitch the shoulder strap uniformly 1/8 inch from the edge through all plies.	301	SSe-2(b)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
5. cont.	d. Make a horizontal, eyelet-end, straight finish type buttonhole, cut 3/4 inch long to fit a 27-ligne insignia button, in each strap midway between the back and front edges and with the inside edge of the eyelet placed to ensure that, in the finished coat, the end of the shoulder strap finishes 1/4 to 3/8 inch from the edge of the collar. The purling finishes on the outside of the strap. The buttonhole is clean cut, well made through all plies of material, and worked over gimp. The gimp is pulled through to the underside of the button.			
	e. Press the shoulder strap smooth and flat with a heated pressing iron or pressing machine.			
6.	Make one-piece belt (see figures 6 through 8).			
	a. The belt is made of one piece of basic material, fully interfaced with fusible.			
	b. Fold the piece in half lengthwise, forming two plies. Join the two plies together with a 3/8-inch seam.			
	c. Spread the seam open and press the belt smooth and flat with a heated pressing iron, matching the pointed end of the belt.			
	d. Close the pointed end of the belt with a 1/4-inch seam along the slanted edges.			
	e. Evenly trim the pointed end of the belt for turning. Turn the belt through the open end, completely working out the point.			
	f. Topstitch the belt uniformly 1/8 inch from the top and bottom folded edges and the seamed end, turning in the square end of the belt 1/4 inch and catching the turned-in portion in the stitching. The seam of the belt finishes off center.			
	g. Or, as an alternate, the square end of the belt may be overedged.			
	h. The finished width of the belt is 1-3/4+1/16, -1/8 inches. The finished length of the belt for each size coat is shown in table VII.			
	i. Make a horizontal eyelet end, taper-bar type buttonhole, cut 5/8 inch long, in the center of the belt. The inside edge of the eyelet end is 1/2 to 5/8 inch from the buckle end of the belt. The buttonhole is worked over gimp to fit a 22-ligne sewing hole button. The purling of the buttonhole finishes on the outside of the belt. The buttonhole is clean-cut and well made. The end of the buttonhole is securely tacked.			
	j. Mark the location for sewing one 22-ligne sewing hole button to the underside of the belt.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
6. cont.	k. Securely sew the 22-ligne button at the mark on the belt to properly engage the buttonhole in the square end. On the finished belt, the button finishes 3-5/8±1/8 inches from the square end of the belt. The button is sewn to the belt with the end of the stitching securely tacked.	Hand		6 per button (double thread)
	l. Place the belt keeper on the belt at the square end and secure by buttoning the end. Press the belt smooth and flat with a heated pressing iron or pressing machine. The end of the keeper is spread open and pressed flat on the underside at the center of the belt.			
7.	Attach snap fastener.			
	a. Sew the socket part of the snap fastener to the inside pointed end of the belt 1/2 to 5/8 inch from the point.			
	b. Snap the stud part of the snap fastener onto the socket part.			
8.	Assemble collar.			
	a. The collar is made of one ply each of basic material (see 3.4.1), collar interfacing (polyester or polyester/cotton twill or plain weave, 3.4.5), collar buckram (cotton buckram, 3.4.7), and lining (see 3.4.2).			
	b. Seam the collar interfacing and collar buckram together 1/8 to 1/4 inch from all edges and trim interfacing even with the edges of the buckram.	301	SSa-1	10-14
	c. Lap the upper edge of the interfacing approximately 1/2 inch on the outside edge of the collar outer ply and seam together 1/4 inch from the raw edge of the interfacing. The outer ply extends not less than 1 inch at each end of the collar interfacing.	301	LSa-1	10-14
	d. Smoothly fold the outer ply over the upper and lower edges of the interfacing. Tack the portion of the outer ply folded to the inside at the lower edge of the interfacing. The stitching is not through to the outer ply of the collar.	Hand		2-3
	e. Fold the ends of the outer ply to the inside ends of the interfacing and tack to the interfacing with overcast stitching, turning under the upper and lower edges sufficiently so as not to be visible in the finished collar.	Hand		2-3
	f. Lap approximately 1/2 inch of the top inside edge of the collar on the raw top edge of the collar lining with the lining face up. Stitch the collar uniformly 1/8 inch on both front and top edges, catching the collar lining in the stitching at the upper edge. The lining extends a minimum of 1 inch beyond each end of the collar.	301	LSa-1 (top) and OSf-1 (ends)	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
8. cont.	g. Turn the collar lining at the seam to the inside of the collar and press smooth and flat with a heated pressing iron or pressing machine.			
	h. Make one eyelet through all plies at each end of the collar midway between the top and bottom edges and 1-3/4±1/8 inches from the finished ends. The eyelet finishes with the purling on the outside of the collar and finishes with a 1/8-inch diameter opening.	Eyelet		20 per eyelet (minimum)
9.	Assemble sleeves and sleeve cuffs.			
	a. Finished appearance of sleeve cuffs: The upper curved and pointed edge of the sleeve cuff are formed and creased in accordance with the sleeve cuff marker and are uniformly stitched to the sleeve.			
	b. Position the top and under sleeves with the notches matching and join at the forearm with a 3/8-inch seam.	301	SSa-1	10-14
	c. Spread the seam open and press flat with a heated pressing iron.			
	d. Fold the sleeve cuff lengthwise at the point with the wrong side out. Tack the point 1/8 inch from the raw edges. Turn the sleeve cuff, completely working out the point.	301	SSa-1	10-14
	e. Turn under the upper edge of the sleeve cuff, forming the finished curved edge in accordance with the shape of the pattern. Press smooth and flat with a heated pressing iron or pressing machine, creasing the upper edge of cuff. The cuff may be basted instead of pressed.	101		4-6
	f. Mark the sleeve in accordance with the pattern for positioning the sleeve cuffs, with the notch matching the forearm seam line and with the lower raw edge of the sleeve and marker even.			
	g. Position the sleeve cuff at the mark on the sleeve and seam uniformly 1/8 inch from the upper edge of cuff.	301	LSd-1	10-14
	h. Join the top and under sleeve at the back arm with a 3/8-inch seam, catching the ends of the sleeve cuff in the seam.	301	SSa-1	10-14
	i. Spread the sleeve and sleeve cuff seam open and press smooth and flat with a heated pressing iron. Trim ends of cuff if necessary.			
	j. Turn the sleeve cuff outlet to the inside, in accordance with notches, against the bottom end of the sleeve and baste along the turned edge of the sleeve cuff.	Hand or 301		4-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
9. cont.	k. Tack the raw edge of the sleeve cuff to the body of the sleeve with blind stitching. Press the bottom edge smooth and flat with a heated pressing iron.	103	SSm-1	4-6
	l. On the finished coat, the height of the cuff, when measured from the folded bottom edge of the cuff, is 2-3/4±1/4 inches at the forearm and back arm seams and 4-3/4±1/4 inches at the point.			
10.	Make sleeve linings and assemble sleeves.			
	a. Position the top and under sleeve linings in accordance with notches on pattern and join at the forearm and back arm, respectively, with a 3/8-inch seam.	301 or 401	SSa-1	10-14
	b. Position the sleeve lining on the sleeve with the upper edge of the lining extending 3/4 to 1 inch beyond the armhole edge of the sleeve.			
	c. Tack the forearm seam and back arm seam of the sleeve lining to the forearm seam and back arm seam, respectively. The back arm seam tacking extends from approximately the midpoint of the back arm seam to not more than 6 inches above the creased bottom edge. The forearm seam tacking extends for a distance of 1-1/2 to 2 inches below the bottom left open forearm seam notch.	301	SSa-1	6-8
	d. As an alternate to 10.a - c, when using a sleeve lining felling machine:			
	(1) Join the back arm seam and forearm seam of the sleeve lining. The distance between the notches on the forearm are left open.	301 or 401	SSa-1	10-14
	(2) Position the sleeve lining top notches to the top of forearm sleeve seam and top of the back arm sleeve seam.			
	(3) Tack the forearm seam and back arm seam of the sleeve lining to the forearm seam and back arm seam, respectively. The back arm seam tacking extends from approximately the midpoint of the back arm seam to not more than 6 inches above the creased bottom edge. The forearm seam tacking extends for a distance of 1-1/2 to 2 inches below the bottom left open forearm seam notch.	Hand or 301	SSa-1	2-3 4-8
	e. Pull the sleeve through the sleeve lining.			
11.	Fell turn-up of sleeve linings and press sleeves.			
	a. Turn under the bottom edge of the sleeve lining to finish approximately 1 inch above the finished end of the sleeve. Fell the folded edge of sleeve lining to the turn-up of the cuff with blind stitching.	301 or Hand	EFc-1	6-8 8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
11. cont.	b. As an option, the bottom edge of the sleeve may be basted to the turn-up prior to felling.			
	c. Turn the sleeves and assemble in pairs. The lower half of the sleeve may be pressed smooth and flat, creasing at the back arm and forearm. The back arm crease is on the back arm seam.			
12.	Assemble linings.			
	a. Matching the notches, join the right and left back linings along the center back seam with a 3/8-inch seam, stopping at the top of the vent; join the side back linings to the right and left back linings with a 3/8-inch seam; and join the front linings to the back assembly at each side seam with a 3/4-inch seam.	301	SSa-1	10-14
	b. Press the side and side back joining seam open and flat. Press the lower front dart towards the side.			
	c. Fold the back lining at the center back seam to form a 1/2-inch wide pleat at the center back. The folded edge of the pleat faces the left side of coat (as worn). As an option, the pleat may be stitched across the top of the pleat at the neckline.			
	d. Press the pleat smooth and flat from the neckline to the vent area with a heated pressing iron.			
13.	Assemble inside pocket.			
	a. The pocket is made of 2 plies of polyester or polyester twill or plain weave material (see 3.4.3).			
	b. Position both plies of the pocketing face-to-face with the notches matching and stitch together from the top notch across the top, back, and bottom and up the front to the bottom notch with a 3/8-inch seam, leaving a 4-1/2-inch pocket opening.	301	SSa-1	10-14
	c. Attach the pocket to the right front facing and the right front lining in accordance with the notches with a 3/8-inch seam, leaving a 4-1/2±1/8 inch pocket opening. In the finished coat, the pocket opening begins 1/2 inch below the bottom edge of the loop tape.	301	SSa-1	10-14
	d. Raise stitch the pocket material onto the facing and lining with a 1/16-inch topstitch.	301	SSc-1	10-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
14.	Attach front facings to linings and sew-on label.			
	a. Position the lining on the facing, with the notches matching, and seam the front edge of the lining to the back edge of the facing 3/8 inch from the edge. The stitching extends from the top (shoulder) edge of the facing to the top of the pocket, and from the bottom of the pocket to the bottom notch of the facing approximately 1-1/4 inches from the bottom edge, excluding the pocket opening.	301 or 401	SSa-1	10-14
	b. Press the facing/lining joining seam with the seam allowance toward the side.			
	c. Sew the identification/instruction label to the left front lining with a single row of stitching 1/16 inch from each edge of the label. The label is positioned horizontally with one end adjacent to the facing/lining seam and the lower edge of the label approximately 3 inches above the bottom edge of the finished coat.	301	LSbj-1	10-14
15.	Make armhole shields.			
	a. Bind the rounded edge of armhole shield with bias binding (see 3.4.4), turning under the outer or both raw edges of the binding, and catching the turned under portion(s) in the stitching, 1/16 inch from folded edge(s).	301	BSc-1 or BSb-1	10-14
16.	Join backs.			
	a. Position the center back edges even and join with a 5/8-inch seam from the top edge of the backs to approximately 3/4 inch below the top end of the vent. From that point, continue to stitch diagonally across the top end of the vent, stopping 3/8 inch from the end.	301	SSa-1	10-14
	b. Turn the left vent to the inside of the left center back in accordance with the notches and edge stitch 1/8 inch from the folded edge. The folded edge of the vent is in line with the center back seam line.	301	OSf-1	10-14
	c. Join the left and right side backs to the respective center backs with a 3/8-inch seam.	301	SSa-1	10-14
	d. Press the side and center back seams open and flat with a heated pressing iron or pressing machine.			
	e. Notch the top end of the right vent diagonally from the juncture point of the vent and center seam allowance of the right center back to 1/16 inch from the center back seam. The notch does not extend to the seam.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
17.	Topstitch top end of vent.			
	a. Stitch and backstitch across the top end of the vent through all plies from the back center seam to the edge of the vent for a distance of 1 inch.	301	SSa-1	10-14
18.	Seam reinforcement stays to front armholes and shoulders.			
	a. Seam the 5/8- to 3/4-inch wide stay pieces (operation 1.d) to the underside of the front along the shoulder edge and upper front edge of the armhole, 1/8 inch from the outer edges. The top end of the armhole stay and the lower edge of the shoulder stay form a right angle at the armhole without the stays overlapping each other.	301	SSaa-1	10-14
19.	Assemble front panels.			
	a. With notches matching, position the front panel and side front panel together with the edges even and join with a 3/8-inch seam. With the notches matching, position that assembly to the side front dart panel with the edges even and join with a 3/8-inch seam.	301	SSa-1	10-14
	b. Spread all the seams open and press flat with a heated pressing iron.			
	c. Press and shape the fronts on a heated pressing machine, shrinking the fronts to eliminate the excess fullness of the chest without distortion to the fronts or armholes. Maintain the contour of the seams without stretching the seam.			
20.	Join back and front at sides and tape armhole.			
	a. Position the back and fronts with the edges even and join at the sides with a 3/4-inch seam.	301	SSa-1	10-14
	b. Spread the side seams open and press flat with a heated pressing iron.			
	c. Attach the 1/4-inch wide woven tape to the inside of the coat at the lower edge of the armhole, starting approximately 2 inches above the notch in the fronts and continue to the side seam. Cut the tape and continue stitching along the bottom and back edge to lower notch. Holding the tape taut, continue to stitch the tape to the back armhole to 3/4 inch from the shoulder.	301	SSaa-1	10-14
	d. Press the armhole tape and the shoulder area smooth and flat with a heated pressing iron or pressing machine.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
21.	Attach belt loops to side seam.			
	a. Position the bottom end of a belt loop on each side seam in accordance with the side seam belt loop marker and secure the inside bottom of the loop with a 3/8-inch wide bartack, centered over the loop. Fold the belt loop up to the finished position on the side seam and turn under the top raw edge. Bartack the top of the belt loop to the coat 1/8 inch from the folded edge, catching the turned-under portion of the loop in the stitching with the bartack centered over the loop.	Bartack		20 per bartack (minimum)
22.	Shape fronts.			
	a. Mark the fronts 1-1/8 inches from the bottom edge of the coat and trim excess material at the front and back, when necessary. The right front overlaps the left front 3-3/4±1/8 inches and the left front does not extend below the bottom edge of the right front at the bottom edge.			
23.	Attach floating chest piece.			
	a. Position the floating chest piece assembly on the underside of the front with the haircloth facing the fused interfacing, aligning the outer edges and neckline. The padding is placed so that it will not be caught in the shoulder seaming of the coat. Baste through the front and floating chest piece assembly, allowing room for placement of the shoulder pad. A jump basting machine may be used. Keep the assembly slightly full in order to support the form and shape of the fronts.	101or 301 or Hand	Hopper	Variable
	b. Trim excess from the front edge and trim the shoulder in excess of 3/4 inch.			
24.	Baste and join facing-lining assemblies to fronts.			
	a. Position the cross-cut fusible tape on the inside of the top and front edge, from the collar notch to 1 inch above the bottom edge of the coat, and fuse in place in accordance with the manufacturer's recommendations for time, temperature, and pressure.			
	b. Position the facing-lining assembly on the outside of the front. Baste along the front and continue basting along the bottom edge. The facing is held slightly taut across the bottom edge of the front while basting.	301	Hopper	Variable
	c. Join the facing to the front 3/16 inch from the top and front edge of the coat, stitching thru the fusible tape.	301	SSa-1	10-14
	d. Clip the depth of the collar notch to the seam line.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
24. cont.	e. Remove the basting from the facing and notch at the collar terminal. Trim upper front corner of the facings.			
	f. Spread the seam joining the facing to the front from the collar notch to the bottom edge of the coat and press smooth and flat with a heated pressing iron. The corner is worked out.			
25.	Baste fronts – 1st time.			
	a. Turn the facing-lining assembly to the inside of the fronts, completely working out the corners. Turn up the bottom of the coat, lapping the back edge of the facing on the ends of the bottom turn up and working the front corners out completely.			
	b. Baste along the front edge, working the seam to the edge of the coat. The basting extends from the collar notch to the finished bottom edge of the coat.	101 or Hand	SSm-1	4-6
26.	Baste fronts – 2nd time.			
	a. Baste the facings to the fronts approximately 1-1/2 inches from the top, front, and bottom edge of coat, holding the lower corner of the coat in such a manner as to cause the lower front edge of the fronts to roll inward towards the back edge of the facing while basting.	301 or Hand	Hopper	Variable
	b. Notch at the collar terminal. Turn under and baste the top edge of the right facing to the front from the collar notch to the front edge, catching the turned under portion of the facing in the basting.	301 or Hand	Hopper	Variable
	c. Baste the facings to the fronts starting approximately 3 inches down from the shoulder edge of the facing and as close as possible to the facing-lining seam, placing the fullness over the chest. Continue to baste the facing along the inner folded edge of the binding from the bottom end of the facing-lining to the mark at the lower edge of facing, properly distributing the fullness in the facing. Turn up the bottom edge of the facing at the mark and baste along the folded edge.	301 or Hand	Hopper	Variable
27.	Fell facings to fronts and tack to interfacing.			
	a. Fell the facing to the right and left chest pieces. The felling stitching does not show through to the outside of the coat.	301 or 306	BSa-1	6-8 6-8
	b. Tack the right and left facing-lining seam allowance to the respective front interfacing.	Hand or 103 or 306	SSm-1	2-4 4-6 4-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
28.	Blindstitch bottom turnup.			
	a. Blindstitch the bottom turnup.	103 or 306 or hand	EFl-1	4-6
29.	Fit, baste, and trim body lining to coat.			
	a. Fold the front lining at the shoulder in accordance with the notches, forming the chest pleat, and baste the entire length of the pleat. Continue to baste from the lower edge of armhole, along the side seam and across the bottom edge of lining. The folded edge of the chest pleat on the outside of the lining faces the armhole.	301 or Hand	Hopper	Variable
	b. Left side of the coat: From the side seam of the lining at the waist, baste across the back lining to the center vent. Fold the lining up from the bottom and continue basting the lining approximately 1/2 inch from the bottom edge of coat.	301 or hand	Hopper	Variable
	c. Right side of the coat: From the side seam of the lining at the waist, baste across the back lining to the top of the vent. Fold the lining up from the bottom and continue basting the lining approximately 1/2 inch from the bottom edge of the coat.	301 or hand	Hopper	Variable
	d. Baste the center pleat from the top of the vent with a zero pleat, tapering up to the matched notches at the neckline, adding fullness to approximately 2 inches from the neck. The folded edge of the pleat on the outside of lining is toward the left side.	301 or hand	Hopper	Variable
	e. Baste the back lining along the lower edge of the armhole approximately 2 inches from the edge and continue up and across the shoulders and neckline to the other armhole, leaving room for insertion of the shoulder pads.	301 or hand	Hopper	Variable
30.	Trim front lining and interfacing at armhole.			
	a. Trim the excess coat front interfacing and front lining at the armhole.			
	b. Or, when the shoulder lining seams are joined by machine, trim the excess coat front interfacing and front and back lining at the shoulders to allow insertion of the shoulder pads.			
	c. Trim the lining even with the back at the neck.			
31.	Baste shoulder pads.			
	a. Insert the shoulder pad between the shoulder piece and chest padding piece of the floating chest piece in line with the armhole edge and securely tack the pad to the interfacing and chest padding only.	301 or Hand	Tack	2-4 2-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
32.	Join shoulders.			
	a. Join the front to the back at the shoulders with a 3/8-inch seam, working in fullness on the back.	301	SSa-1	10-14
	b. Spread the shoulder seam open and press flat with a heated pressing iron or pressing machine over a block, holding the shoulder short. The pressed shoulder does not show any distortion.			
33.	Set shoulder traps.			
	a. Position the shoulder strap on the shoulder seam in accordance with shoulder strap placement marker.			
	b. Seam the shoulder strap to the coat 3/16 to 1/4 inch from the armhole edge. Trim the shoulder strap even with the armhole, where necessary.	301	SSa-1	10-14
34.	Join lining shoulder seams.			
	a. Trim the shoulder edge of the front lining and the back lining to approximately 3/8 inch past the shoulder at the armhole edge and tapering to 1/8 inch at the neck. Join the back lining to the facing-lining assembly with a 3/8-inch seam, working in the proper fullness on the back.	301 or 401	SSa-1	10-14
35.	Seam neckline and attach size label and hanger loop.			
	Join the facing and the back lining to the coat at the neckline from collar notch to collar notch with a 1/4-inch seam. The upper edge of the size label and the ends of the hanger loop are properly positioned and caught in the stitching at the inside center back.	301	SSa-1	10-14
36.	Set collar.			
	a. Mark the neckline on the outside 1/2 inch from the top edge, from collar step to collar step, for proper positioning of the collar.			
	b. Position the collar with the lower edge lapped on the outside top edge of coat at the mark.			
	c. Seam the collar to the coat from end to end, 1/16 to 1/8 inch from the lower edge of collar. The stitching is not through the collar lining. The collar position does not deviate more than 1/8 inch from the collar steps on each end of collar.	301	LSa-1	10-14
37.	Edgestitch coat.			
	Edgestitch the top and front edges of the coat and continue the stitching along the bottom edge of the coat the width of the facings. Edgestitch the left edge of the vent.	301	SSe-2(a)	10-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
38.	Set sleeves.			
	a. Position the outside of the sleeve on the outside of the coat with the notches matching and with the sleeve lining turned back from the armhole edge.			
	b. Join the sleeve to the coat with a ⅜-inch seam, distributing the fullness between the notches and catching the ends of the shoulder strap in the stitching.	301	SSa-1	10-14
	c. Notch the armhole seam allowance on the back and front adjacent to each side of the shoulder strap.			
	d. Press fullness of the sleeve flat all around the armhole, with the seam facing toward the sleeve, with a heated pressing iron on a shaped pressing buck, shrinking the fullness and holding armhole short. The armhole is not stretched during pressing.			
39.	Baste armholes.			
	a. Baste around the entire armhole on the inside, holding the back lining, shoulder pad, and front lining in place and distributing the fullness evenly. Turn the coat on the outside.	Hand or 301	Hopper	Variable
	b. Baste around the outside armhole adjacent to the armhole seam, forcing out the armhole in the basting. The basting extends the entire circumference of the armhole.	Hand or 301	Hopper	Variable
40.	Stitch sleeve head pads and linings at sleeve armholes.			
	a. Position the sleeve head pad on the sleeve with the folded edge of the pad approximately 1/8 inch back from the raw edge of the armhole sleeve seam. The pad begins at the notch in the front and extends around the armhole, ending approximately 2 inches beyond the back arm seam. Trim any excess pad if necessary: 15 inches for sizes XO-6, 16 inches for sizes 8-14, and 17 inches for sizes 16-18.			
	b. Stitch the sleeve head pad to the sleeve from end to end, through the armhole sleeve seam allowance, 1/8 inch from the folded edge of the pad, catching the armhole, the front and back linings, and the shoulder pad in the stitching. Continue stitching the lining around the remainder of the armhole. Trim away excess material.	301	SSa-1	4-6
41.	Attach armhole shields to coat.			
	a. Position the armhole shield on the lining side of the coat with the raw edges even with the lower edge of the armhole.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
41. cont.	b. Baste or tack the armhole shield at the base of the armhole.	301 or Hand	SSa-1	4-8 2-3
	c. Or, as an alternate to operation b, the armhole shield may be joined to the lining by superimposing the stitching on the seam joining the binding to the shield.	301	LSbj-1	10-14
42.	Attach sleeve linings.			
	a. Position the sleeve lining at the armhole with the back and forearm seam of the sleeve and sleeve lining matching. Turn under the armhole edge of the sleeve lining and lap the lining on the outside of the front and back lining at the armhole. Fell the sleeve lining to the coat around the entire armhole, placing the stitching over the folded edge of the lining and distributing the fullness in accordance with good commercial practice. Backstitch the lower armhole edge, beginning approximately 1-1/2 inches to the front of the forearm sleeve lining seam and extending the stitching to the side seam of the body lining.	Hand	SSa-1	8-10
	b. Or, as an alternate, stitch the sleeve lining by machine to the armhole on the inside from the forearm to the back arm sleeve across the under sleeve.	301	SSa-1	10-14
	c. Or, as an alternate construction by machine:			
	(1) Stitch the sleeve lining to the armhole on the inside from the front sleeve notch to the back arm seam across the under sleeve.	301	SSa-1	10-14
	(2) Stitch the top sleeve lining to the armhole on the inside from the front armhole notch to the top back arm lining seam across the crown of the top of the sleeve lining.	306	SSa-1	10-14
	(3) Close the previously left opened forearm seam 1/16 to 3/32 inch from edge.	310	SSc-1	10-14
	NOTE: When the alternate construction to fell the armhole lining by machine is used, it consists of leaving an opening between the notches of the forearm sleeve lining seam, stitching the lining to the armhole on the inside from the front sleeve notch of sleeve to back arm seam across the under sleeve (301 stitch), and, utilizing the forearm sleeve opening, stitching the top sleeve lining to the armhole on the inside by felling machine from the front sleeve notch to the back arm seam across the crown of the top sleeve lining. Close the previously left opened forearm seam.			
43.	Press front edges.			
	a. Press the left and right front edges, individually, smooth and flat with a heated pressing iron or pressing machine.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
44.	Make front buttonholes and attach fastener tape.			
	a. Mark the right front in accordance with the marks on the pattern for the location of four buttonholes and the loop fastener tape. The mark for the top buttonhole is 3/4 to 1 inch below the top edge of the front, and the marks for the remaining three buttonholes are evenly spaced between the top buttonhole and the center of the loop tape.			
	b. Make one horizontal, eyelet end, square bar type buttonhole, 1-1/4 inches long at each buttonhole mark.	Button-hole		50 per buttonhole (minimum) not including tack
	c. If the end of the gimp finishes on top of the buttonhole, pull the end through to the underside. Securely bartack the end of each buttonhole, catching the end of the gimp in the bartack and covering the width of the bar. The bartack is centered over the bar and is not more than 1/4 inch long and 1/16 inch wide. Trim the end of the gimp.	Bartack		20 per bartack (minimum)
	d. Position a 1-inch wide piece of loop fastener tape on the right facing according to the marks on pattern. Stitch the tape to the facing through all plies, stitching around all four sides of the tape 1/8 inch from the edge. The vertical raw edges are turned under. The fastener tape finishes 1-3/4±1/8 inches long by 1 inch wide.	301	LSbj-1	10-14
	e. Mark the position of the 1-inch wide piece of hook fastener tape on the left front according to the marks on pattern. Stitch the tape to the front through all plies, stitching around all four sides of the tape 1/8 inch from the edge. The vertical raw edges are turned under. The fastener tape finishes 1-3/4±1/8 inches long by 1 inch wide.	301	LSbj-1	10-14
45.	Sew hook and eye to collar.			
	Position and securely sew the hook to the right end and the eye to the left end of the collar. The hook and eye are positioned with their front edges even with the respective front ends of the collar and are securely sewn to the collar at the top and bottom of the forward edge of the hook and eye. The stitching on each side is not more than 3/8 inch from the front end of the collar through the individual holes at the rear of the hook and eye.	Hand		16 per hook, 16 per eye
46.	Finish collar.			
	a. Securely tack the lower corners of the collar to the coat.	Hand		8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
46. cont.	b. Turn under the end and top edge of the lining at the right end of the collar and position the folded edge of the lining under the hook. Fell the folded end of the collar lining to the end of the collar and continue felling along the top folded edge to the end of the stitching, joining the lining to the collar.	Hand		8-10
	c. Or, as an alternate, the collar lining may be attached to the coat using a simulated hand felling machine.			
	d. Turn under and fell the lower folded edge of the collar lining to the coat from end to end, catching the turned under portion of the lining at the right end in the felling.	Hand or Machine		8-10 6-8
	e. Position the collar tab on the inside of the collar at the left end, with the collar tab extending approximately 3/4 inch beyond the front end of the collar. Fell the top, back, and bottom raw edges of tab to the collar lining.	Hand		8-10
47.	Clean coat.			
	a. Pull and remove all basting thread; trim and remove all loose ends of thread; and remove all spots, stains, tickets, and marking without injury to the material.			
48.	Press coat.			
	a. Press the fronts smooth and flat, straightening and shaping the front edges and working the fullness towards the chest. The bottom edges of the fronts are even.			
	b. Press the entire collar smooth and flat.			
	c. Press the upper fronts on a left and right body machine, shrinking in and properly shaping the chest.			
	d. Press the lower fronts smooth and flat.			
	e. Press the sides, working the fullness towards the back.			
	f. Press the back smooth and flat, removing all fullness and lapping the left vent on the right vent.			
	g. Press the sleeves smooth and flat, creasing at the back arm and forearm. The back arm crease is positioned on the back arm seam and in line with the forearm crease. The crease extends from the sleeve hem to a point on the sleeve in horizontal alignment with the top folded edge of the side seam belt loop.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

TABLE A-I. Construction criteria – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
48 cont.	h. Block the shoulders to remove fullness and press shoulders smooth on a shoulder shaping machine.			
	i. Press the armholes solid from the inside, creasing the armholes at the front, back, and armpit. The armpit and the back of the armhole are held short while pressing.			
	j. Block the armholes on a pressing buck, shrinking in the top sleeves.			
	k. Press the lower edge of the coat smooth, flat, and even.			
	l. Remove all wrinkles and impressions from the coat.			
	m. Press the linings throughout, removing all wrinkles and creases. Press the front shoulder pleats, back lining pleat, and vent linings smooth and flat.			
49.	Mark and attach buttons.			
	a. Mark the left front for the location of four 40-ligne insignia buttons to properly engage with the buttonholes on the right front. The mark for the top button is in line with the left front end of collar and the remaining buttons are in vertical alignment with the top mark and equal distance from the front edge of the coat.			
	b. Sew one 40-ligne insignia button at each of the marks on the left front. The buttons are securely sewn through all plies of material and properly engage the buttonholes on the right front. The buttons finish with the head of the eagle in an upright position.	101or 301 or Hand		21/ button 6-8/button (double thread)
	c. Mark each shoulder for the location of one 27-ligne insignia button to properly engage with the buttonhole in the shoulder strap.			
	d. Sew one 27-ligne insignia button at the mark on each shoulder. The button is sewn through all plies of material. The head of the eagle is positioned towards the bottom edge of the collar.	101 or 301 or Hand		21/ button; 6-8/button (double thread)
	c. Mark the collar lining for the location of five 16-ligne sewing hole buttons in accordance with the pattern marks.			
	d. Sew one 16-ligne sewing hole button at each of the marks on the collar lining. The button stitching does not show on the outside of the collar.	Hand		8 per button (double thread)
50.	Attach belt to coat.			
	a. Thread the belt through the belt loops.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Preparing activity:

Navy – MC

(Project 8405-2026-005)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:04Z
Check the source to verify that this is the current version before use.