MILITARY SPECIFICATION

PUBLICATIONS, TECHNICAL, INSTRUCTION-TYPE: PREPARATION OF

This specification is approved for use by the U.S. Marine Corps, Department of Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers general style and format requirements for the preparation of instruction-type technical publications for support of in-service equipment/weapons systems.

1.2 Classification. Instruction-type technical publications shall be of the following types, as specified (see 6.2):

Type	I	-	Modification Instruction (MI)
Type	II	-	Technical Instructions (TI)
Type	III	-	Supply Instructions (SI)

Unless otherwise specified herein, requirements shall apply to all types.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletion) and any pertinent data which may be of use in improving this document should be addressed to: Commanding General, Marine Corps Research, Development and Acquisition Command (Code PSD), Washington, D.C. 20380-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A TMSS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-M-38784 - Manuals, Technical: General Style and Format Requirements

MIL-P-38790 - Printing Production of Technical Manuals: General Requirements For

STANDARDS

MILITARY

MIL-STD-12 - Abbreviations for Use on Drawings, Specifications, Standards And In Technical Documents

PUBLICATIONS

DEPARTMENT OF DEFENSE

DOD 5220.22-M - Industrial Security Manual for Safeguarding Classified information

MCO P4130.8 - Configuration Managment Manual

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

U.S. GOVERNMENT PRINTING OFFICE

Style Manual Library of Congress Catalog No. Z253.U58

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specified exemption has been obtained.

3. REQUIREMENTS

3.1 Material. Any material to be used for development of a Modification Instruction (MI) that effects a baseline change in equipment under configuration management shall not be converted into an MI except by means of an approved Engineering Change Proposal (ECP) in accordance with MCO P4130.8. Additionally, material for all instruction-type technical publication shall be furnished in the form (manuscript copy for review, original artwork, reproducible (camera-ready copy), specified in the contract or order (see 6.2). All material prepared under this specification shall be Government property.

3.2 Manuscript copy for review. The manuscript (or draft) copy shall be typewritten, one side of each sheet, double spaced, approximately 8-1/2 x 11-inch page size, and furnished in the quantity specified (see 6.2). It shall contain all text, tables (if any), and illustrations (if any) necessary for a complete instruction-type technical publication. Illustrations shall be placed as close to subject matter as possible. Each I-type publication will be typed using the PICA "10-pitch" typing element. ALL text will be typed (right margin justified) on 8 1/2 x 11-inch paper. The cover page of the publication will be typed on letterhead Typing Guide (Form USMC I-Type Publication Cover Grid Sheet) (Figure 1) setting the left margin at "15" and the right margin at "76". Continuing pages of the text shall be typed using Typing Guide for Marine Corps Technical Publications (Figure 2) or white typing paper setting the left margin at "8" and the right margin at "76". Typing image area will not exceed 7 x 10 inches including publication and page number.

3.3 Original artwork. Original artwork shall be prepared in accordance with MIL-M-38784.

3.4 Reproducible (camera-ready) copy. Reproducible (camera-ready copy shall consist of text pages including artwork pasted/stripped on the text page ready for the intermediate photographics step leading to the production of the printing plate. Full page illustrations, including those for foldout pages, which have been prepared in exact printing size (or in same size as text pages)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

shall have the marginal copy mounted thereon. Full page photographs that are over-size shall either have the marginal copy separate, or have the marginal copy also prepared proportionately oversize and mounted on the photograph. These photographs shall be black and white glossy and unscreened as they will require reduction/cropping and strip-in camera process.

3.4.1 Reproducible copy leading and spacing. Layout shall conserve space without lessening usability or clarity of the material. Blank pages and blank spaces on pages shall be avoided, wherever possible. Leading and spacing, as indicated in Figures 3 through 14 shall be used for best readability and conservation of space. Double spacing of text within a paragraph or similar wastefulness is unacceptable; however, slight variations are permitted in order to avoid layout practices that would result in the following:

(a) The first line of a paragraph being at the bottom of a page or the last line beginning on a new page.

(b) A subhead falling on the last line of a page.

(c) WARNINGS, CAUTIONS, and NOTES being divided so that first lines appear on one page remaining lines on another.

3.4.2 Page size for reproducible copy. Text and art material for a reproducible page requiring no reduction photographically for printing shall not exceed 8-1/2 x 11 inches.

3.4.3 Reproduction area. The actual overall image area, including marginal copy, utilized for each 8-1/2 x 11 inch sheet shall be 42 picas (approximately 7 inches) wide by 60 picas (approximately 10 inches) deep.

3.4.3.1 Oversize sheets. Oversize sheets may be used with the actual overall image area utilized to be of such size that the text will be approximately 10-point when the sheets are photographically reduced to the prescribed size of the image area (42 by 60 picas).

3.4.4 Marginal copy. Marginal copy generally consists of the publication number and the page number. When applicable, it may also consist of the security classification, change number, figure number and title, and enclosure number.

3.4.4.1 Publication number. The publication number shall appear on the first page, flush right, on the fourth line below the letterhead. On succeeding pages, the number shall appear on the top line of the image area of the typing guide: flush left for even-numbered pages, and flush right for odd-numbered pages (see Figure 3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

3.4.4.2 Page number. The page number shall appear in the lower outer corner of each page. Flush left for even-numbered pages, and flush right for odd numbered pages (see Figure 3).

3.4.4.2.1 Blank page number. Each blank page shall be assigned a number, but it shall appear on the preceding page (see Figure 4).

3.4.4.3 Change number. Each changed page shall show the appropriate sequential change number next to, and on the same line with, the page number. For example, "Ch 3 (14 May 1989) 5" (in the instance of an odd-numbered page) and "6 Ch 3" (14 May 1989)" (in the instance of an even-number page). The space between the change number and the page number shall be 3 picas (1/2 inch).

3.4.4.4 Foldout pages. The page number and the figure number and title on each foldout page shall be placed so they will be visible when the printed page is folded (MIL-M-38784 applies).

3.4.4.5 Blank pages. A blank page requires no marginal copy, except when the reverse printed side is classified, in which case the classification markings shall appear at the top and bottom center of the blank page.

3.4.4.6 Enclosure number. The number or each enclosure shall appear above the page number as follows:

Odd-numbered page	Even-numbered page
ENCLOSURE (2)	ENCLOSURE (2)
5	6

The vertical space between the enclosure number and the page number shall be equal to two lines (approximately 2 picas).

3.5 Photolithographic negatives. Normally not required. When photolithographic negatives are required, they shall be prepared in accordance with MIL-P-38790.

3.6 Format and elements. The format and elements of instruction-type technical publications shall be standardized to the maximum extent possible (see Figures 3 through 14).

3.6.1 Category. The category (i.e., "NORMAL" or "URGENT") of an instruction-type technical publication shall be as designated by the procuring activity at the time of the review of the manuscript. Urgent instructions invariably involve the safety/degradation to personnel/equipment and shall have the required modification kit/parts readily available from the supply system. The category shall be placed on the first page, centered, two lines below the heading.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

3.6.2 Publication number. Each publication number shall be assigned by the procuring activity at the time of the review of the manuscript.

3.6.3 Date of publication. The date of each publication, normally the date of signature, shall be determined and added to the reproducible copy by the procuring activity. It shall appear on the next line beneath and flush right with, the publication number.

3.6.4 Standard heading. The standard heading identifies the type of instruction (U.S. MARINE CORPS MODIFICATION/TECHNICAL/ LUBRICATION/SUPPLY INSTRUCTION) and matches the first element of the instruction number (MI, TI, etc.). This heading is centered on the top set of double lines (preprinted) 2 3/4-inches from the top edge of the reproducible letterhead Typing Guide (form USMC I-Type Publication Cover Grid Sheet). Contractor provide Cover Grid Sheet in accordance with Figure 1 and 3.2.

3.6.5 Publication title. The title, which shall never exceed four lines, shall be based on the contents of the "purpose" paragraph of the publication and shall include, as appropriate, a brief account of the work to be accomplished or the information being conveyed and the identification of the component of the major item, the major item itself, and the system (e.g., HAWK) to which the major items belongs. The title shall be centered and balanced within the two sets of double lines on the first (letterhead) page which form the block for the title.

3.6.6 Enclosure or appendix lines. The space immediately beneath the lower of the two sets of double lines on the first (letterhead) page shall be used to list the enclosures or appendixes, if any, in numerical sequence (see Figure 7, 10, and 12 for examples of enclosures). An enclosure is a document that is related to, but is independent of the instruction-type technical publication that transmits it. An appendix is a dependent, supplementary element (e.g., table, chart, etc.) that augments and instruction-type technical publication and is physically attached at the end of the publication (see Figure 13).

3.6.7 Paragraphs. Paragraphs shall appear consecutively in the following sequence. However, only those paragraphs that are germane to the publication shall be used; in no instance shall paragraphs be used solely to preserve format (see Figures 3 through 14).

3.6.7.1 Purpose. The purpose paragraph shall always be the first paragraph. The purpose paragraph describes the directed action for which instructions are being provided or the information being conveyed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

3.6.7.2 Cancellation. The cancellation paragraph shall be used, when applicable, to cancel superseded or otherwise obsolete and rescinded technical publications (see Figures 3, 8, and 9).

3.6.7.3 Applicability. This paragraph shall be used when it is necessary to indicate any special conditions under which the modification or instruction is applicable. If the instruction does not apply to all items under the Item Designator (ID) number, it is necessary to provide the range of serial numbers to which the instruction does apply (see Figure 5).

3.6.7.4 Time compliance period. Marine Corps policy establishes a time compliance period of 1 year, beginning with the date of the instruction-type technical publication, for NORMAL category instructions, and requires that the time compliance period shall be stated specifically in URGENT category instructions and must be less than 1 year. Therefore, the time compliance period paragraph shall be used for all URGENT instructions and those NORMAL instructions whose time compliance periods are other than the 1 year stipulated by policy (see Figure 6).

3.6.7.5 Information. An information paragraph shall be used when it is necessary to:

(a) Expand upon the purpose paragraph.

(b) Give the background of the problem which the publication is intended to correct.

(c) Give the source (e.g., quality deficiency report, beneficial suggestion, engineering change, etc.) of the publication.

(d) List the advantages to be accrued by performing the action required by the publication.

(e) Announce a "record purposes only" publication (see Figure 5).

3.6.7.6 Technical manuals affected. A paragraph shall be used citing the technical manuals to be changed or revised as a result of the application of the instructions contained in the instruction-type technical publication (see Figure 3).

3.6.7.7 Major items affected. The major items affected paragraph shall constitute a description, in tabular form, of the major items affected by the publication. The paragraph shall not be required or used, however, in those instruction-type technical publications whose sole purpose is to authorize the application of the guidance contained in other documents, whether enclosed or not, or whose range of equipment is too vast to list.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

3.6.7.7.1 Description. Major items shall be described by complete, official nomenclature, to include serial or hull numbers, when known or determinable. All letters of the basic nomenclature shall be in upper case, with descriptive words or model designations in upper and lower case. The accuracy of all elements of the description shall be verified, using current Marine Corps or other supporting publications provided by the acquiring activity as reference sources.

3.6.7.7.2 National Stock Number (NSN). The NSN shall be shown for each major item, except in those instances when all major items affected by the publication bear the same item designator number. The acquiring activity will provide the NSN to be assigned.

3.6.7.7.3 Table of Authorized Materiel (TAM) number. The TAM number, as provided by the acquiring activity, shall be shown for each major item.

3.6.7.7.4 Item Designator (ID) number. The ID number, as provided by the acquiring activity, shall be shown for each major item.

3.6.7.8 Components affected. A component, as the term is used in instruction-type technical publications, is the assembly on which the work is being done, regardless of whether the assembly can be identified by NSN or Part Number (PN), or the assembly is listed as a component in Marine Corps or other supporting publication (see Figure 3). The component shall be described by its basic name, model or serial number, or other identifying data (caliber, millimeter, etc.), as is required for describing the major end item (see 3.6.7.7). The NSN and PN shall be shown when they are known or determinable.

3.6.7.9 Materiel affected. All or any of the following subparagraph titles may be used. However, if only one is used, it becomes the primary paragraph (see Figure 3).

3.6.7.9.1 Materiel required. All items necessary to meet requirements of the publication shall be listed either alphabetically or in the order in which they are discussed in the text, as follows:

(a) Items shall be described by name, item No., NSN, PN, and quantity, as shown in Figure 3. If the item has no NSN, list Commercial and Government Entity Code (CAGE)/PN.

(b) Items making up a kit shall be listed beneath the kit description, indented four spaces from the left margin.

(c) Dimensions of each item may also be given.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

(d) Metric equivalents should be included in parenthesis after the inch-pounds units.

3.6.7.9.2 Materiel discarded. Materiel discarded shall be listed alphabetically or in the order in which items to be discarded are discussed in the text. Instructions for disposing of the discarded materiel shall also be given (see Figure 3).

3.6.7.9.3 Materiel retained. This paragraph shall describe the materiel retained to form a new unit, materiel removed, but neither reinstalled nor discarded, or materiel disposed of in other than a routine manner.

3.6.7.10 Bulk and consumable materiels. When applicable, a listing of two or more bulk and consumable materiels required to apply the instruction-type technical publication shall be listed. The listing shall be presented either alphabetically or in the order in which they are discussed in the text. Items shall be described by name, NSN, PN, and quantity. If the item has no NSN, list CAGE/PN (see Figure 4).

3.6.7.11 Special tools, jigs, and fixtures required. Detailed fabrication instructions shall be given for any tools, jigs, or fixtures which must be fabricated to perform the modification, test, etc., of the equipment or to meet the other requirements of the publication.

3.6.7.11.1 Special tools. Special tools are those required as a direct result of the instruction to perform its prescribed procedures (see Figure 8). Such tools shall be listed alphabetically and shall be identified by NSN and PN, when known or determinable. Special tools shall be added to existing special tool kits required to maintain the end item; the Marine Corps stocklist (SL-3) for the tool kit shall be changed to reflect additions. If any special tool is to be procured by open purchase, the complete identification and address of the manufacturer shall be given.

3.6.7.11.2 Jigs and fixtures. Jigs and fixtures required to apply the modification, test procedure, etc., shall be listed alphabetically and shall be identified by NSN and PN.

3.6.7.12 Special instructions. Any special instructions which are not suitable for other paragraphs in the publication may be given in this paragraph.

3.6.7.13 Supply action. Instructions for procuring materiel, kits, or parts, when they differ from established procedures, shall be given in this paragraph (see Figure 8).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

3.6.7.14 Skill and time required. This paragraph shall describe the title of the Military Occupational Specialty (MOS) required to perform the modification, test, operational check, etc. MOS's will be defined by the acquiring activity. If no special skill is required, the MOS title shall be followed by "or technician with equivalent skills." The time it takes to perform the modification, test, or other action required by the publication shall be given in hours. If more than one MOS skill is required, the time shall be shown for each. Time requirements of less than 1 hour shall be shown in tenths of an hour (e.g., 1/2 hour shall be shown as 0.5 hours).

3.6.7.15 Procedures paragraph. The paragraph title shall coincide with the action it requires. "Modification Procedures" shall always indicate a modification in an MI. The use of the word "modification" in a TI shall be avoided. The procedures paragraph of a TI shall be titled in accordance with its contents; e.g., "Action," or "Test Procedures," or "Installation Procedures," etc. (see Figure 9). An SI explains technical aspects of supply matters and shall not address data applicable to Modification or Technical Instructions except as it relates to information on acquisition, regulation or availability. An SI should avoid use of the words "Modification," "Test Procedures," "Installation Procedures," etc., except when referencing an MI, TI or other technical publication (except when the publication directs and authorizes the use of the procedures contained in a document published by another military service or a commercial manufacturer). Specific requirements are as follows:

(a) Parts or materiel shall be identified in the text by item numbers as listed in the "Materiel Required" paragraph. If the item number can not be assigned, the NSN (if the NSN is known or determinable), PN, or military specifications used with the publication shall be used.

(b) All parts shall be listed in the "Materiel Required" paragraph if they are required to perform the action levied by the publication, unless a removed part is retained for reinstallation or is discarded.

(c) A part or materiel shall not be referenced in the text by anything other than its name and item number if assigned. If no item number has been assigned, use NSN or PN first time referenced only. Neither shall parts or materiel be described by physical characteristics (length, thickness, inner and outer dimensions, composition, weight, etc.). Physical characteristics may be listed for parts or materiel in the "Materiel Required" paragraphs.

(d) Tools required to perform the action directed by the publication must be available at all maintenance echelons to whom the publication is addressed; if not available, such tools must be described as "special tools" (See 3.6.7.11.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

3.6.7.16 Recording and reporting the modification, replacement, inspection, etc. Recordable MI's and TI's, as designated by the procuring activity, shall stipulate that the completed action shall be recorded (see Figure 3). Recording the completed action by marking or stamping the equipment, itself, is usually required within the procedures paragraph; therefore, it is not necessary to specify this type of recording in a separate paragraph. Reportable MI's and TI's shall stipulate that the completed action shall be reported (see Figure 3). The recordability and reportability of an MI or TI shall be added to the manuscript copy by the procuring activity at the time of review.

3.6.8 Authentication. The authentication lines shall subscribe to the format shown in Figures 3, 4, 7, and 9. However, in view of personnel assignments, etc., the procuring activities shall necessarily provide the name and title of the official who shall authenticate the publication.

3.6.9 Distribution. The entries for the distribution lines, which show both the action and need-to-know addressees, shall necessarily be provided by the acquiring activity.

3.7 Development of text. The text shall contain only essential information and shall be factual, specific, concise, comprehensive, and unambiguous. It shall be so clearly worded as to be readily understandable at the organizational levels where the publication will be used. The U.S. Government Printing Office Style Manual shall be used as a general guide for capitalization, punctuation, compound word forms, numerals in text, and spelling. Text shall avoid the following:

(a) The use of quotation marks and underlining for the purposed of emphasis.

(b) Technical phraseology requiring a specialized knowledge, except when no other wording will convey the intended meaning.

(c) Superfluous words and phrases. Avoid ambiguity which may result from the divergent meanings of a word; for example, "replace" shall not be used if "reinstall" is intended.

3.7.1 Writing style. The writing style for the text shall be such that the information and instructions shall be understood by an individual having an eighth grade or higher education.

3.7.1.1 Grammatical person and mood. The second person imperative mood shall be used for procedures; for example, "Remove test set from carrying case." The third person indicative mood shall be used for description and discussion; for example, "When switch A is in the ON position, lamp 34 lights." Pronouns may be used when their use will not cause confusion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

3.7.1.2 Use of words "shall," "will," "should," and "may". The words "shall" or "will" are to be used to indicated a mandatory requirement. The word "should" is to be used to indicate a nonmandatory desire or preferred method of accomplishment. The word "may" is to indicate an acceptable or suggested means of accomplishment.

3.7.1.3 Nomenclature consistency. Nomenclature shall be consistent within a publication. Part nouns and modifying word shall agree with those appearing on the applicable approved Defense Logistics Services Center (DLSC) total item record/engineering drawings.

3.7.1.4 Abbreviations, acronyms, and symbols. Use of abbreviations and acronyms shall be held to a minimum and, unless long custom has established their use, they shall be identified the first time they appear. Abbreviations used shall be in accordance with the requirements of MIL-STD-12 or the U.S. Government Printing Office Style Manual. When abbreviations in the GPO Style Manual conflict with the MIL-STD-12, those in the latter shall prevail.

3.7.1.5 References. The text shall refer to the following:

(a) Only models or types covered by the publication.

(b) The basic number of Government specifications and standards.

(c) Materiels, such as lubricants, cleaning fluids, etc., by Government specification number, when applicable.

(d) Temperature readings as calibrated on the equipment with degrees Centigrade, Fahrenheit, or Kelvin, as applicable, to follow. General temperature references shall normally be given in degrees Fahrenheit.

(e) Speed and distance readings as calibrated on the equipment with conversion to U.S. standards to follow in parenthesis if the metric system was used.

(f) Measures in U.S. standard units, except for instances in which metric measurements are required.

(g) Illustrations by figure number, including sheet number for multisheet illustrations. Illustrations shall be prepared in accordance with the requirements of MIL-M-38784.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

(h) Index numbers appearing on illustrations first, followed by the figure number (for example, 34, figure 3). However, when multiple references in a paragraph refer to the same figure, only the first reference need indicate the figure number. Additional references need indicate only the callout number until the sequence is broken by a reference to a different figure number.

(i) Tables by table number.

(j) Other supporting paragraphs in the same publication by paragraph number, preferable with the word "paragraph" (for example, paragraph 3a(1)).

(k) Other publications by publication numbers. Reference may only be made to publications included in the Marine Corps publications system.

(l) Switch positions and panel markings exactly as marked on the equipment.

3.8 Tables, charts, graphs. Any type of data which lends itself to tabular or graphic presentation may be so presented. Tables, charts, and graphs shall be designed so that they are easily understood.

3.9 Arrangement and titles. Major paragraphs, illustrations, and tables shall each have a brief title describing content or action portrayed.

3.9.1 Types of paragraphs. Paragraphs are referred to as primary side heads, untitled paragraphs, and procedural steps.

3.9.1.1 Primary side heads. Primary side heads shall be run in with the text, shall appear in upper and lower case letters and shall be underlined.

3.9.1.2 Untitled paragraphs. Untitled paragraphs are used when the text material cannot be divided into, or does not warrant the assignment of, subject headings.

3.9.1.3 Procedural steps. Procedural steps are normally used to present step-by-step instructions such as disassembly or alignment procedures. They may be divided into substeps.

3.9.2 Figure titles. Illustrations shall be assigned figure titles. The title shall follow the figure number and normally be placed below the applicable illustration. Normally, figure titles should begin with an identifying name, for example, "Fuel Indicator--Exploded View."

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

3.9.3 Table titles. Table titles shall follow the table numbers and shall be placed and centered above the applicable tables.

3.10 Warnings, cautions, and notes. Warnings and cautions shall precede the text to which each applies, but notes may precede or follow applicable text, depending on the material to be highlighted. Warnings, cautions, and notes shall not contain procedural steps nor shall they be numbered. When a warning, caution, or note consists of two or more paragraphs, the heading WARNING, CAUTION, or NOTE, whichever applies, shall not be repeated above each paragraph. If it is necessary to precede a paragraph with both a warning and a note, or a caution and a note, etc., they shall appear in the sequence of their importance; namely, warnings before either cautions or notes, and cautions before notes. Figure 4 illustrates styles. Such inserts in the text shall be short and concise and used only to emphasize highly important, critical instructions; viz:

/WARNING/ - AN OPERATING PROCEDURE, PRACTICE, ETC., WHICH, IF NOT CORRECTLY FOLLOWED, COULD RESULT IN PERSONAL INJURY OR LOSS OF LIFE. THIS PARAGRAPH SHALL BE TYPED IN UPPER CASE IN ITS ENTIRETY.

- - - -

CAUTION - An operating procedure, practice, etc., which,
- - - - if not strictly observed, could result in damage to, or destruction of, equipment.

NOTE - An operating procedure, condition, etc., which is essential enough to require highlighting.

3.10.1 Health, hazards precaution data. When hazardous chemicals or adverse health factors in the environment or use of the equipment cannot be eliminated, appropriate precautionary requirements shall be included.

3.11 Numbering. All pages, paragraphs, illustrations and tables shall be numbered.

3.11.1 Numbering pages. Pages shall be numbered as follows:

(a) Pages of basic instruction-type technical publications. The pages of the basic publication shall be numbered consecutively in Arabic numerals, beginning with 1 (see Figures 3 through 9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

(b) Pages of enclosures. The pages of enclosures prepared expressly for, and along with, the basic publication shall be numbered consecutively in Arabic numerals, beginning with 1 (see 3.4.4.6). Enclosures that constitute other previously published documents to be forwarded by the basic instruction-type technical publication shall bear their own numbers as printed.

(c) Pages of appendixes. The pages of each appendix shall be numbered in Arabic numerals preceded by the capital letter of the appendix; for example, A-3 shall be the third page in appendix A, B-3 shall be the third page in appendix B, etc.

3.11.2 Numbering paragraphs. Paragraphs shall be numbered as follows:

(a) Paragraphs of basic instruction-type technical publications. Paragraphs shall be alternately numbered and lettered consecutively, as follows: 1, a, (1), (a), 1, a to the extent of their subdivisions. When a paragraph is subdivided, it must have at least two subdivisions.

(b) Paragraphs of enclosures. Paragraphs of enclosures prepared expressly for, and along with, the basic instruction-type technical publication shall be numbered and lettered in accordance with 3.11.2(a). Paragraphs of enclosures that constitute other previously published documents to be transmitted by the basic instruction-type technical publication shall bear their own numbers and letters, as printed.

3.11.3 Numbering illustrations (figures) and tables. Illustrations (figures) and tables shall be numbered as follows:

(a) Illustrations and tables in basic instruction-type technical publications. Illustrations (figures) and tables shall be numbered consecutively in Arabic numerals, beginning with 1. Illustrations and callouts in the illustrations will be referenced sequentially in the text.

(b) Illustrations and tables in enclosures. Illustrations (figures) and tables of enclosures prepared expressly for, and along with, the basic instruction-type technical publication shall be numbered consecutively in Arabic numerals, beginning with 1. Illustrations (figures) and tables of enclosures that constitute other previously published documents to be forwarded by the basic instruction-type technical publication shall bear their own numbers as printed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

(c) Multiple-sheet illustrations (figures). Multiple-sheet illustrations (figures) shall be consecutively sheet numbered following the title, for example, "Figure 2. Installing the Antenna, AS/TRC-0 (Sheet 1 of 3)." Remaining sheets shall be numbered in consecutive order; viz: "(Sheet 2 of 3)" and "(Sheet 3 of 3)."

3.11.4 Paragraphs, illustrations (figures) and tables in appendixes. Paragraphs, illustrations (figures), and tables of appendixes shall be numbered in Arabic numerals, preceded by the capital letters of the appendixes; for example, A-1 shall be the first paragraph in appendix A; figure B-2 shall be the second illustration in appendix B; table C-3 shall be the third table in appendix C, etc.

3.11.5 Callouts. Index numbers, reference designations, nomenclature, leader lines, legends (keys), procedures, etc, shall be used, when necessary, to identify significant features. Callouts shall be typeset or prepared by a mechanical method, rather than freehand lettering. Unless otherwise specified by the acquiring activity, type size shall be no smaller than 8-point and no longer than 10-point. Lettering shall be in upper case. Nomenclatures shall appear on illustrations only if it can be done without crowding or reducing type size so as to make reading difficult. (Diagram callouts shall be no smaller than 8-point.) Callouts shall be placed in the background areas of illustrations when practical.

3.12 Changes. A change means a modification of information in an existing instruction-type technical publication. Pen changes and page insert changes to the basic instruction-type technical publication shall be prepared and issued when required by the procuring activity as follows:

(a) Pen changes shall be in the format shown in Figure 11.

(b) Changed pages to be inserted into the basic publication shall be in the format of the basic publication and shall be transmitted as shown in Figure 12.

(c) Regardless of the basic publication's category, the category of a change shall be NORMAL, unless the change requires a specifically URGENT procedure.

(d) Distribution lines appearing on the letter of promulgation (transmittal letter) for a change shall be identical to those of the basic publication, unless the distribution, itself, is being changed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

NOTE: If distribution quantities, by virtue of a change, are being increased, the acquiring activity shall ensure that sufficient quantities of the basic publication and earlier changes, if any, are reprinted to meet the increased distribution requirements.

3.13 Foldout pages and illustrations over one page in size. Fold-out pages shall be used only when the material cannot be satisfactorily presented on a single page, a two-page spread, or a series of pages. Foldout pages shall be prepared only when approved by the acquiring activity. If approved, foldout pages may be prepared for 8-1/2 X 11 inch manuals. Maximum printable area shall not exceed 36 inches in width by 10 inches in height. All foldout pages shall be prepared for printing on one side only and full blank aprons shall be used. Foldout pages shall not be spliced. A manual or volume of a manual shall be so arranged that all foldout pages fall at the end of the chapter or document as specified. Such pages shall follow the last chapter, last appendix, or alphabetical index, whichever forms the last portion of the manual or volume. The figure numbers for fold-outs shall be "FO-1", FO-2", etc., and shall be placed preceding the figure title under the illustration. Foldout pages shall be assigned page numbers FP-1/(FP-2 blank), FP-3/(FP-4 blank), etc. When a fold-out consists of several sheets, the sheets shall be numbered in consecutive order following the figure title. Each sheet shall be assigned a page number. The figure number for a foldout page shall be so placed (lower-outer corner) that the number will be visible when the printed page is folded. Foldout-foldup pages are not permitted.

3.14 Illustrations over one page in size. When an illustration will exceed one page, unless the usefulness of an illustration will be adversely affected, the illustration shall be divided and planned for presentation on facing pages and numbered figure FO-1, Sheet 1 and FO-1 Sheet 2. Sheets 3, etc., can be planned for succeeding pages when required, if this treatment will not affect the usefulness of the manual.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements or sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Contractor inspection. Material furnished in accordance with this specification shall be inspected by the supplier for conformance to requirements specified herein.

4.3 Government inspection. Material furnished in accordance with this specification shall be subject to inspection, verification, and approval or disapproval by the Government prior to acceptance.

4.4 Validation. Modification, installation, test, or other procedures to which the instruction-type technical publication pertains shall be validated by a Government or contractor technician who represents the level of maintenance authorized by the publication to perform said procedures (see 3.6.7.14). The validation shall be certified in writing.

4.5 Review and verification. The review and verification of technical publications shall be accomplished by the acquiring activity.

5. PACKAGING

5.1 Packaging. Unless otherwise specified (see 6.2), the material furnished in accordance with this specification shall be packaged as follows.

5.1.1 Manuscript copy. Manuscript copy shall be packaged flat in the most appropriate containers. The artwork and text material may be separated in one container or may be in separate containers. Copies of large artwork for review purposes only may be folded. The containers shall provide protection against forms of damage that frequently occur during shipping.

5.1.2 Reproducible copy. Reproducible copy shall be packaged flat and double packaged. Artwork shall not be folded or rolled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

The interior material shall be waterproof and free of any chemical substance that would discolor or otherwise render the reproducible copy useless. The exterior package shall be a standard commercial carton at least equal to Interstate Commerce standards and of sufficient strength to protect the reproducible copy against forms of damage that frequently occur during shipping.

5.1.3 Classified material. Classified material shall be packaged in accordance with DOD 5220.22-M.

5.1.4 Negatives. When negatives are required, they shall be packaged similarly to reproducible copy (see 5.1.2).

5.1.5 Original artwork. When original artwork is required, it shall be packaged similarly to reproducible copy (see 5.1.2).

5.2 Container information. In addition to sender and addressee information, the exterior of each shipping container shall bear the following:

Publication identifying number.

Contract or order number.

"Manuscript Copy" (when applicable).

"Reproducible Copy" (when applicable).

"Original Artwork" (when applicable).

Number of containers in the shipment (see 5.3 when applicable).

5.3 Packing list. A copy of the letter of transmittal, or the packing list, shall be placed inside the carton or container. When a shipment consists of several containers, the letter of transmittal, or packing list, shall be enclosed in the first container and shall identify the material that was packaged in each container and shall be marked 1 of _, 2 of _, etc.

6. NOTES

6.1 Intended use. MI's, TI's, and SI's prepared in accordance with the general style and format requirements specified herein are intended for use in the operation and maintenance of equipment/ weapons systems that are in military service as follows.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

6.1.1 MI. An MI gives instructions for uniformally modifying equipment/weapons systems to correct deficiencies in design and to add tactical and technical advantages. An MI's importance in materiel management requires that it be recorded and reported by the serial number of the equipment/weapons system to which it pertains, if possible. An MI includes any instruction that meets the following criteria:

(a) Urgency.

(b) Indispensability to an item or to a system's operation or effectiveness.

(c) Inclusion of guidance on the use of kits or parts which the Marine Corps manages.

6.1.2 TI. A TI disseminates the following:

(a) Professional techniques and maintenance procedures to be applied by designated personnel.

(b) Interim or supplementary technical information that later will be incorporated into a permanent technical manual or other document.

(c) Precautions concerning anticipated or developing technical problems and the instructions to be published to correct them.

(d) Informational technical details (primarily concerning equipment maintenance) that can be more suitably disseminated by an instruction-type technical publication than by another type of publication or document. For example, details on forms to use, special safety measures, serviceability standards, etc.

(e) Testing and inspection procedures.

NOTE: A TI usually does not require the use of parts, special tools, or kits, other than test kits.

6.1.3 SI. An SI disseminates the following (see Figures 13 and 14).

(a) Supply information on equipment acquisition, regulation, and availability. It explains technical aspects of supply matters, but does not provide administrative instructions.

(b) Directs and provides instructions for reporting equipment conditions testing equipment, or requisitioning or disposing of equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number, and date of this specification.

(b) Type of instruction to be furnished (MI, TI, SI) (see 6.2).

(c) Form in which material is to be furnished (see 3.1).

(d) Quantity of manuscript copy required (see 3.2).

(e) When material shall be packaged other than as specified in 5.1.

Preparing activity:
Navy - MC

Project No. TMSS-N182

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.



DEPARTMENT OF THE NAVY
HEADQUARTERS UNITED STATES MARINE CORPS
WASHINGTON, D.C. 20380-0001

FIGURE 1. Sample of Form USMC I-Type Publication Cover Grid Sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

FIGURE 2. Sample of Typing Guide for Marine Corps Technical Publications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
HEADQUARTERS UNITED STATES MARINE CORPS
WASHINGTON D.C. 20380-0001

NORMAL

MI-06245A-35/2A
17 Jan 1989

U. S. MARINE CORPS MODIFICATION INSTRUCTION

RETROFIT AIR CONDITIONER INSTALLATION KIT

IMAGERY INTERPRETATION FACILITY, AN/TSQ-82

1. Purpose. To provide instructions for installing an adapter kit to provide connections for retrofit of the AN/TSQ-82 Imagery Interpretation Facility (IIF), with a Marine Corps military standard air conditioner.

2. Cancellation. MI-06245A-35/2.

3. Information. Air conditioners previously issued or used with the shelter will be removed, and openings reconfigured to accept connections from the military standard air conditioner.

4. Technical Manuals Affected. SL-3-06245A, SL-4-06245A, MI-06245A-14/1, and IIF-AN/TSQ-82 (seven volumes).

5. Major Item Affected

Description	NSN	TAM No.	I.D. No.
IMAGERY INTERPRETATION FACILITY, AN/TSQ-82	6675-00-832-9872	B1200	06245A

6. Component Affected

Description	NSN	PN
AIR CONDITIONER, Military Standard, Horizontal, 60 Hz, 54,000 Btu/Hr.	4120-00-483-2880	12090-601

FIGURE 3. Sample MI (includes step-by-step procedures).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

7. Materiel Affected

a. Materiel Required

Item	Description	NSN	PN	Qty.
KIT,	Modification	5999-01-084-4931	76A5171A0000	1
	consisting of:			
(1)	COVER, Transport 16-In.		76A5136A0006 (01365)	1
(2)	SCREW, Cap, Hexagon Head, 1/4-20 UNC X 1/2 In. Lg.	5305-00-469-3686	MS51105-303	12
(3)	WASHER, Lock, Internal Tooth, 1/4-In.	5310-00-550-1130	MS35333-40	12
(4)	ADAPTER, Air Duct, 16-In.		75A5136A0005 (01365)	1
(5)	RIVET, Blind		MIL-R-24243/ 6B-A403H (81349)	86
(6)	PLATE, Adapter, Inlet		76A5171A0002 (01365)	1
(7)	PLENUM, Adapter, Air Return		76A5171A0001 (01365)	1
(8)	CAULK, Rubber		TT-S-00230C(2) (81348)	AR
(9)	ADHESIVE, Industrial No. 847	8040-00-273-8697	MIL-C-4003	AR
(10)	INSULATION, Polyurethane Foam, 1/2-In.		MIL-I-14511 (81349)	AR
(11)	CLAMP, Hose	4730-00-908-6294	MS35842-16	4

FIGURE 3. Sample MI (includes step-by-step procedures). - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

Item	Description	NSN	PN	Qty.
(12)	DUCT, Flexible 10-Ft. Lg.		MIL-D-38386C (81349)	2
(13)	UNION, 16-In.		76A5171A0003 (01365)	2
(14)	COVER, Transport		76A5136A0006 (01365)	1
(15)	ADAPTER, Air Duct, 16-In.		76A5136A0005 (01365)	1

b. Materiel Discarded. Dispose of discarded materiel in accordance with current Marine Corps directives.

Description	NSN	PN	Qty.
AIR CONDITIONER, Model MAC6V60	4120-00-935-1531	MIL-A-52767	1

8. Special Instruction. In accordance with the current edition of MCO 10230.2, the subject retrofit kit will be requisitioned and utilized for replacement/conversion to Marine Corps standard air conditioners.

9. Skill and Time Required. Metal Worker (MOS 1316), 8.0 hours.

10. Modification Procedure

NOTE

The numbers in parentheses, paragraphs 10a through o, refer to item numbers in paragraph 7a and figure 1.

a. Remove the existing Air Conditioner, Model MAC6V60, and discard in accordance with the procedure in paragraph 7b, preceding.

b. On the outside of the shelter, align the top edge of the Inlet Adapter Plate (6) with the top edge of the existing panel around the upper hole as shown in figure 1. Using the inlet adapter plate as a template, mark and drill the 42 1/8-inch holes at the edge of the panel.

c. Apply the Rubber Caulk (8) to approximately 1 inch around the edges of the hole.

FIGURE 3. Sample MI (includes step-by-step procedures). - Continued

3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

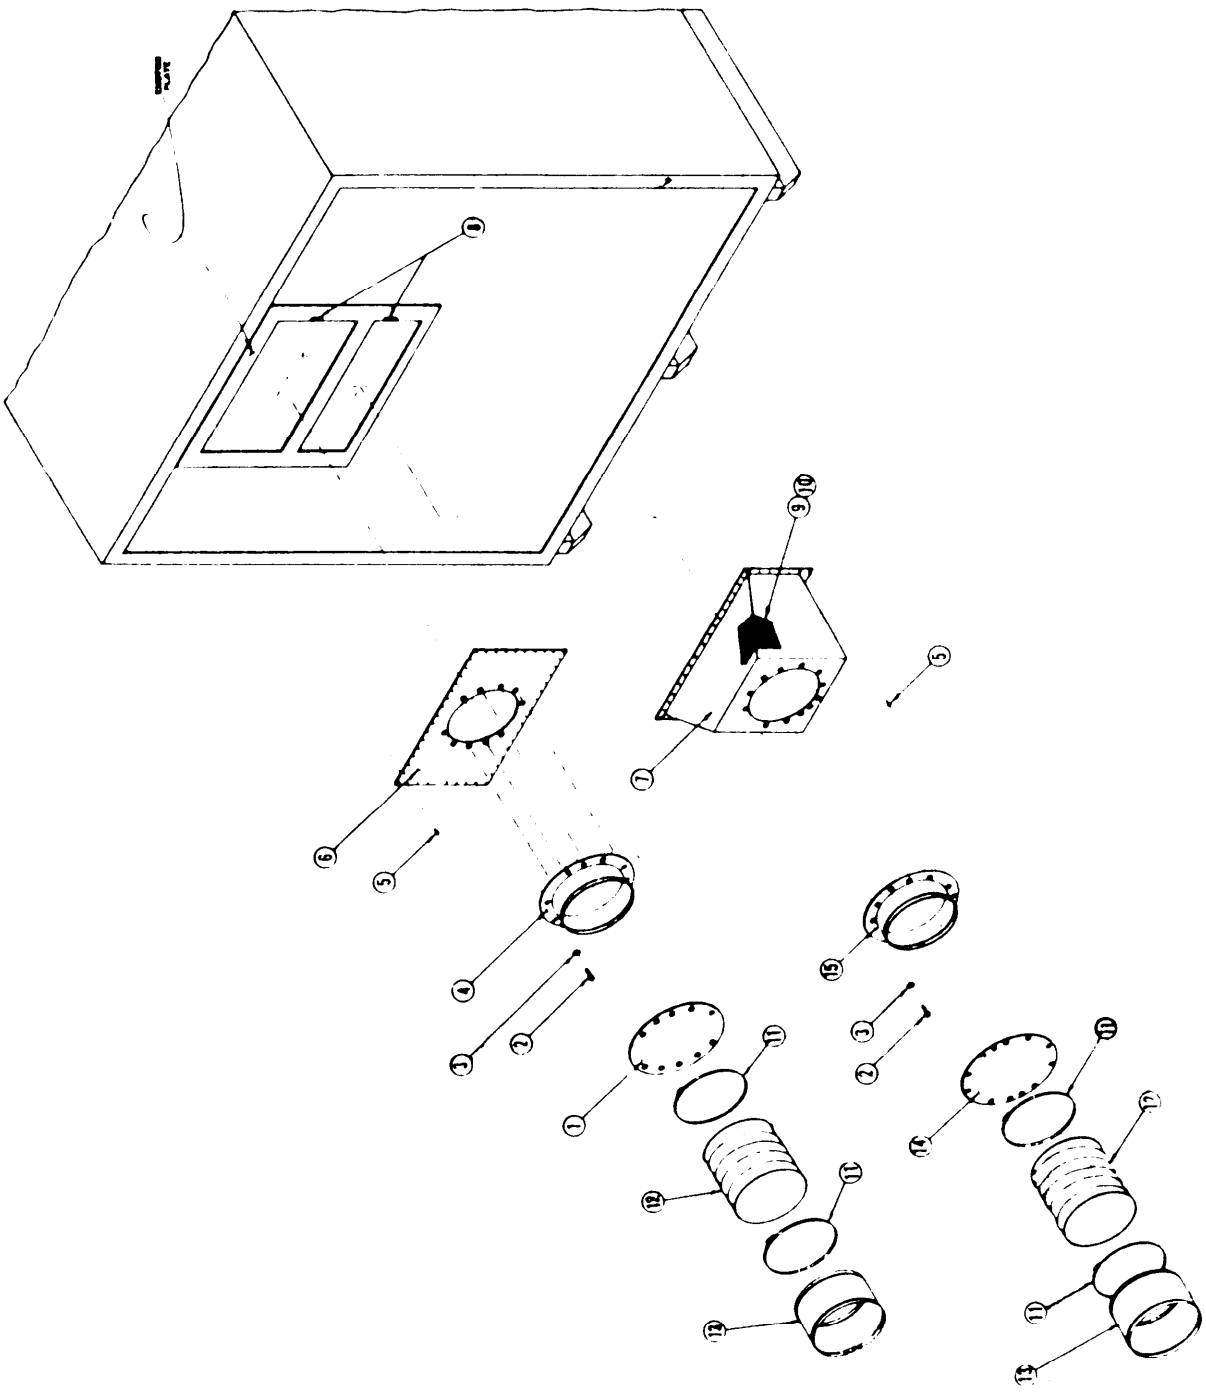


Figure 3. Retrofit Air Conditioner Installation Kit.

FIGURE 3. Sample MI (includes step-by-step procedures). - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

d. Rivet the Inlet Adapter Plate (6), to the shelter with 42 Blind Rivets (5), using a hand riveting tool.

e. Align the bottom edge of the Air Return Adapter Plenum (7) with the bottom edge of the existing panel around the lower hole as shown in figure 1. Using the air return adapter plenum as a template, mark and drill the 44 1/8-inch holes at the edge of the plenum.

f. Apply the Rubber Caulk (8), to approximately 1 inch around the edges of the lower hole.

g. Rivet the Air Return Adapter Plenum (7), to the shelter with 44 Blind Rivets (5), using a hand riveting tool.

h. Cover all rivet heads with Rubber Caulk (8) as a water seal.

i. Install the two Air Duct Adapters 16-inches (4) and (15) to the inlet adapter plate and the air return adapter plenum as shown in figure 1, using 12 Hexagon Head Screws (2), and the 12 Lock Washers (3).

j. Connect one Flexible Duct, 10-feet long (12), to the upper air duct adapter using one of the Hose Clamps (11).

k. Connect the other end of the flexible duct, 10-feet long to the other Union, 16-inches (13), using the last Hose Clamp (11).

l. Connect the other Flexible Duct, 10-feet long (12) to the lower air duct adapter, using one of the Hose Clamps (11).

m. Connect the other end of the flexible duct, 10-feet long to the other Union, 16-inches (13), using the last Hose Clamp (11).

n. Cover the top, bottom, and two side surfaces of the Air Return Adapter Plenum (7), with Polyurethane Foam Insulation (10), using Industrial Adhesive (9).

o. The ducts are now ready to be connected to the air conditioner. Consult the air conditioner TM for operating instructions.

NOTE

The Air Duct Adapter, 16-inches, items (4) and (15) are removed and replaced by the Transport Covers, 16-inches (1) and (14) during transportation or storage of the shelter.

FIGURE 3. Sample MI (includes step-by-step procedures). - continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

MI-06245A-35/2A

11. Recording and Reporting the Modification

a. Record the modification in accordance with the current edition of TM-4700-15/1. Engraving or application of tape with the MI number is not required.

b. Report the modification in accordance with the current edition of MCO P4400.84 or, for those units supported by the Automated Information System, UM 4790-5 (the Marine Corps Users Manual)..

BY DIRECTION OF THE COMMANDANT OF THE MARINE CORPS

OFFICIAL

I. B. HEE
Colonel, U.S. Marine Corps
Deputy Commander
Marine Corps Logistics Base
Albany, Georgia 31704-5000

DISTRIBUTION: 7801006 (10), 2157/6025/7561 (5), 4159/6901/7230005 (2)

Copy to: 7000161 (2), 7000176 (1)

FIGURE 3. Sample MI (includes step-by-step procedures). - Continued

6

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
HEADQUARTERS UNITED STATES MARINE CORPS
WASHINGTON, D.C. 20380-0001

NORMAL

MI-2350-25/76
2 Mar 1989

U.S. MARINE CORPS MODIFICATION INSTRUCTION

INSTALLING EMI AND IMI BONDING STRAPS

ASSAULT AMPHIBIOUS VEHICLE, (AAV7A1) SERIES

1. Purpose. To provide instructions for installing bonding straps on crew hatches and cargo doors.

2. Information. Bonding straps are installed to reduce the Electromagnetic Interference (EMI) and Intermodulation Interference (IMI) caused by the loss of grounding through the hinge points of crew hatches and cargo doors.

3. Technical Manuals Affected. TM-07007B-24, TM-07267B-24, and TM-07268B-24.

4. Major Items Affected

Description	NSN	TAM No.	I.D. No.
ASSAULT AMPHIBIOUS PERSONNEL CARRIER (AAVP7A1)	2350-01-081-8138	E0846	07007B
ASSAULT AMPHIBIOUS COMMAND AND CONTROL (AAVC7A1)	2350-01-080-9087	E0796	07268B
ASSAULT AMPHIBIOUS RECOVERY (AAVR7A1)	2350-01-080-9088	E0856	07267B

5. Components Affected

Description	NSN	PN
HATCH AND CRASH PAD INSTALLATION		2587692
CARGO HATCH INSTALLATION		2600073

FIGURE 4. Typical MI with Sample Bulk and Consumable Materiels/Warnings, Cautions and notes paragraph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18
Check the source to verify that this is the current version before use.

5. Components Affected (Continued)

Description	NSN	PN
HATCH ASSEMBLY, Driver and Commander		2600075
CARGO HATCH INSTALLATION		2617015
HATCH ASSEMBLY, Auxiliary Station		2617033

6. Materiel Affected

NOTE

The Commercial and Government Entity (CAGE) Code for Military Standards (MS) parts is 96906. The CAGE Code for NavSea 2 million series parts is 80064 and for 5 million series parts is 53711.

a. Materiel Required

Description	NSN	PN	Qty.
KIT, Bonding Strap, Crew Hatches and Cargo Doors		02170-80064	1
consisting of:			
STRAP, Hull, Welded		5429255	7

b. Bulk and Consumable Materiels

Description	NSN	PN	Qty.
ADHESIVE	8040-00-865-8991	MIL-A-46106	AR
COATING, Corrosion-Resistant	8030-00-057-2354 (4 oz jar)	ALODINE1200S	AR
DRY CLEANING SOLVENT	6850-00-264-9038	P-D-680, Type II (or equivalent)	AR
ELECTRODE, Welding	3439-00-803-9498	5356	AR
POLYURETHANE COATING	8010-01-162-5578	MIL-C-46168 TYPE 2, Green 383	AR
PRIMER COATING	8010-01-193-0517	MIL-P-53022	AR

2

FIGURE 4. Typical MI with Sample Bulk and Consumable Materiels/ Warnings, cautions, and notes paragraph. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

7. Skill and Time Required. One Metal Worker (MOS 1316) an average of 2.0 hours to install bonding straps and one Assault Amphibian Crewman (MOS 1833) an average of 1.0 hour interrupted by about 6 hours drying time for primer and 8.0 hours drying time between coats of paint to paint welded areas.

8. Modification Procedures

a. Installing Bonding Straps. Install bonding straps on each vehicle as follows:

Location	AAVP7A1 Vehicle	Strap Qty.	AAVC7A1 Vehicle	Strap Qty.	AAVR7A1 Vehicle	Strap Qty.
Weapon Station Hatch Door (EDWS only)	Figure 1	1				
Commander's Station Hatch Door	Figure 2	1	Figure 2	1	Figure 2	1
Driver's Station Hatch Door	Figure 3	1	Figure 3	1	Figure 3	1
Auxiliary Station Hatch Door			Figure 4	1	Figure 4	1
Cargo Hatch Door	Figure 5	2	Figure 5	2	Figure 5	2
Cargo Hatch Door	Figure 6	2	Figure 6	2	Figure 6	2

b. Welding Bonding Straps

/WARNING/

WEAR APPROVED SAFETY GOGGLES TO PREVENT EYE INJURY WHEN GRINDING METAL PARTS.

(1) Grind weld area to bare metal.

FIGURE 4. Typical MI with Sample Bulk and Consumable Materiels/Warnings, cautions, and notes paragraph. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

...nar have been ... details of reservations and proprietary rights ...

/WARNING/

DRY CLEANING SOLVENT IS POISONOUS AND CAN BURN. CONTINUED EXPOSURE TO SOLVENT CAN CAUSE SKIN PROBLEMS. DO NOT BREATHE SOLVENT FUMES. ALWAYS USE SOLVENT IN A WELL VENTILATED AREA AND AWAY FROM HEAT AND FLAMES. IF SOLVENT GETS IN EYES, FLUSH THEM WITH FRESH WATER AND GET MEDICAL HELP. IF SOLVENT GETS ON SKIN, WASH IT OFF IMMEDIATELY.

- - - -
CAUTION
- - - -

Any grease or oil film left on areas to be welded will cause bad welds. Do not touch weld areas after cleaning.

(2) Thoroughly clean areas to be welded on hatches and lugs on bonding straps of dirt, oxides, grease, and oil film per MIL-P-116, process C-1 using Dry Cleaning Solvent (PN P-D-680). Let surfaces air dry.

(3) Scribe location of bonding strap lugs on hull and hatches.

(4) Where permissible, clamp bonding strap lugs in place using C-Clamps.

NOTE

Aluminum lugs on bonding straps may have acid on or in them that could adversely affect the welds. Before welding, lightly grind lugs to remove any acid. Weld end of lug first to seal in acid that might be released by heat when welding the side of the lug.

See TM-9-237 (TO 34-W4-1-5) for information on welding, welding processes, and safety precautions. Use Welding Electrode, MIL-E-16053, Type 5356.

(5) Weld three sides of lug with .19 fillet minimum.

4 FIGURE 4. Typical MI with Sample Bulk and consumable Materiels/ warnings, cautions and notes paragraph. - Continued

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:18Z
Check the source to verify that this is the current version before use.

c. Applying Adhesive-Sealant

NOTE

To get a 360° seal around lug/cable joints, it may be necessary to bend aluminum lug upwards (it is recommended to only bend lug once as excessive bending may cause cracking). After sealant dries, bend lug back to its original position.

(1) After welding clean lug/cable joint at both ends of strap per MIL-P-116, process C-1 using Dry Cleaning Solvent.

(2) Apply a coat of Adhesive to lug/cable joints cleaned in Step (1) above.

d. Painting

(1) Clean bare metal and weld beads per MIL-P-116, process C-1 using Dry Cleaning Solvent.

(2) Apply one coat of Corrosion-resistant Coating to bare metal and weld bead. Allow coating to dry to touch (about 15 minutes).

/WARNING/

CHEMICAL AGENT RESISTANT COATING (CARC) PAINT CAN CAUSE SERIOUS INJURY IF USED IMPROPERLY. CARC PAINT MUST BE APPLIED WITH STRICT ADHERENCE TO TM 4750-15/1 (PAINTING AND REGISTRATION MARKING FOR MARINE CORPS COMBAT AND TACTICAL EQUIPMENT) AND LOCALLY ESTABLISHED SAFETY PROCEDURES.

(3) Apply one coat of Primer Coating to surfaces coated in Step (2) above. Allow 8 hours for primer to dry between coats.

NOTE

Do not prime or paint rubber covering of bonding straps.

(4) Apply two coats of Polyurethane Coating to surfaces primed in Step (3) above. Allow 8 hours for paint to dry between coats.

FIGURE 4. Typical MI with Sample Bulk and Consumable Materiels/Warnings, cautions and notes paragraph[5]. - Continued

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:18Z
Check the source to verify that this is the current version before use.

9. Reporting the Modification. Report the completion of this modification to Commanding General, (CBAV) Marine Corps Research, Development, and Acquisition Command, Washington, D.C. 20380-0001 via message, with information copies to:

a. Commander (PMS-310), Naval Sea Systems Command, Washington, D.C. 20362-5101.

b. Commanding General (Code 834), Marine Corps Logistics Base, Albany, Georgia 31704-5000.

10. Recording and Reporting the Modification

a. Record this modification in accordance with the current edition of TM-4700-15/1. Engraving or application of tape with the MI number is not required.

b. Report this modification in accordance with the current edition of MCO P4400.84 or, for those units supported by the Automated Information System, UM 4790-5 (the Marine Corps Users Manual).

BY DIRECTION OF THE COMMANDANT OF THE MARINE CORPS

OFFICIAL

R. W. PRICE
Executive Director for
Logistics Operations
Marine Corps Logistics Base
Albany, Georgia 31704-5000

DISTRIBUTION: BC plus 7734 (1)

Copy to: 7000161 (2), 7000176 (1)

FIGURE 4. Typical MI with Sample Bulk and Consumable Materiels/Warnings, cautions and notes paragraph. - Continued

7/(8 blank)

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:18Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
HEADQUARTERS UNITED STATES MARINE CORPS
WASHINGTON, D.C. 20380-0001

NORMAL

MI-2350-25/102
14 May 1989

U.S. MARINE CORPS MODIFICATION INSTRUCTION

ELIMINATING FUEL TANK FILL PIPE INTERFERENCE

ASSAULT AMPHIBIOUS VEHICLE (AAV7A1) SERIES

1. Purpose. To provide instructions for eliminating fuel tank fill pipe interference and deleting finish requirement around filler neck.

2. Information. This Modification Instruction (MI) combines two Engineering Change Proposals (ECP) as follows:

a. ECP M31331 - Add Rubber Pads to Fuel Cell Installation. Shifting of the fuel tank in its foam padding can allow the fuel fill pipe to hit the adjacent hull metal, damaging the fuel tank and causing it to leak. This MI adds 1/8-inch thick hard rubber pads to the sloped side of the fuel tank to provide needed clearance in the interference area.

b. ECP M31269 - Chamfer Hull Opening for Filler Neck. This MI removes hull metal in the interference area to provide additional clearance between the stand pipe on the port slope and the fuel tank fill pipe.

3. Applicability. This instruction applies to the following:

a. ECP M31331

(1) Vehicle Type

Rebuild Vehicles	New Vehicles
AAVP7A1 P001 thru P783, P785 thru P795, P797 thru P799, P801, P803, P805, P807, P809 thru P811, P817	P70D0001 thru P70D0347, P70D0349
AAVC7A1 C001 thru C077	C70D0001 thru C70D0033

FIGURE 5. Sample of Applicability Paragraph

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
HEADQUARTERS UNITED STATES MARINE CORPS
WASHINGTON D C 20380-0001

NORMAL

MI-07769A-45/3
6 Sep 1988

U.S. MARINE CORPS MODIFICATION INSTRUCTION

INSTALLATION OF HARDWARE ADAPTER KIT FOR VIEWER, NIGHT VISION ON RECOVERY VEHICLE, FULL-TRACKED, MEDIUM, M88A1

1. Purpose. To provide instructions to install a hardware adapter kit for the viewer, night vision on Recovery Vehicle, Full-Tracked, Medium, M88A1.

2. Time Compliance Period. Action required by this Modification Instruction (MI) shall be completed within 6 months from the date of this instruction and/or prior to shipment of this equipment.

3. Information. The application of this MI for installing the Night Vision Viewer, AN/VVS-2(V)1A provides the M88A1 with a passive night sight capability.

4. Technical Manuals Affected. TM 9-2350-256-10, TM 9-2350-256-20, TM 9-2350-256-20P, and TM 9-2350-256-34P/1.

5. Major Item Affected

Description	NSN	TAM No.	I.D. No.
RECOVERY VEHICLE, Full-Tracked, Medium, M88A1	2350-00-122-6826	E1377	07769A

6. Component Affected

Description	NSN
DOOR, Hatch, Vehicle	2510-00-080-7551

FIGURE 6. Sample of Time Compliance Period Paragraph

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
HEADQUARTERS UNITED STATES MARINE CORPS
WASHINGTON, D C 20380-0001

NORMAL

MI-07722B-50/15
3 Aug 1988

U. S. MARINE CORPS MODIFICATION INSTRUCTION

MODIFICATION OF MISSILE GUIDANCE SET AN/TSQ-136

NSN 1430-01-143-9408, BITE CIRCUIT CARD A6

NSN 1440-01-109-9374 (TOW 2 WEAPON SYSTEM)

Encl: (1) Department of the Army MWO 9-1430-450-50-005 of 1 Dec 1986

1. Purpose. Modification of the Bite Circuit Card A6 by replacing Transistor Q1 and Resistor R1. This modification will improve the power dissipation capabilities of both devices.

2. Information. This MI is for record purposes only. Application of this modification to the Guided Missile, Surface Attack will be accomplished by Depot-Level Personnel as directed by the Deputy Commanding General (CB), Marine Corps Research, Development and Acquisition Command, Quantico, Virginia 22134-5080, and controlled by the Marine Corps Missile Systems Modification Officer, AMSMI-SSS-MCL, U. S. Army Missile Command, Redstone Arsenal, Alabama.

3. Major Item Affected

Description	NSN	TAM No.	I.D. No.
MISSILE GUIDANCE SET	1430-01-143-9408	N/A	85578C

4. Instructions. Procedures and instructions contained in the enclosure are valid. Dispose of discarded materiel in accordance with current Marine Corps directives.

5. Recording and Reporting the Modification

a. Record the modification in accordance with the current edition of TM-4700-15/1. Marking of the modified equipment will be as directed by the enclosure.

FIGURE 7. Sample "Record Purpose Only" Publication

1

PCN 160 977042 00

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

b. Report the modification in accordance with the current edition of MCO P4400.84 or, for those units supported by the Automated Information System, UM 4790-5 (the Marine Corps Users Manual).

c. Completion of DA Form 2407 (Maintenance Request) is required. Distribution of copies will be in accordance with the enclosure, paragraph 14, except that the NMP copy (copy 2) should be forwarded to: Commander, U. S. Army Missile Command, ATTN: AMSMI-SSS/MCL, Redstone Arsenal, Alabama 35898-5238. Additional DD Form 2407's are available through that office.

BY DIRECTION OF THE COMMANDANT OF THE MARINE CORPS

OFFICIAL

T. B. CULLEN
Colonel, U.S. Marine Corps
Deputy Commander
Marine Corps Logistics Base
Albany, Georgia 31704-5000

DISTRIBUTION: BMS/L77/L82

Copy to: 7000161 (4)

FIGURE 7. Sample "Record Purpose Only" Publication

2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
HEADQUARTERS UNITED STATES MARINE CORPS
WASHINGTON, D.C. 20380-0001

NORMAL

MI-11240-25/27A
17 Apr 1989

U. S. MARINE CORPS MODIFICATION INSTRUCTION

INSTALL BRACKET, PIONEER TOOL ON COMMERCIAL UTILITY CARGO VEHICLE (CUCV)

1. Purpose. To provide instructions for installing a bracket, pioneer tool on Commercial Utility Cargo Vehicle (CUCV).

NOTE

This Modification Instruction (MI) supersedes MI-11240-25/27 of 3 Nov 1987. Procedures within shall be applied to all applications listed in paragraph 5.

2. Cancellation. MI-11240-25/27.

3. Information. The bracket will be identified as Using Unit Responsibility (UUR) item, (EA, 1) and incorporated into the appropriate SL-3 component list. Addition of this instruction for application on the Truck, Utility Carrier 4X4, 3/4 ton, M1009 will be at a later date.

4. Technical Manual Affected. SL-3-09067A and TM-2320-10/1.

5. Major Items Affected

Description	NSN	TAM No.	I.D. No.
TRUCK, Cargo Carrier 4X4, 1 1/4 Ton, M1008	2320-01-123-6827	D1016	08642A
TRUCK, Ambulance 4X4, 1 1/4 Ton, M1010	2310-01-123-2666	D0918	08803A
TRUCK, Shelter Carrier, 4X4, 1 1/2 Ton, M1028	2320-01-127-5077	D1105	08643A
TRUCK, Firefighting 4X4, 1 1/2 Ton, M1028FF	4210-01-259-4609	D1082	09067A

FIGURE 8. Sample of Special Tool/Supply Action paragraph

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.



DEPARTMENT OF THE NAVY
HEADQUARTERS UNITED STATES MARINE CORPS
WASHINGTON, D.C. 20380-0001

NORMAL

TI-08198A-25/4A
14 Mar 1989

U. S. MARINE CORPS TECHNICAL INSTRUCTION

NEW NARROW RADIAL TIRE FOR HOWITZER, MEDIUM, TOWED; 155MM, M198

1. Purpose. To provide instructions for utilization of the new Narrow Radial Tire for the M198 Howitzer.

2. Cancellation. TI-08198A-25/4.

3. Information. Reports on the existing narrow bias ply tire concerning side wall blowouts, thread chunking, and the concern about axle weight versus tire load rating indicate a new tire is required. The new radial ply tire will run cooler and be rated for a higher load which will eliminate the current problems. The new tire will mount on the current rim.

4. Technical Manuals Affected. TM 9-1025-211-10, TM 9-1025-211-20&P, and TM 9-1025-211-34P.

5. Major Item Affected

Description	NSN	TAM No.	I.D.No.
HOWITZER, Medium, Towed, 155mm, M198	1025-01-026-6648	E0665	08198A

6. Components Affected

Description	NSN	PN	Qty.
TIRE, Pneumatic	2610-00-204-4029	12009208	2
FLAP, Inner Tube	2640-00-158-5617	12009209	2
INNER TUBE, Pneumatic	2610-00-260-7345	12009210	2

FIGURE 9. Sample of Typical TI

Source: https://assist.dla.mil/ Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

7. Materiel Required

Description	NSN	PN	Qty.
TIRE, Pneumatic, Radial Ply w/Flap	2610-01-287-6409	12009347	2
FLAP, Inner Tube	2640-00-158-5617	20R	2
INNER TUBE, Pneumatic	2610-01-287-6410	12009348	2

8. Special Instructions

a. The radial ply tires and the bias ply tires should never be mismatched. The M198 will have two radial ply tires, or two bias ply tires. There should never be one radial ply and a bias ply tire mounted on a M198.

b. Insure that the radial ply tires remain constant where originally installed. If originally installed on the left side it must remain on the left side.

9. Towing Restriction. Towing restrictions are limited to 15 mph maximum over cross-country roads, 30 mph maximum over secondary roads, and 45 mph maximum over improved roads.

10. Skill and Time Required

a. Organization Automotive Mechanic (MOS 3521), .5 hour.

b. Field Artillery Cannoneer (MOS 0811), 1.5 hours.

11. Action. Assembly/disassembly of the narrow wheel and tire is performed in accordance with TM 9-2610-200-20. The following instructions will be used in conjunction with TM 9-2610-200-20.

a. During initial assembly, position the split ring approximately 180 degrees away from the valve stem, and be sure the ring is properly seated prior to and after inflation as evidenced by a 1/16 to 1/4-inch gap between the ends of the split ring.

CAUTION

Side and lock rings of different rim types are not interchangeable or authorized.

b. After assembly, tires shall be inflated only when contained by an approved restraining device such as a safety cage or safety straps. Inflate tires to cold inflation pressure of 110 pounds per square inch (psi) with rings and valve stem pointing away from all personnel. Visual check for proper seating of split ring.

FIGURE 9. Sample of Typical TI. - Continued

2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

c. Deflate tire completely, check for proper seating of split ring; if properly seated, reinflate tire to 110 psi.

d. Wheel must be mounted on hub with split ring and valve stem facing outward to prevent interference with the brake assembly.

e. Torque lug nuts 450 to 500 foot-pounds. Do not over torque.

f. The wheel and tire assemblies are most expeditiously, safely, and effectively mounted/dismounted with the Howitzer in the towing configuration; hand brakes applied, trails spread, firing base plate in place and wheels raised to full "up" position.

12. Recording the Instruction: Record the instruction in accordance with the current edition of TM-4700-15/1.

BY DIRECTION OF THE COMMANDANT OF THE MARINE CORPS

OFFICIAL

R. W. PRICE
Executive Director for
Logistics Operations
Marine Corps Logistics Base
Albany, Georgia 31704-5000

DISTRIBUTION: AZ

Copy to: 7000161 (2), 7000176 (1)

FIGURE 9. Sample of Typical TI. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
HEADQUARTERS UNITED STATES MARINE CORPS
WASHINGTON, D.C. 20380

NORMAL

TI-4700
10 Aug 1985

U. S. MARINE CORPS TECHNICAL INSTRUCTION

TEMPORARY TECHNICAL INFORMATION

MARINE CORPS EQUIPMENT

Encl: (1) Communications-Electronics Equipment
(2) Engineer Equipment
(3) Weapons and Ordnance Equipment
(4) Motor Transport Equipment
(5) Test and Calibration Equipment
(6) Maintenance Management Information

1. Purpose. To disseminate temporary information on Marine Corps equipment.

2. Instructions. Enclosures (1) through (6) provide temporary instructions for using unit action. These instructions shall be used until incorporated into the applicable technical publications.

FIGURE 10. Sample of temporary TI.

Source: https://assist.dla.mil Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

TI-4700

3. Self-Cancellation. 01 Sep 1985.

BY DIRECTION OF THE COMMANDANT OF THE MARINE CORPS

OFFICIAL

A. B. SEE
Colonel, U.S. Marine Corps
Deputy Commander
Marine Corps Logistics Base
Albany, Georgia 31704-5000

DISTRIBUTION: JA plus 7150008 (6)
7250035 (2)

Copy to: 7000161 (4)

FIGURE 10. Sample of temporary TI. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
HEADQUARTERS UNITED STATES MARINE CORPS
WASHINGTON D C 20380

NORMAL

MI-00616C-25/1 Ch 1
12 Aug 1984

U. S. MARINE CORPS MODIFICATION INSTRUCTION

CORROSION CONTROL

WATER TANK TRUCK, 1,000-GALLON, M50A2

1. Purpose. To direct pen changes to the basic MI.

2. Action

a. On page 1, paragragh 6, delete "COATING COMPOUND, NSN 8030-00-221-1834, PN TT-C-520, Qty. 1."

b. On page 2, paragraph 8c, delete the entire paragraph.

c. On page 3, paragraph 8d, change to read "8c".

BY DIRECTION OF THE COMMANDANT OF THE MARINE CORPS

OFFICIAL

A. B. SEE
Colonel, U.S. Marine Corps
Deputy Commander
Marine Corps Logistics Base
Albany, Georgia 31704-5000

DISTRIBUTION: AO plus 7734 (1)

Copy to: 7000161 (4)

FIGURE 11. Sample format for pen changes to MI.

PCN 160 000000 01

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.



DEPARTMENT OF THE NAVY
HEADQUARTERS UNITED STATES MARINE CORPS
WASHINGTON, D.C. 20380-0001

NORMAL

TI-4710-14/1D Ch 1
11 Oct 1988

U.S. MARINE CORPS TECHNICAL INSTRUCTION

REPLACEMENT AND EVACUATION CRITERIA

U.S. MARINE CORPS EQUIPMENT

Encl: (1) New page insert to TI-4710-14/1D.

1. Purpose. To transmit a new page insert to the basic Technical Instruction (TI).

2. Action. Remove and destroy the present page 3/(4 blank), ENCLOSURE (4) of the basic TI, and replace with the corresponding page contained in the enclosure.

3. Change Notations. Portions of the enclosure denoted by an asterisk (*) contain changes not previously published.

BY DIRECTION OF THE COMMANDANT OF THE MARINE CORPS

OFFICIAL

T. B. CULLEN
Colonel, U.S. Marine Corps
Deputy Commander
Marine Corps Logistics Base
Albany, Georgia 31704-5000

DISTRIBUTION: E

Copy to: 7000161 (2), 7000176 (1)

1/(2 blank)

FIGURE 12. Sample of transmittal of change pages

PCN 167 471000 01

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

ORDNANCE EQUIPMENT

CONDEMNATION CRITERIA FOR TUBES AND BREECH ASSEMBLIES

Item Name	Tube	EFC Life (Rounds)	EFC Factor Zone	EFC Factor Factor	Breech Life	Remarks
Howitzers, 105mm M101A1	M2A2	7,500	1 through 6 7	0.25 1.00	Original and two tubes	
Howitzer 8-In M110A2	M201 M201A1	10,000 or 0.135-Inch Wear	1 through 6 7 8 9	0.25 0.75 1.00	Original and four tubes	1/
Howitzer 155mm M114A2	M1A2	7,500	1 through 6 7	0.25 1.00	No retubing	
Howitzer 155mm M109A3	M185	6,375	1 through 6 7 8	0.25 0.75 1.00	Original and two tubes	2/
Howitzer M198 Towed	M199	1,750	3 through 6 7 8 8s	0.05 0.10 0.33 1.00	Original and five tubes	3/

1/ The tube life is 10,000 EFC rounds or a pullover gage measurement of 8.135 inches, whichever occurs first. Measurement is to be made 46.00 inches forward of the breech end of tube or a 10,000 EFC round count whichever occurs first.

*2/ The tube life is 6375 EFC rounds, or a pullover gage measurement of 6.250, whichever occurs first. Measurement is made 40.00 inches forward of breech face.

3/ Condemnation will be based on tube wear not rounds fired. Pullover gage measurements are made at 41.75 inches and 60 inches forward of rear face of tube.

FIGURE 12. Sample of transmittal of change pages

ENCLOSURE (4)

Source: https://assist.dla.mil -- Downloaded: 2026/10-20T21:18Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
HEADQUARTERS UNITED STATES MARINE CORPS
WASHINGTON D C 20380-0001

NORMAL

SI-08993A-15/1
26 Nov 1986

U.S. MARINE CORPS SUPPLY INSTRUCTION

WARRANTY PROCEDURES FOR

PISTOL, SEMIAUTOMATIC, 9MM, M9

Appendix: A. List of Technical Manuals
B. Inspection Tags
C. List of Government Forms

1. Purpose. To provide instructions detailing the securing of warranty services and/or repair parts on the 9mm pistol procured for the Marine Corps from Beretta, Italy, under the Department of the Army Contract Numbers DAAA09-85-C-0275.

2. Information. Certain procedures must be followed by the user to insure that the warranty claim system agreed upon between the Government and Beretta Corporation will function as intended. This Supply Instruction (SI) is intended to clarify the warranty procedures and method of processing warranty claims for services and/or repair parts.

3. Major Item Affected

Description	NSN	TAM No.	I.D. No.
PISTOL, Semiautomatic 9mm, M9	1005-01-118-2640	E1250	08993A

4. Action

a. Warranty Claims. All warranty claims will be processed through the Force Service Support Group (FSSG) maintenance channels. MCO 4400.32E applies.

b. Force/Brigade Service Support Group. To the maximum extent possible, a Warranty Coordinator (WC) should be established as a single point of contact for an installation or predetermined Command/geographical area. The number of personnel/units contacting the Warranty Administrator (WA), Commanding General (Code 833-2), Marine Corps Logistics Base (MCLB), Albany, GA, must be kept to a minimum to preclude

FIGURE 13. Sample format for appendix lines 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
HEADQUARTERS UNITED STATES MARINE CORPS
WASHINGTON, D C 20380 0001

NORMAL

SI-04707C-25/1
24 Mar 1988

U.S. MARINE CORPS SUPPLY INSTRUCTION

REPLACEMENT AND EVACUATION PROGRAM

FOR HOWITZER, HEAVY, SELF-PROPELLED, 8-INCH, M110A2

1. Purpose. To provide instructions for the Replacement and Evacuation (R&E) Program on the Howitzer, Heavy Self-Propelled, 8-Inch, M110A2.

2. Information. To enhance operational readiness and reduce rebuild cost of sighting and fire control equipment. Items listed in paragraph 4 a will not be returned with the M110A2 Self-Propelled Howitzer during the R&E Program.

3. Major Item Affected

Description	NSN	TAM No.	I.D. No.
HOWITZER, Heavy, Self-Propelled 8-Inch, M110A2	2350-01-041-4590	E0692	04707C

4. Action

a. Using Units. During R&E, in addition to collateral materiel listed in current SL-3, the following items will be retained for installation on replacement vehicles.

Description	NSN
*CANNON, M201E1 C/O	
FIRING MECHANISM ASSEMBLY	1025-00-895-9182
CANNON ASSEMBLY	1025-01-012-1062
SPACER, Ring	5365-01-050-7210
BRAKE, Muzzle	1025-01-227-5545

1

FIGURE 14. Sample of typical SI

PCN 163 625430 00

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.

Description	NSN
*PERISCOPE M17	6650-00-704-3549
TELESCOPE, Elbow M139	1240-00-328-5631
TELESCOPE, Panoramic M115	1240-00-895-9186
MOUNT, Telescope M137	1240-00-895-6492
MOUNT, Telescope M138	1240-00-896-2240
QUADRANT, Fire Control, M15	1290-00-896-2236

b. The above items with the exception of those annotated by an asterisk (*) are supported by the Maintenance Float and replaced by Force Service Support Groups submission of a Recoverable Item Report (WIR).

c. Depot Maintenance Activities (DMA's), Albany/Barstow. Vehicles received under the R&E Program for rebuild will not have the items listed in paragraph 4 a on them and will be returned to Materiel Division without the items.

d. Materiel Division's Albany/Barstow. End item will be issued without items listed in paragraph 4 a during the R&E Program.

5. Clarification/Inquiries on Procedures. Address inquiries regarding this Supply Instruction to the Commanding General (Code 833-1), Marine Corps Logistic Base, Albany, GA 31704-5000.

BY DIRECTION OF THE COMMANDANT OF THE MARINE CORPS

OFFICIAL

C. N. PASTINO
Colonel, U.S. Marine Corps
Deputy Commander
Marine Corps Logistics Base
Albany, Georgia 31704-5000

DISTRIBUTION: AW plus 5504/7000047 (2)

FIGURE 14. Sample of typical SI

*U.S. GOVERNMENT PRINTING OFFICE: 1990--704-034/30284

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:18Z
Check the source to verify that this is the current version before use.