MILITARY SPECIFICATION

JACKET, MEN'S: MESS, WHITE (STAFF, NONCOMMISSIONED OFFICERS)

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for gabardine, polyester and rayon white mess jackets.

1.2 Classification. The jackets shall be of one type in the following sizes, as specified (see 6.2):

Schedule of sizes

Short	Regular	Long	Extra Long
36	36	36	36
38	38	38	38
40	40	40	40
42	42	42	42
44	44	44	44
	46	46	

1.3 Individual orders. When jackets are custom tailored to an individual order, this specification shall govern, except that the detail requirements of Section 3, Table I, may be modified to the extent necessary for good custom tailoring practice.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps, Headquarters, U. S. Marine Corps (LMA-1), Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:11Z
Check the source to verify that this is the currenversion before use.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-280	-Thread, Cotton Gimp, Buttonhole.
V-T-285	-Thread, Polyester.
CCC-C-446	-Cloth, Muslin, Cotton.
DDD-L-20	-Label, For Clothing, Equipage, And Tentage (General Use).
DDD-T-86	-Tape, Textile; Cotton, General Purpose (Unbleached, Bleached or Dyed).

MILITARY

MIL-B-3461	-Buttons, Insignia, Metal, Uniform And Cap.
MIL-P-15064	-Pad, Shoulder and Sleeve-Head.
MIL-B-17757	-Box, Shipping, Fiberboard (Modular Sizes).
MIL-C-41820	-Cloth, Gabardine, Polyester And Rayon.

STANDARDS

FEDERAL

FED-STD-191	-Textile Test Methods.
FED-STD-751	-Stitches, Seams And Stitchings.

MILITARY

MIL-STD-105	-Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	-Marking For Shipment And Storage.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

U. S. Postal Service Manual

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DOD adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, ATTN: Order Section, 1616 P Street, N. W., Washington, D. C. 20026.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Guide sample. A guide sample is furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, a first article consisting of the number of finished jackets specified by the procuring activity (see 6.2), shall be submitted or made available to the contracting officer or his authorized representative for inspection. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier at the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Basic material. The basic material for the jacket shall be cloth, gabardine, polyester and rayon, conforming to MIL-C-41820, type III, class 1, 8.0 ounce, white shade 2400 (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.

3.3.2 Tape. The tape for the breakline of the lapels shall be cotton, preshrunk, unbleached, 1/4 inch wide, conforming to type III, class 2 of DDD-T- 86, except the requirements for nonfibrous material shall not apply.

3.3.3 Bias binding. Binding for the raw edges of seams, yoke, armholes, facing, bottom turnup and for making the jacket hanger shall conform to class 3, type III of CCC-C-446, except the total nonfibrous material shall be between 5 and 10 percent. The bias binding shall have sized edges to prevent raveling.

3.3.4 Polyester thread. The thread for seaming, stitching, buttonholes and bartacks shall be polyester, white shade AG, cable No. 66049 conforming to type I, class 1, size A, 3-ply of V-T-285.

3.3.5 Gimp. The buttonhole gimp shall be cotton, No. 8, soft or glazed finish, white shade AG, cable No. 66049 conforming to type I or II of V-T-280.

3.3.6 Buttons. When specified (see 6.2), buttons shall be furnished with jacket. The insignia buttons shall be metal, gold plated, enlisted design, 27-line, conforming to type I, style 3, class A, subclass 2 of MIL-B-3461.

3.3.6.1 Ring toggles. When buttons are furnished, ring toggles for securing buttons to jacket shall conform to MIL-B-3461.

3.3.6.2 Linked buttons. When buttons are furnished, a pair of insignia buttons for the front closure shall be linked together with a multiple link chain conforming to MIL-B-3461.

3.3.7 Labels. Each jacket shall have a combined identification-instruction label and a size label. The labels shall show fastness to laundering.

3.3.7.1 Identification-instruction label (combined). The identification-instruction label shall conform to type VI, classes 1 and 3 (combined) of DDD-L-20 and shall measure not less than 5-1/2 by 2-1/2 inches. The content and format shall be as follows:

Nomenclature (item description)
Contract number
Name of contractor
Fiber Contents Act information

LAUNDERING AND PRESSING INSTRUCTIONS

Remove buttons

1. Hand laundering

   a. Launder in warm water using mild soap.
   b. Scrub soiled areas.
   c. Rinse thoroughly in clear warm water.
   d. Dry without wringing.

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:11Z
Check the source to verify that this is the currenversion before use.

2. Machine laundering

   a. Use a mild detergent.
   b. Complete washing cycle for 30 minutes in 120° to 140° F water.
   c. Rinse thoroughly in clear warm water.
   d. Set automatic dryer for regular fabrics and dry for 15 minutes.

3. Pressing

   a. If pressing is required, use a cool iron.

DO NOT USE AUTOMATIC IRON ABOVE RAYON SETTING

DO NOT USE HOT IRON

3.3.7.2 Size label. The size label shall conform to type VI, class 2 of DDD-L-20. The numerical designation for size shall be followed by S for Short, R for Regular, L for Long, or XL for Extra Long, as applicable. The stock number may be incorporated in the identification-instruction label, below the name of the contractor.

3.3.8 Shoulder pads. The color of the shoulder pads shall be white and shall conform to type I, class 2 of MIL-P-15064.

3.4 Design. The jacket shall be semiformfitting U. S. Marine Corps design as shown in Figures 1 through 3; the unlined jacket shall have a four-piece plain back with inside back yoke, waist darts, ornamental sleeve cuffs, collar with worked eyelets, peaked lapels and shoulder straps to button. Jacket shall have three worked eyelets on each front and one worked eyelet on each shoulder for detachable buttons and one buttonhole on each front for linked buttons and one buttonhole on each shoulder strap. The jacket is designed to be held together at the front by the linked buttons.

3.5 Patterns. Standard patterns will be furnished by the Government. The standard patterns shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The standard patterns provide 1/4-inch seam allowance for shoulder strap seam and for seams at the edges of the lapels and front edges of jacket; 5/8-inch seam allowance for center back seam; 1-inch seam allowance for under arm seam (French seam); 3/8-inch seam allowance as indicated in operation or on patterns for all other seams, except as otherwise specified in Table I. These patterns show size, are marked for placement and cutting and are notched or marked for proper assembly of component parts.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the currentversion before use.

3.5.1 List of pattern parts. Jackets shall be cut from the materials specified herein in accordance with the number of pattern parts indicated below:

PATTERN NOMENCLATURE:

Item	Material: Basic Material	No. of cut parts
1.	Front	2
2.	Side front	2
3.	Center back	2
4.	Side back	2
5.	Yoke	2
6.	Top sleeve	2
7.	Under sleeve	2
8.	Topcollar	1
9.	Undercollar	1
10.	Collar interlining	1
11.	Front interlining	2
12.	Front facing	2
13.	Shoulder straps	4
14.	Cuffs	2
	Markers	
15.	Sleeve cuff marker	
16.	Collarstand marker	
17.	Front eyelet marker	
18.	Bottom turnup marker	
	Shaper	
19.	Working lapel shaper (with eyelet marker)	
	Marker	
20.	Finished collar and lapel shaper	

3.6 Construction. Jackets shall be manufactured in accordance with the operations and stitch, seam and stitching types specified in Table I. The supplier is not required to follow the exact sequence of operations as listed in Table I but all operations specified shall be used to manufacture the jackets.

3.6.1 Stitches, seams, and stitchings. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. All overedge stitching shall be done on serging machines with a knife attachment properly set to trim the raveled edge without cutting the material.

3.6.1.1 Ends of seams and stitching. Ends of seams and stitching (stitch type 301), except the ends of a continuous line of stitching, when not caught in another seam or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the breaks not less than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.

3.6.2 Shade marking. The component parts of the jacket, except parts cut from ends, shall be marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.

(b) Sew-on shade tickets.

(c) Adhesive-type tickets whose adhesive causes discoloration and whose adhesive mass adheres to the material upon removal of the tickets.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut the jackets in strict accordance with patterns furnished by the Government. b. Cut material in the direction indicated by the directional lines on the patterns. The straight of the material shall indicate the warp direction. c. Cut all parts from one piece of basic material, except the interlining for collar and facing, undercollar and underply of shoulder straps may be cut from ends. All parts cut from ends shall harmonize with the shade of the jacket, except the interlining for collar and facings. d. Cut the cloth, muslin (for binding the raw edges of seams, armholes, bottom turnup, and for making the jacket hanger) on the bias, 1-1/8 inches wide from the material specified in 3.3.3.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2.	Replacement of damaged parts.					
	a. Replace at time of cutting any parts of the jacket containing holes or seriously weakening defects such as smashes, multiple floats and slubs likely to develop into holes.					
	b. Replace any part damaged during manufacturing process by needle chews which may develop into a hole, scissor or knife cuts, tears, holes, mends, burns and large exposed drill holes.					
3.	Shade marking.					
	a. Mark or ticket (see 3.6.2) all component parts cut from basic material, except those parts cut from ends (see 1.c), in order to insure proper assembly and a uniform shade and size throughout the jacket.					
	b. Adhesive tickets when used shall be adhered to the inside of the jacket.					
4.	Make hanger.					
	a. Fold the bias binding for the jacket hanger in half lengthwise, turning the edges to the inside to finish 1/4 inch wide, and seam 1/16 inch from the turned edge.	301	EFp-1	10-14	A	A
	b. Cut the hanger 3-1/4 ±1/4 inches long.					
5.	Make shoulder straps.					
	Finished appearance. The shoulder straps shall finish smooth and flat without twists, puckers, pleats or other distortion. The edges shall be neatly and completely worked out. The buttonholes shall be clean cut,					

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5.	Make shoulder straps. (con't) well made and correctly positioned. The buttonholes shall be well worked over gimp to fit a 27-line insignia button. The ends of the gimp shall be pulled through to the underside of the straps and the end of the buttonholes securely bartacked. The purling of the buttonhole shall be on the outside of the strap. a. The shoulder straps shall be made of two plies of basic material.					
	b. Position the two plies with edges even and uniformly seam together 1/4 inch from the front and back edges and around the collar end, evenly trimming the excess material around the collar end for proper turning.	301	SSe-2 (a)	12-16	A	A
	c. Turn the straps completely, working the seam to the edges of the straps. Edgestitch the straps uniformly 1/8 inch from the seamed edges.	301	SSe-2 (b)	12-16	A	A
	d. Make a horizontal eyelet-end, square-bar type buttonhole, cut 3/4 inch long, in each strap, midway between the back and front edges, and with the inside edge of the buttonhole eyelet placed so that in the finished jacket, the edge of the shoulder button shall be 1/4 to 1/2 inch from edge of collar and with the purling to finish on the outside of the strap.	Button-hole		60 per button-hole (minimum) (not including bartack)	A	A
	e. The buttonhole shall be well worked over gimp and the ends of the gimp shall be pulled through to the underside of the buttonhole.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5.	Make shoulder straps. (con't)					
	f. Securely bartack the ends of the buttonholes and trim the ends of the thread and gimp.	Bartack		21 per bartack (minimum)	A	A
	g. Press the straps smooth and flat with a heated pressing iron or pressing machine. The straps shall be uniform in shape and size in accordance with the pattern.					
6.	Make undercollar.					
	Finished appearance. The collar interlining and undercollar shall be uniformly seamed together and shall finish smooth and flat without twists, gathers, pleats, puckers or other distortions.					
	a. The undercollar assembly shall consist of two plies of basic material.					
	b. Mark the breakline of the undercollar on the interlining side with collarstand marker.					
	c. Position the interlining on the undercollar with edges even and notches matching and join together at the mark for the breakline. Continue to stitch along the sides and upper edge 1/8 to 3/16 inch from raw edges.	301	SSv-1 SSa-1 (sides and upper raw edges)	10-14 10-14	A A	A A
	d. The breakline stitching shall measure 1-1/4 $\pm$1/8 inches at the vertical center of undercollar.					
7.	Assemble topcollar and undercollar.					
	Finished appearance. The collar shall be uniformly edgestitched and shall finish smooth and flat					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7.	Assemble topcollar and undercollar. (con't)					
	without twists, puckers, pleats, or other distortions. The corners and seamed edges shall be well worked out. The seams shall finish at the edge of the collar.					
	a. Position undercollar assembly on the topcollar with side and upper edges even and notches matching, and join sides and upper edges together with 1/4-inch seam.	301	SSe-2 (a)	12-16	A	A
	b. Trim corners for proper turning. Turn collar, completely working out the corners and seamed edges.					
	c. Edgestitch the collar uniformly 1/8 inch from seamed edges.	301	SSe-2 (b)	12-16	A	A
	d. Trim the lower edge of topcollar even with the undercollar.					
	e. Press the entire collar smooth and flat with a heated pressing iron or pressing machine.					
8.	Seam sleeves at forearm.					
	Finished appearance. The forearm seam shall finish smooth and flat without twists, gathers, pleats, puckers or raw edges. The seam shall start and finish evenly. Finished edge of seam on outside of sleeve shall be towards the back.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
8.	Seam sleeves at forearm. (con't)					
	a. Position the top and under-sleeves with notches matching and seam together at the forearm 3/8 inch from raw edge.	301	LSq-2 (a)	12-16	A	A
	b. Bind together the raw forearm edges of top and undersleeve with bias binding. Both edges of the binding shall be turned under and caught in the stitching 1/16 inch from the inner folded edges.	301	BSc-1	12-16	A	A
	c. Turn back and topstitch the topsleeve uniformly 1/8 inch from raised edge.	301	LSq-2 (b)	12-16	A	A
9.	Join cuffs to sleeves.					
	Finished appearance. The upper curved edge of cuffs shall be properly formed and creased, and the cuffs shall be uniformly stitched to sleeves. The point of the cuff shall be centered between the lower front creased edge and the creased backarm seam of sleeve.					
	a. Fold the cuff lengthwise at the point with wrong side out. Seam the point 1/8 inch from the raw edges. Turn cuff completely, working out the point.	301	SSa-1	12-16	A	A
	b. Turn under the upper edge of the cuff, forming the finished curved edge in accordance with the shape of the pattern, and press smooth and flat with a heated pressing iron or pressing machine, creasing the edge.					
	c. In lieu of pressing, the turnunder at upper edge of cuffs may be basted.	101 or Hand				

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9.	Join cuffs to sleeves. (con't)					
	d. Mark the sleeve in accordance with the sleeve cuff marker for positioning the cuffs with notch matching the forearm seam line and with the lower raw edge of the sleeve and marker even.					
	e. Position the cuffs at the mark on the sleeve and seam uniformly 1/8 inch from the upper folded edge of cuff.	301	LSd-1	12-16	A	A
10.	Seam sleeves at backarm; hem cuff.					
	Finished appearance. The backarm seam shall finish smooth and flat without twists, gathers, pleats, puckers, or raw edges. The binding shall be uniformly stitched and the basic material shall be securely caught in the stitching. Finished edge of seam on outside of sleeve shall be towards the back. The hem shall be of uniform width. The seam shall start and finish evenly.					
	a. Seam top and undersleeve together at the backarm with a 3/8-inch seam, catching the ends of the cuff in the seam. Top edge of cuffs shall be even.	301	LSq-2 (a)	12-16	A	A
	b. Bind together the raw backarm edge of top and undersleeve with bias binding, with both edges of the binding turned under and caught in the stitching 1/16 inch from the inner folded edges. The binding shall extend to the bottom end of sleeve only.	301	BSc-1	12-16	A	A
	c. Turn back and topstitch the topsleeve uniformly 1/8 inch from the raised edge.	301	LSq-2 (b)	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10	Seam sleeves at backarm; hem cuff. (con't)					
	d. Hem the lower edge of cuff 1/4 inch, with the stitching 1/8 inch from folded edge.	301	EFa-1	12-16	A	A
11	Fell cuff to sleeve.					
	Finished appearance. The bottom edge of the cuff shall finish smooth and flat without twists, puckers, pleats or other distortions.					
	a. Turn cuff outlet to the inside, in accordance with notches, against the bottom end of sleeves. Fell the upper folded edge of turnup to body of sleeve with blindstitching.	103 or Hand	EF-1 (finished seam)	6-8 8-10	A A	
	b. Turn sleeves right side out and press the lower half of sleeve smooth and flat. The backarm crease shall be on the backarm seam.					
	c. On the finished jacket, the length of the cuff shall be 3-1/4 ±1/4 inches at the front and back creased edges, and 6 ±1/4 inches at the point.					
12	Bind left and right yoke.					
	Finished appearance. The binding shall be evenly stitched and the basic material shall be securely caught in the stitching. The binding shall not be tight or full, causing puckers, gathers, pleats or other distortions.					
	a. Bind the lower raw curved edge of left and right yokes with bias binding, with both edges of the binding turned under and caught in the stitching 1/16 inch from the inner folded edges.	301	BSc-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
13.	Fold, stitch and press darts in facings.					
	Finished appearance. The folded edge of the facing darts shall be towards the front. The darts shall be tapered to a point at the upper end.					
	a. Fold the facing, matching the notches of dart, and stitch the entire length of darts 1/8 inch back from the notch at the lower end and tapering to a point at the upper end, securely backtacking the pointed end.	301	OSf-1	12-16	A	A
	b. Press the darts smooth and flat with a heated pressing iron.					
14.	Bind facings; sew on identification-instruction label.					
	Finished appearance. The binding shall be evenly stitched and the basic material shall be securely caught in the stitching. The binding shall not be tight or full, causing puckers, gathers, pleats or other distortions. The identification-instruction label shall be properly positioned and securely sewn to the right facing.					
	a. Bind the raw back edge of the facings with bias binding, with both edges of the binding turned under and caught in the stitching 1/16 inch from the inner folded edges.	301	BSc-1	12-16	A	A
	b. Sew the identification-instruction label to the outside of the right facing in a vertical position with single row of stitching 1/8 inch from each edge of the label.	301	SSa-1 (each edge)	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
14.	Bind facings; sew on identification-instruction label. (con't)					
	c. The label shall be positioned at the center of the facing with the lower edge approximately 2 inches above the finished bottom edge of jacket.					
15.	Assemble fronts.					
	Finished appearance. Front and side front panel shall be carefully joined, uniformly stitched and shall finish smooth and flat without twists, gathers, puckers, pleats, or raw edges. The seams shall start and finish evenly. The darts shall be tapered to a point at the upper end. The folded edge of the front darts shall be towards the back.					
	a. Fold the front, matching notches at the waist and stitch the entire length of the dart 1/8 inch back from the notches at lower end, tapering to a point at the upper end and securely backtacking the pointed end.	301	OSf-1	12-16	A	A
	b. Position front and side front panel right side out and join with a 1/4-inch seam.	301	SSa-1	12-16	A	A
	c. Turn the front and side front panel to the inside, matching the notches at the lower edge of armhole, and stitch together 3/4 inch from the seamed edge (forming a French seam).	301	SSe-2 (b) (French) seam)	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
16.	Assemble back.					
	Finished appearance. The back and side backs shall be carefully joined, uniformly topstitched and shall finish smooth and flat without twists, gathers, puckers, pleats or raw edges. The seams shall start and finish evenly. The binding shall be uniformly stitched and the basic material shall be securely caught in the stitching. The center back seam outlet shall be turned towards the left side, and the side back seams shall be turned toward the center back.					
	a. Position the center back with edges even and notches matching, and join at the center with a 5/8-seam.	301	LSq-2 (a)	12-16	A	A
	b. Position the left and right side backs to the respective back with notches matching and join with a 3/8-inch seam.	301	LSq-2 (a)	12-16	A	A
	c. Bind together the raw edges of center back and side back seams, respectively, with bias binding. Both edges of the binding shall be turned under and caught in the stitching 1/16 inch from inner folded edges.	301	BSc-1	12-16	A	A
	d. Turn back and topstitch the left and right side backs, respectively, uniformly 1/8 inch from the raised edges.	301	LSq-2 (b)	12-16	A	A
	e. Turn back and topstitch the left back at the center seam 1/8 inch from the raised edge.	301	LSq-2 (b)	12-16	A	A
17.	Join fronts and back.					
	Finished appearance. The fronts and back shall be carefully joined at the sides with the back					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
17.	Join fronts and back. (con't)					
	uniformly topstitched. The seam shall finish smooth and flat without twists, gathers, pleats, puckers, or raw edges, and shall start and finish evenly. The binding shall be uniformly stitched and the basic material shall be securely caught in the stitching. The finished edge of the seam, on the outside of the jacket, shall be towards the front.					
	a. Position the back and fronts with edges even and join at the sides with a 3/8-inch seam.	301	LSq-2 (a)	12-16	A	A
	b. Bind together the raw edges of the left and right side seam allowance, respectively, with bias binding. Both edges of binding shall be turned under and caught in the stitching 1/16 inch from the inner folded edges.	301	BSc-1	12-16	A	A
	c. Turn and topstitch the back at the sides uniformly 1/8 inch from the raised edge.	301	LSq-2 (a)	12-16	A	A
18.	Press darts and seams.					
	a. The front darts, French seam, side seams and back seam shall be pressed smooth and flat with a heated pressing iron or pressing machine. The front darts, French and side seams shall be pressed toward the back.					
19.	Seam interlining to fronts.					
	a. The front interlining shall be made of a single ply of basic material.					
	b. Overedge stitch the back raw edge of interlining.	502 or 503	EFd-1	8-10	A	A

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
19	Seam interlining to fronts. (con't)					
	c. Position the left and right interlinings on the inside of the respective fronts, with front, top and armhole edges even. Seam interlining to fronts 1/8 inch from shoulder and front edge of jacket.	301	SSa-1	12-16	A	A
20	Mark lapels and bottom edges.					
	a. Mark the lapels in accordance with the shaper furnished for proper location of notch, and for positioning of the bridle tape.					
	b. Mark the lower edge of jacket for bottom turnup in accordance with the pattern furnished.					
	c. Trim the bottom edge of the interlining even with the mark for bottom turnup. Trim the bottom ends of the side and back seam, if necessary.					
21	Bind bottom turnup.					
	Finished appearance. The binding shall be uniformly stitched and the basic material shall be securely caught in the stitching. The binding shall not be tight or full, causing puckers, gathers, or other distortion.					
	a. Bind the raw edge of the bottom turnup with the bias binding. Both edges of the binding shall be turned under and caught in the stitching 1/16 inch from the inner folded edges.	301	BSc-1	12-16	A	A
	b. The binding shall extend along the entire bottom edge, from the back edge of the front cutout.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
22.	Stitch center back point. Finished appearance. Center back point shall be stitched to allow a uniform point to be located at the end of the center back.					
	a. Fold the jacket to the outside along the center seam and diagonally stitch the center backs together at the lower edge. The stitching shall extend from 1-1/4 inches above the lower end of the center seam to the bottom bound edge of the back parts.	301	SSa-1	12-16	A	A
23.	Stitch bridle tape to lapel.					
	a. Position the 1/4-inch-wide bridle tape on the interlining side of the fronts along the mark for the breakline of the lapel with the front edge of the tape in line with the notch at the gorge.					
	b. Stitch the tape to the breakline of the lapel, through all plies, 1/16 inch from each finished edge of the tape, holding the tape tautly, and properly distributing the fullness.	301	SSa-1 (each edge)	10-14	A	A
	c. The tape shall extend from the gorge notch to approximately 4 to 5 inches above the base of lapel.					
	d. Press the lapels smooth and flat with a heated pressing iron or pressing machine, to remove the fullness.					
24.	Make eyelets in fronts. Finished appearance. The eyelets shall be worked with the purling on the outside of the fronts, and shall finish with a 1/8-inch diameter opening.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
24	Make eyelets in fronts. (con't)					
	a. Mark location of eyelets on right and left fronts, in accordance with the eyelet marker, for removable insignia buttons.					
	b. Make one eyelet at each mark through fronts and interlining.	Eye-let		22 per eyelet (minimum)	A	A
25	Seam shoulders.					
	Finished appearance. The shoulder seams shall be carefully joined, uniformly stitched, and shall finish smooth and flat without twists, gathers, puckers, pleats, or raw edges. On the outside of the jacket, the finished edge of seam shall be toward the front.					
	a. Join fronts and back at shoulder with a 3/8-inch seam, working in the fullness on the backs so that the shoulders may be properly shaped.	301	LSq-2 (a)	12-16	A	A
	b. Turn the back at the seam and topstitch 1/8 inch from the raised edge.	301	LSq-2 (b)	12-16	A	A
26	Join yoke and facing at shoulders.					
	Finished appearance. The seam joining yoke and facing at the shoulders shall finish smooth and flat with proper fullness on the back. In the finished jacket, the yoke shall be lapped on the facing.					
	a. Join the yoke and the facing at the shoulder with a 3/8-inch seam, working in the proper fullness on the back.	301	SSa-1	12-16	A	A
	b. Spread open the seam and press flat with a heated pressing iron or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
26.	Join yoke and facing at shoulders. (con't)					
	c. Overlap the right and left yoke at the upper edge with notches matching. The right yoke shall overlap the left yoke. Seam the overlapping plies together 1/8 to 3/16 inch from the raw edges.	301	SSa-1	12-16	A	A
27.	Join collar to jacket.					
	Finished appearance. The collar shall be carefully joined to the jacket without puckers, pleats or distortion.					
	a. Position collar on outside of jacket with lower (neck) edge of collar even with top (neck) edge fronts and back part, and with the ends of the collar in line with the lapel notch.					
	b. Join collar to neck edge of fronts (gorge) and back with a 1/8-to 3/16-inch seam from end to end.	301	SSa-1	12-16	A	A
28.	Stitch hanger and label to jacket.					
	Finished appearance. The size label and jacket hanger shall be properly positioned and securely stitched to the jacket.					
	a. Stitch upper edge of size label and the ends of the hanger to the inside center back of jacket at the neck.	301	SSa-1	12-16	A	A
	b. In the finished jacket, the hanger opening shall be 1-1/2 to 2 inches long when measured along the lower edge of the top collar.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
29.	Join facing-yoke assembly to jacket. Finished appearance. The facing-yoke assembly shall be uniformly stitched to the jacket and shall finish smooth and flat without gathers, pleats or puckers. a. Position the facing-yoke assembly on the outside of the respective fronts and backs with collar inserted between, with edges even, and the notch at the upper edge of yoke in line with the center back seam line. b. Join the facing-yoke assembly to fronts with 1/4-inch seam. The stitching shall extend from the back bottom edge of facing, front, top and front edges of the lapel, gorge and neck, catching the yoke, size label and hanger in the stitching. c. Trim points of lapels and bottom corners of jacket for proper turning. Notch seam allowance along the gorge and neck to allow for proper turning. d. Turn facing-yoke assembly to inside, working out completely the corners and seamed edges.	301	SSae-2 (a)	12-16	A	A
30.	Edgestitch jacket. Finished appearance. The edgestitching shall be of uniform width without twists, puckers, pleats or other distortions. a. Baste the bottom turnup, forming the curve and a point at the center back in accordance with the mark. In the finished jacket, the bottom turnup shall be uniformly 1 ±1/8 inches wide, including the binding.	101				

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
30.	Edgestitch jacket. (con't)					
	b. The bottom turnup may be pressed and creased at the mark in lieu of basting.					
	c. Edgestitch the jacket 1/8 inch along the top and front edges of the lapels and the front and bottom edge of jacket, with the stitching along the bottom edge extending the width of the facing, and with the facing overlapping the bottom turnup. Continue to stitch 1/16 inch along the upper bound back edge of facing up to the end of turnup, and from this point continue to stitch the entire turnup along the upper bound edge.	301	SSe-2 (top and front edges shows finished seam) SSc-1 (bottom edge of facing) LSa-1 (back edge of facing) EFb-1 (upper bound edge of turnup)	12-16	A	A
	d. Topstitch facing-yoke assembly to collar 1/16 inch from the raised edge. The line of stitching shall begin and end not less than 1 inch in back of lapel breakline.	301	LSq-2 (b)	12-16	A	A
31.	Set shoulder pads.					
	a. Insert shoulder pad between the facing-yoke assembly and interlining in line with the armhole edge.					
	b. Stitch the facing-yoke assembly at the armhole 3/16 to 1/4 inch from edge, catching the shoulder pad and interlining in the stitching. The stitching shall extend from end of the yoke to the bound edge of facing at the lower end of armhole.	301	SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
32	Set shoulder straps. Finished appearance. The shoulder straps shall be properly positioned and uniformly stitched to the jacket without twist, puckers, pleats or other distortion. On the finished jacket, the straps shall be 2-3/8 ±1/8 inches wide at the armhole seam and shall taper to 1-3/4 ±1/8 inches at buttonhole eyelet end. a. Properly position the shoulder straps with the rounded end 1/4 to 3/8 inch above the lower edge of undercollar and with the back edge of the strap 1/4 to 3/8 inch to the back of the shoulder seam at the armhole edge. b. Seam the shoulder straps to the jacket 1/4 inch from the armhole edge, trimming the straps even with the armhole when necessary.	301	SSa-1	12-16	A	A
33	Make eyelet in shoulders and collar. Finished appearance. The eyelets shall be worked with the purling on the outside of the shoulder and collar, and shall finish with a 1/8-inch diameter opening. All stitches shall be securely caught in the fabric. a. Mark location of eyelet in shoulders for removable button to correspond with eyelet of buttonhole in shoulder straps, so that on the finished jacket, the straps shall lie smooth and flat without twisting and bulging. b. Mark each end of collar for location of one eyelet, 1 inch from end and outer edges, respectively, of collar.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
33.	Make eyelet in shoulders and collar. (con't)					
	c. Make one eyelet at the mark on each shoulder. The eyelet shall be through front and front interlining only.	Eye-let		22 per eyelet minimum	A	A
	d. Make one eyelet at the mark on each end on the collar.	Eye-let		22 per eyelet minimum	A	A
34.	Set sleeves.					
	Finished appearance. The sleeves shall be carefully set without twists, puckers, pleats or gathers and with the fullness properly distributed.					
	a. Position sleeves on outside of jacket at the armhole, with backarm seam of sleeve matching the side back seams and with notch in top sleeve and front matching.					
	b. Join sleeves to the jacket with a 3/8-inch seam, forming a pleat at the base of the armhole with the excess fullness and catching the armhole end of shoulder strap, shoulder pads, facing yoke assembly and front interlining in the stitching.	301	SSa-1	10-14	A	A
	c. Join sleeves to jacket with a second row of stitches 3/16 inch from armhole edge in order that the armhole may be bound with less difficulty.	301	SSa-1	10-14	A	A
	d. Press the entire armhole smooth and flat with a heated pressing iron, removing the fullness.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
35	Bind armhole. Finished appearance. The binding shall be uniformly stitched and the basic material shall be securely caught in the stitching. The binding shall not be tight or full, causing puckers, gathers or pleats. a. Bind the raw edges of the armhole seam together with 1-1/8-inch-wide bias binding, with the edges of the binding turned under and leaving approximately 1/2 inch extension on the top end at the base of the armhole, and catching all plies in the stitching. The stitching shall be 1/16 inch from the inner folded edges of the binding.	301	BSc-1	12-16	A	A
	b. Turn the top end of the binding to the inside of armhole, lapping the top end on the opposite end and secure to armhole with a 3/8-to 1/2-inch-long bartack. The bartack shall be made on a line with the row of stitches for the binding and shall be stitched through all plies of material at the point of bartacking.	Bar-tack		28 minimum per bartack	A	A
36	Make buttonholes. Finished appearance. The buttonholes shall be clean cut, well made, and correctly positioned. The stitching shall be securely caught in the basic material. The buttonholes shall be well worked over gimp to fit a 27-line insignia button. The ends of the gimp shall be pulled through to the underside of buttonholes and the ends of					

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
36.	Make buttonholes. (con't)					
	buttonholes securely bartacked. The purling of the buttonhole shall be on the outside of fronts.					
	a. Mark the left and right fronts for the location of one buttonhole on each front.					
	b. Make a horizontal, eyelet-end square-bar type buttonhole, cut 3/4 inch long, at each of the marks, with the inside edge of the eyelet 5/8 inch from the front edge of the jacket.	Button-hole		65 per A buttonhole (minimum not including bartack)		A
	c. Securely bartack the end of each buttonhole, and trim the ends of the gimp.	Bar-tack		21 per A bartack (minimum)		A
37.	Clean jacket.					
	a. Pull and remove all basting thread. Trim all ends of stitchings and remove all loose thread from the jacket. Remove all spots, stains and shade tickets and markings without injury to the material.					
38.	Press jacket.					
	Finished appearance. The jacket shall be well pressed throughout with heated pressing irons or pressing machines of a type suitable to obtain the desired shape and appearance in accordance with good manufacturing procedures.					
	a. Block the shoulders on a shoulder shaping machine with shoulder straps properly positioned over shoulder seam and pressed flat. Remove any impressions under the shoulder strap, if any.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
38.	Press jacket. (con't) b. Press armholes solid from the inside, creasing the armholes at the front, back and armpit. The armpit and the back of armhole shall be held short while pressing. c. Block armholes on pressing buck, shrinking in the top sleeves. d. Press the sleeve smooth and flat, creasing at backarm and forearm. The backarm crease shall be on the backarm seam. The forearm crease shall extend uniformly to a point 3 to 3-1/2 inches below the armhole. The backarm crease shall be in line with forearm crease. e. Press the lapels smooth and flat from the breakline to the front edge, straightening the edges and working the fullness towards the center of the lapel and removing the fullness by shrinking. Lapels shall not be creased. f. Press the collar at the center back, creasing on the breakline the length of the collar and continuing to approximately 2 inches below the top edge of lapels. g. Press the fronts smooth and flat on a body machine, straightening the front edges of the jacket. Care shall be exercised in pressing the fronts so that the bottom edges are even. h. Press bottom edge of jacket smooth and flat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
38.	Press jacket. (con't) i. Press the sides, working the fullness towards the back. j. Press the back smooth and flat, removing all fullness.					
39.	Attach buttons (when required). a. When insignia buttons are required for the shoulders and fronts of the jacket, they shall be attached by inserting the shank of the button through the eyelets on the shoulders and fronts and securing on the inside with metal ring toggles. b. When insignia buttons are required for front closure, they shall be attached to the jacket with the multiple link chain on the inside of jacket and one button through each buttonhole to the outside.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:11Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished jacket shall conform to measurements shown in Table II.

Table II - Jacket measurements 1/

Size	Breast 2/	Back length 3/	Sleeve length 4/
	Short		
36	20-1/2	20	17
38	21-1/2	20-1/4	17
40	22-1/2	20-1/2	17
42	23-1/2	20-3/4	17
44	24-1/2	21	17
	Regular		
36	20-1/2	21	18
38	21-1/2	21-1/4	18
40	22-1/2	21-1/2	18
42	23-1/2	21-3/4	18
44	24-1/2	22	18
46	25-1/2	22-1/4	18
	Long		
36	20-1/2	22	19
38	21-1/2	22-1/4	19
40	22-1/2	22-1/2	19
42	23-1/2	22-3/4	19
44	24-1/2	23	19
46	25-1/2	23-1/4	19
	Extra Long		
36	20-1/2	23-1/2	20
38	21-1/2	23-3/4	20
40	22-1/2	24	20
42	23-1/2	24-1/4	20
44	24-1/2	24-1/2	20

1/ Tolerance on all measurements: ±1/2 inch.

2/ Breast measurement taken from the front edge to the center back seam in line with armpit and with the jacket lying open and flat.

3/ Back length measurement taken along center back seam from lower edge of undercollar to bottom edge of jacket.

4/ Sleeve length measurement taken along underarm seam from pit of armhole to bottom edge of cuff.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. The finished jacket shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of this certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5)

4.3 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.4 First article inspection. When first article is required, inspection shall be performed on a completely fabricated jacket for conformance to all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. Wherever applicable, tests shall be conducted in accordance with FED-STD-191. All test reports shall contain individual values utilized in expressing the final results.

4.5.2 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified herein.

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.

4.5.3 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.5.4 Examination of end item. The defects found during examination of the end item shall be classified in accordance with 4.5.4.1, 4.5.4.2, 4.5.4.3, and 4.5.4.4. The sample unit shall be one jacket. All defects shall be as indicated below, except those with an asterisk (*) in classification column which shall be classified as follows:

Major defect - When seriously affecting appearance or serviceability.
Minor A defect - When affecting appearance or serviceability, but not seriously.

4.5.4.1 General defects. General defects shall be classified as follows:

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Buttonholes and eyelets (construction)	a. One or more omitted or added.	X		
	b. Wrong type buttonhole or eyelet.		X	
	c. Buttonhole or eyelet not securely caught on fabric, causing stitching to pull away from fabric.	X		
	d. Not corresponding to size of button (front and shoulder straps) -too small, not permitting button to enter buttonhole. -too large, 3/8 inch or more longer than the diameter of button (measured at inside edge of purling).	X	X	
	e. Bartack omitted or loose on 1 or more buttonholes: -front buttonholes. -shoulder straps.	X	X	

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:11Z
Check the source to verify that this is the currentversion before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	f. Bartack misplaced:			
	-1 buttonhole.			X
	-2 or more buttonholes.		X	
	g. One or more broken stitches in:			
	-1 buttonhole.		X	
	-2 or more buttonholes.	X		
	-1 eyelet.		X	
	-2 or more eyelets.	X		
	h. More than two skipped stitches in one or more buttonholes or eyelets:			
	-front buttonholes.		X	
	-shoulder strap buttonholes.			X
	-1 eyelet.			X
	-2 or more eyelets.		X	
	i. Gimp omitted in one or more buttonholes.			X
	j. Ragged edges, affecting appearance.			X
	k. Poorly made, affecting appearance (unless otherwise classified).		X	
	l. Ends of gimp not pulled through on the underside on one or more buttonholes			X
	m. Stitches per buttonhole, on front and shoulder straps excluding bartack less than minimum specified:			
	-1 or 2 stitches.			X
	-3 stitches.		X	
	-4 or more stitches.	X		
	n. Any uncut buttonhole.		X	
Buttons or ring toggles (when required)	a. Missing, loose or defective:			
	-1 button or ring toggle.		X	
	-2 or more buttons or ring toggles.	X		
	b. Not specified type or size.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
NOTE: Buttons shall be considered defective if they have sharp, rough or cracked edges; scratches, blemished or imbedded foreign matter on face side of button; loose shanks; or are badly shaded.				
Cleanness	a. One or more removable spots or stains clearly noticeable.		X	
	b. One or more spots or stains of an obvious permanent nature.	X		
	c. Thread ends not trimmed, loose thread ends, 2 or more shade markings, or bastings not removed throughout garment (to be scored when the condition exists on major portion of jacket).			X
Components and assembly	a. Any defective component or defect of assembly (not herein classified).	X		
	b. Any component part or required operation omitted (not herein classified).	X		
Cutting	a. Any component part of basic material not cut in accordance with directional lines on patterns, or in accordance with specification requirements.	X		
Material defects and damages	a. Any weakening defect such as smash, multiple float, loose slub, etc., that may develop into a hole.	X		
	b. Any hole	X		
	c. Shade bars, unsightly slubs, etc.	X		
	d. Needle chews which may develop into a hole.	X		
	e. Scissors or knife cut, tear, mend or burn.	X		

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Weakening or nonweakening conditions which are inconspicuous and have negligible effect on serviceability are to be classified as follows:				
Material defect Workmanship damages	-No defect -Minor B defect			
Pressing	a. Burned or scorched.	X		
	b. Pressing omitted (entire garment).	X		
	c. Poorly pressed (unless otherwise classified).		X	
	d. Basting or pressing impressions not removed on major portion of jacket.			X
	e. Armholes not blocked or blocked poorly.		X	
	f. Inside of armholes not pressed solid.		X	
	g. Edges bulky i.e., not pressed solid, affecting appearance.			X
	h. Sleeves not creased as required on forearm and backarm seams.		X	
Seams and stitching	a. Accuracy of seaming.			
	1. Seams twisted, puckered, or pleated, affecting appearance (unless otherwise classified).		X	
	2. Part of garment caught in any unrelated operation or stitching.		X	
	3. Unsightly blindstitching exposed and visible on outside of jacket, affecting appearance.		X	

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:11Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	4. Thread breaks or ends of all stitching (when not caught in other seams or stitching) not securely backstitched.		X	
	5. Wrong shade or two shades of thread used on outside of same jacket.		X	
	b. Gage of stitching (edge of top stitching).			
	1. Irregular, i.e., unevenly gaged or various stitching not uniform, affecting appearance.		X	
	2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.			X
	c. Open seams.			
	1. On outside: -up to 1/4 inch inclusive. -more than 1/4 inch but not more than 1/2 inch. -more than 1/2 inch.	X	X	X
	2. On inside: -up to 1 inch machine felling. -more than 1 inch machine felling.		X	X
	d. Raw edges.			
	1. On outside. -up to 1/8 inch inclusive. -more than 1/8 inch but not more than 1/4 inch. -more than 1/4 inch.	X	X	X
	2. On inside (except in French seams): -more than 1/4 inch but not more than 1/2 inch. -more than 1/2 inch.		X	X

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	3. On French Seam: -more than 1 inch but not more than 2 inches. -more than 2 inches.		 X	X
	NOTE: Raw edges shall be classified as such when they occur at places where an edge is required to be turned under, or over, and stitched.			
	e. Run-offs (see classification of open seams).			
	f. Seam and stitch type.			
	1. Wrong seam type.		X	
	2. Wrong stitch type.		X	
	g. Stitch tension.			
	1. Loose tension, resulting in loose seam.	X		
	2. Loose tension on edge or raised stitching, resulting in loosely exposed bobbin thread or top thread.		X	
	3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X		
	NOTE: Puckering is evidence of tight tension. When puckering is evident, the inspector shall test seam by exerting normal pull in the lengthwise direction of seam or stitching.			
	h. Stitches per inch (including labels) less than minimum specified: -1 or 2 stitches. -3 stitches. -4 or more stitches. -1 or more on labels.	 X	 X 	X X
	NOTE: To be scored only when condition exists on major portion of seam.			
	i. Stitches skipped or broken (on edge or topstitching when seam is seamed, turned, and stitched).			

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:11Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	1. More than 1/4 inch but not more than 3/4 inch.			X
	2. More than 3/4 inch.		X	
Shaded parts	a. Any outside part shaded, affecting appearance.	X		

4.5.4.2. Detailed defects applicable to specific parts on outside of jacket. Detailed defects applicable to specific parts on outside of jacket shall be classified as follows:

Alignment and position of buttonholes and eyelets	a. Buttonhole on left front not in same horizontal position as buttonhole on right front by more than 1/2 inch.		X	
	b. Any eyelet on right front not in same position as corresponding eyelet on left front by more than 1/2 inch.		X	
	c. Position of front buttonhole from front edge: -less than 1/2 inch but not less than 3/8 inch or more than 3/4 inch but not more than 7/8 inch. -less than 3/8 inch or more than 7/8 inch.		X	X
Link buttons (when required)	Omitted.	X		
Length of front	Unbuttoned fronts unequal in length by more than 1/2 inch.		X	
Collar (construction and setting)	a. Short, i.e., causing puckers on back or fronts or pulling lapel breakline, causing fronts to roll out.		X	
	b. Long, i.e., setting away from neck or lapel, not rolling to within 2 inches of top front button or buttonholes.		X	
	c. Collar not properly set, causing decided curve or bulge on creaseline at joining to gorge seam.		X	
	d. Tight at joining to gorge seam or across back, causing fullness on lapels or			

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	fullness or pleats across outside back.	X		
	e. Eyelets positioned from outer edge or lower end of collar:			
	-less than 7/8 inch but not less than 3/4 inch.			X
	-more than 1-1/8 inches but not more than 1-1/4 inch.			X
	-more than 1-1/4 inches or less than 3/4 inch.		X	
	f. Gorge seam.			
	1. Not straight, affecting appearance.		X	
	g. Collar edge.			
	1. Crooked, affecting appearance.		X	
	2. Undercollar exposed along collar edge for distance of 3/8 inch or more, affecting appearance.		X	
	h. Top collar.			
	1. Tight, i.e., causing edges to curl or bulging on undercollar.		X	
	2. Twisted, i.e., having a diagonal twist.	X		
	3. Full, i.e., having excessive puckers or fullness.	X		
	i. Undercollar.			
	1. Interlining pleated or twisted, affecting smoothness of topcollar.		X	
	2. Interlining tight or twisted, causing puckers on undercollar.			X
	3. Tight at joining to fronts or back, causing puckers or pleats at neck of jacket.		X	
	4. Undercollar stand less than 1-1/8 inches or more than 1-3/8 inches wide at center.		X	

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:11Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Lapels	a. Lapel facings.			
	1. Twisted, short or tight, causing lapels to curl out, affecting appearance.	X		
	2. Fullness or puckers, affecting appearance.		X	
	b. Lapel edges.			
	1. Bulky, irregular, or not properly forced out, causing crooked edges, affecting appearance.		X	
	2. Front part exposed on lapel edge, affecting appearance.		X	
	c. Bridle tape.			
	1. Misplaced, not serving intended purpose.			X
	2. Tape partly on creased edge or on lapel side.		X	
	d. Collar and lapel shape.			
	1. Not uniform, i.e., left and right top edge of lapels or lower ends of collar vary in length by 1/4 inch or more.		X	
	2. Pointed ends poorly shaped or not of uniform shape, affecting appearance.		X	
Shoulder (construction)	Improperly joined or set, causing shoulders or back to twist.		X	
Shoulder pads	a. Not completely caught in armhole joining seam.		X	
	b. Misplaced, not serving intended purpose, i.e., too far back or too far forward.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Shoulder straps	a. Misplaced so that it will not lie flat when buttoned, causing bulge or twist on strap, affecting appearance.		X	
	b. Eyelet on shoulder not aligned with buttonhole, causing bulge or twist on strap when buttoned or puckers on shoulder, affecting appearance.		X	
	c. Short, i.e., rounded area of strap not completely covered by collar.		X	
	d. Long, i.e., rounded end extending beyond collar creaseline.	X		
	e. Misplaced so that shoulder seam is exposed (excepting rounded end).	X		
	f. Misplaced, i.e., one strap further forward or back from position of other strap, affecting appearance.		X	
	g. Upperside of strap full or twisted, affecting appearance.		X	
	h. Less than 2-1/4 inches or more than 2-1/2 inches wide at armhole.			X
	i. Less than 1-5/8 inches or more than 1-7/8 inches wide across center of buttonhole.			X
	j. Buttonhole 1/4 inch or more off center.		X	
	k. Buttonhole finished with purling on the underside.		X	
	l. Rounded end of shoulder strap less than 1/4 inch or more than 3/8 inch above lower edge of undercollar.			X

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	m. Back edge of shoulder strap less than 1/4 inch or more than 3/8 inch from shoulder seam at armhole seam.			X
	n. Buttons not uniformly set by more than 1/4 inch.		X	
Armhole	Armhole seam crooked, affecting appearance.		X	
Sleeves	a. Setting and hang of sleeves.			
	1. Sleeve fullness misplaced, affecting appearance.		X	
	2. Backarm seam of sleeve not matching side back seam by: - more than 1/4 inch but not more than 1/2 inch. - more than 1/2 inch.		X	X
	3. Hang of sleeves on the jacket in opposite direction by more than 2 inches.		X	
	4. Sleeve tight in armhole, affecting appearance.		X	
	b. Sleeve cuffs.			
	1. Top edge on top sleeve poorly shaped, affecting appearance.		X	
	2. Height of pointed end on both sleeves varying in length by more than 1/4 inch.		X	
	3. Sleeve puckered at joining of cuff, affecting appearance.		X	
	4. Cuff puckered or twisted at joining to sleeve, affecting appearance.		X	
	5. Ends of cuff staggered at backarm seam by: - 1/8 inch or more but not more than 1/4 inch. - more than 1/4 inch.		X	X

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	6. Height of cuff at point on top sleeve: - less than 5-3/4 inches but not less than 5-1/2 inches or more than 6-1/4 inches but not more than 6-1/2 inches. - less than 5-1/2 inches or more than 6-1/2 inches.			X
			X	
	7. Height of cuff at backarm or front creased edges: - less than 3 inches but not less than 2-3/4 inches or more than 3-1/2 inches but not more than 3-3/4 inches. - less than 2-3/4 inches or more than 3-3/4 inches.			X
			X	
	8. Point of cuff not centered between the lower forearm creased edge and the creased backarm seam by more than 1/4 inch.		X	
Body (outside)	a. Fitting of front interlining.			
	1. Tight, short, or twisted, causing fullness or twist on outside of jacket, affecting appearance.	X		
	2. Too full, causing jacket front to have a wavy appearance.		X	
	b. Waist dart.			
	1. One or both darts not properly tapered at top end, causing puckers or pleats, affecting appearance.		X	
	2. Upper end of dart not backtacked.			X
	3. Raw edges of darts not pressed toward the side seam.			X

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Front edges	a. Bottom edge stretched, affecting appearance.		X	
	b. Bottom edge stretched, puckered or uneven, affecting appearance.			X
	c. Fronts rolling outward below button.		X	
	d. Front edge irregular or not properly forced out, causing crooked or curved edges, affecting appearance.		X	
	e. Facing exposed on left front edge, affecting appearance (score only when clearly noticeable and the condition exists along major portion of seam).			X
	f. Bottom corner of one or both fronts poorly shaped, affecting appearance.		X	
Front facings	a. Short, tight or twisted, causing excessive fullness or twists on fronts.	X		
	b. Facing long, causing bottom corner to curl up.		X	
Front button-holes	a. Position from front edge by: -less than 1/2 inch but not less than 3/8 inch or more than 3/4 inch but not more than 7/8 inch.			X
	-less than 3/8 inch or more than 7/8 inch.		X	
	b. Buttonhole on left front not in same position from front edge as button on right front by more than 1/8 inch.			X
	c. Finished with purling on the underside.	X		

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

4.5.4.3 Detailed defects applicable to specific parts on inside of jacket. Detailed defects applicable to specific parts on inside of jacket shall be classified as follows.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Size label	a. Missing, incorrect, illegible or not securely caught in stitching.		X	
Hanger	a. Omitted or one or both ends not securely stitched.		X	
	b. Less than 1-3/8 inches or more than 1-5/8 inches long measured along the lower edge of topcollar.			X
Identification-instruction label	a. Omitted	X		
	b. Incorrect or illegible.		X	
	c. Not stitched on four sides.			X
	d. Bottom edge of label positioned less than 1-1/2 inches or more than 2-1/2 inches.			X
Bottom hem	Bottom hem, including binding, less than 7/8 inch or more than 1-1/8 inches wide.			X
Armhole binding	a. Omitted.	X		
	b. End of binding not turned to inside of armhole or insecurely tacked.			X

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:11Z
Check the source to verify that this is the current version before use.

4.5.4.4 Finished measurements. Any measurement deviating from nominal dimension and tolerance specified in Table II shall be classified as a size measurement defect. Sleeves uneven in length by 1/2 inch or more shall be classified as a size measurement defect.

4.5.4.5 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.5.4.1 through 4.5.4.3

Inspection Level III of MIL-STD-105

AQL's	Major	1.5 DHU
	Major and Minor A (combined)	10.0 DHU
	Total Major, Minor A and Minor B (combined)	25.0 DHU

4.5.4.4

Inspection Level S-3 of MIL-STD-105

One class	4.0 DHU

4.5.5 Examination of packaging. An examination will be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with list below. The sample unit shall be one shipping container fully packaged, selected just prior to closing operation. Defects of closure listed below shall be examined on a shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and AQL shall be 2.5 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of case liners and container flaps; loose strapping and inadequate stapling. Bulging or distortion of containers.
Content	Number of jackets per shipping container is more or less than required.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each jacket, in the buttoned position, shall be folded to approximately 12 by 11 inches and placed in an individual polyethylene bag measuring 18 by 12 inches with a 1-inch lip along the 12-inch dimension. The polyethylene flexible film shall be 0.0015 inch thick. Prior to or during the final sealing operation, excess air within the bag shall be expelled. Each bag shall contain a label (see 5.3).

5.1.2 Commercial. Jackets shall be packaged in accordance with the manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A

5.2.1.1 Method 1. Twenty-five (25) jackets of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner, conforming to class-weather resistant, size 3A or MIL-B-17757 and assembled, closed, and strapped in accordance with appendix thereto. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.1.2 Method 2. When specified (see 6.2), three level B shipping containers shall be packed in a fiberboard shipping container, conforming to class weather resistant, size 4 of MIL-B-17757 and assembled, closed, and strapped in accordance with appendix thereto. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Twenty-five (25) jackets of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner, conforming to class domestic, size 3A of MIL-B-17757 and assembled and closed in accordance with appendix thereto. The fiberboard used in fabricating the box and liner shall be grade 275. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Commercial. Jackets, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification and the U. S. Postal Service Manual, as applicable.

5.3 Marking. In addition to any special marking required by the contract or purchase order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be inserted within each polyethylene bag in order to permit ready identification:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.

Nomenclature
Size_____Stock Number_____
Contract Number
Name of Contractor

5.3.1 Label. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 or 4 inches with the words, designating the combination, plainly stamped or printed thereon and under these words shall be legibly printed the correct quantity of each contained therein.

6. NOTES

6.1 Intended use. The jackets described herein are intended for wear by male officer personnel of the U. S. Marine Corps.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Sizes required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of jackets in first article (see 3.2).
(e) Whether buttons are required (see 3.3.6).
(f) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(g) When level A, method 2, packing is required (see 5.2.1.2).

6.2.2 Data Requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL), the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DAR 7-104.9 (n) (2) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs.

Paragraph no.	Data requirements	Applicable DID no.	Options
(a) 4	Inspection system program plan	DI-R-4803	----
(b) 4.4	First Article Inspection Procedures	DI-T-4901	----
(c) 4.4	First Article Inspection Report	DI-T-4902	----
(d) 4.5	Production/Acceptance Inspection Procedures	DI-T-4903	----
(e) 4.5	Production Inspection Report	DI-T-4904	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Guide samples. For information regarding availability of sample of the jacket and of standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figures 1, 2 and 3 show the general design of the jackets and are furnished for information only. In the event of conflict between the figures and text of this specification, the text of this specification shall govern.

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing activity:
Navy - MC
Project NO. 8405-N953

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.

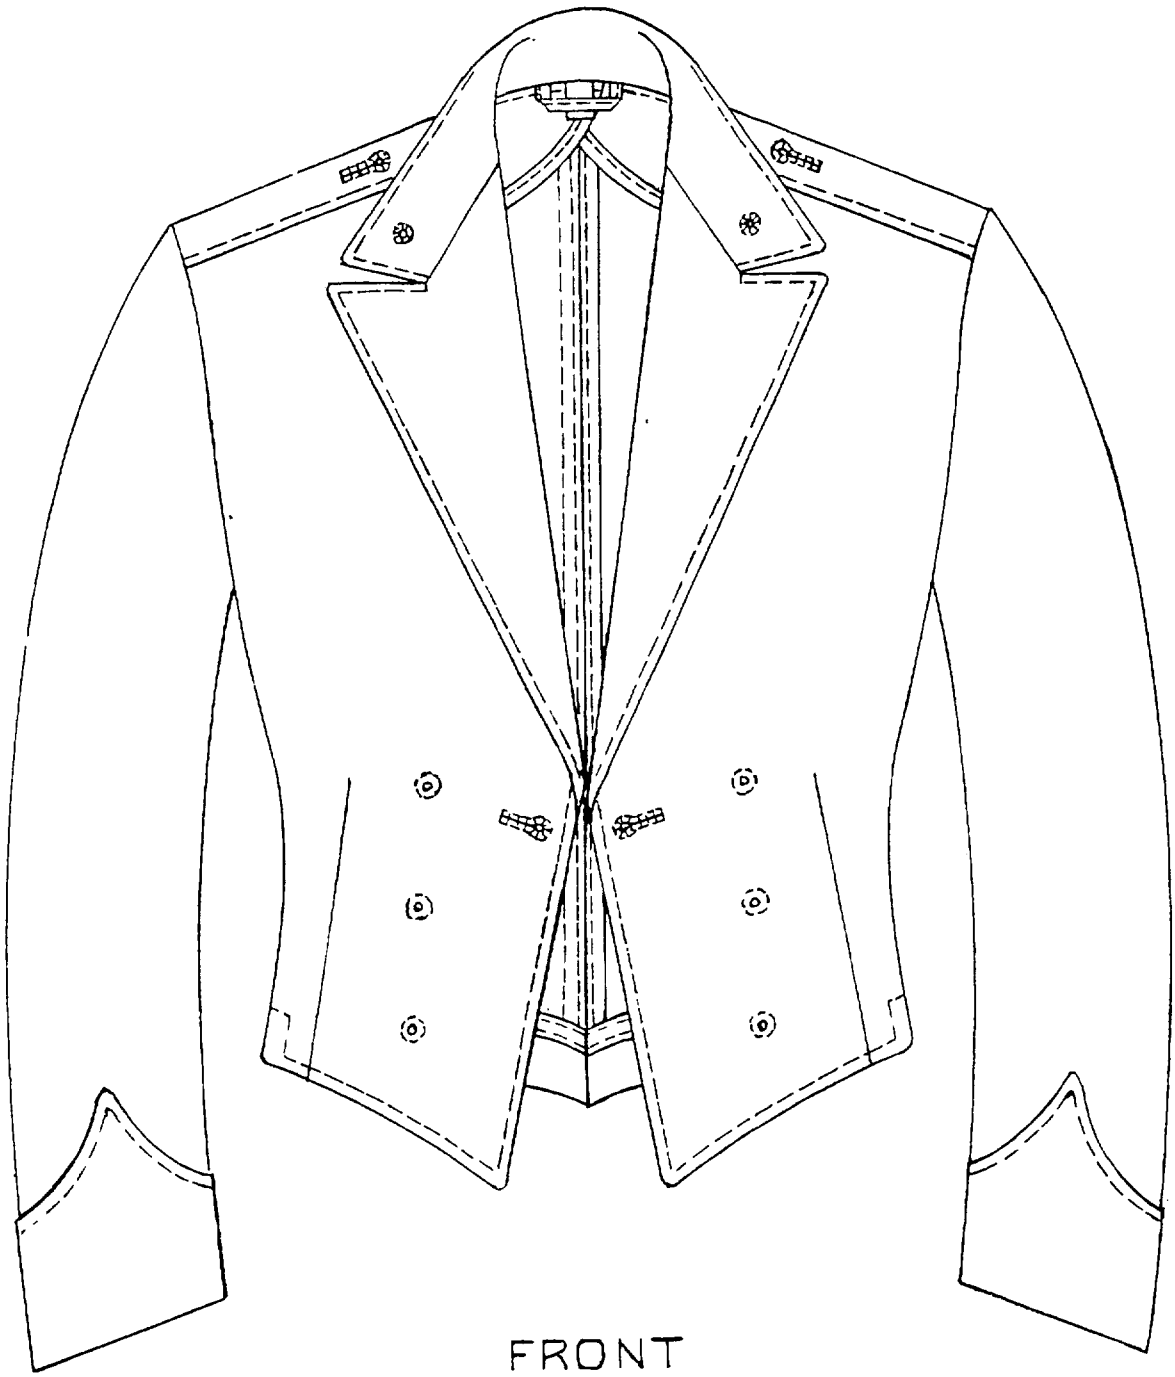


FIGURE 1. JACKET, MAN'S: MESS; WHITE; (STAFF, NON COMMISSIONED OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.


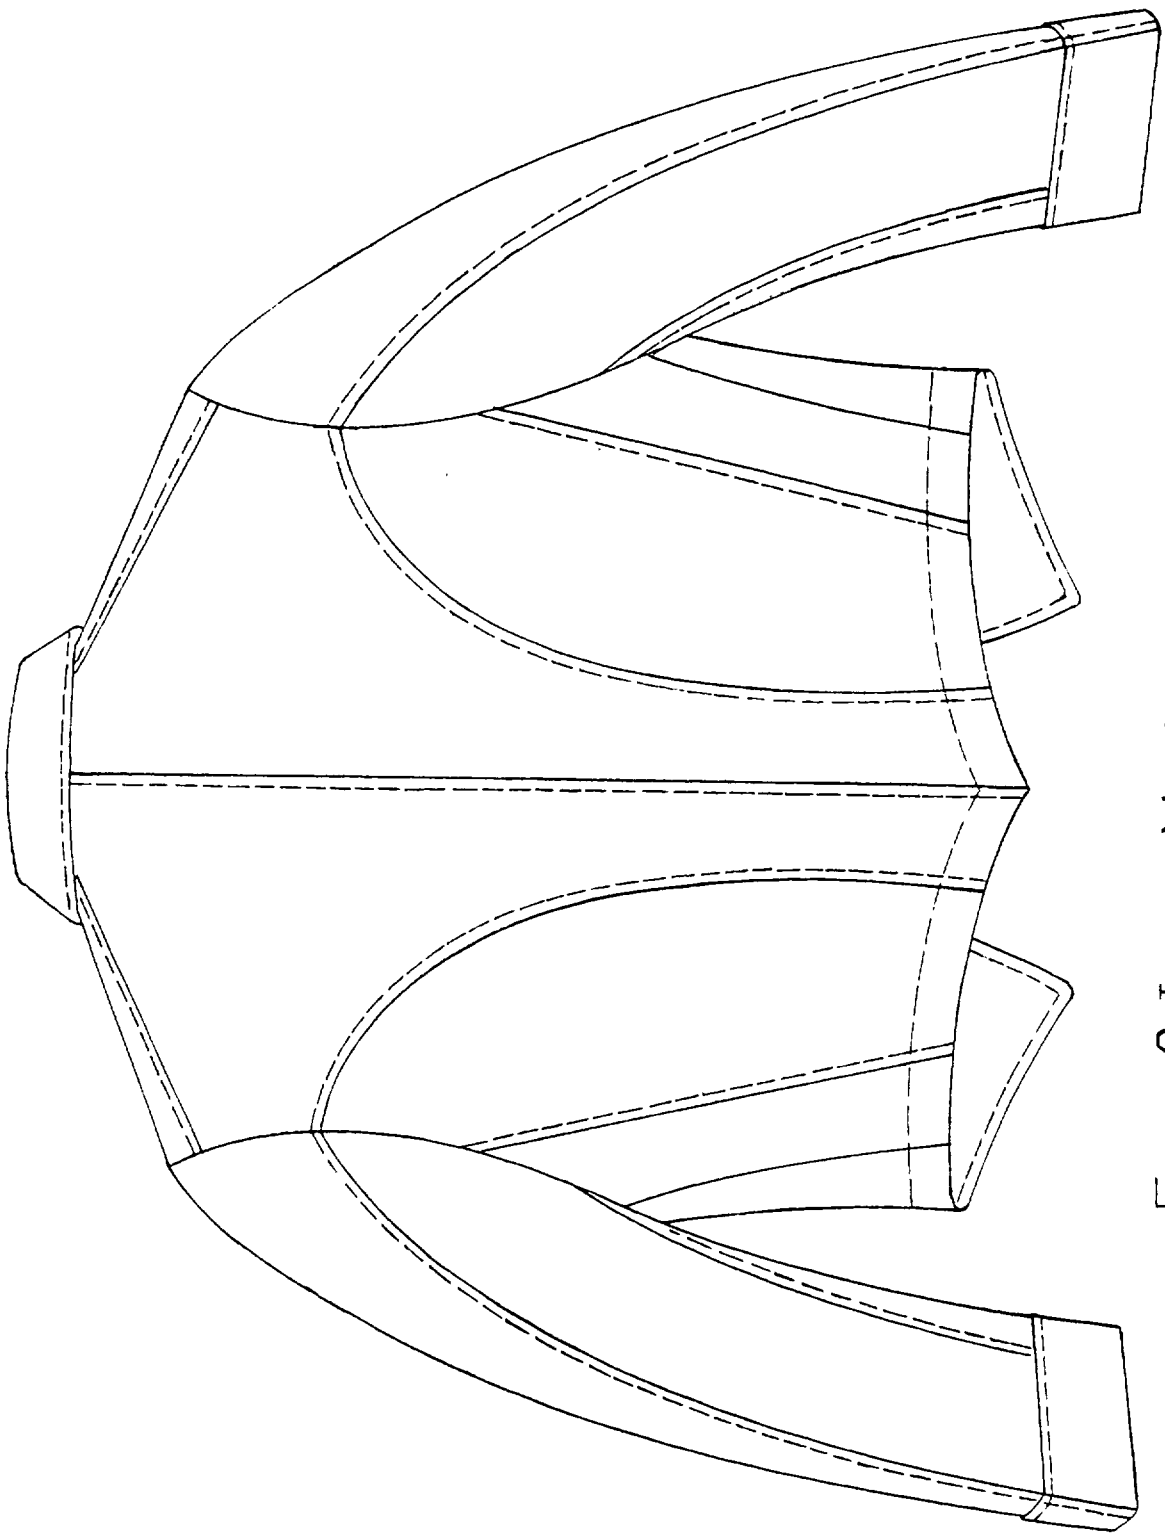


FIGURE 2. JACKET, MAN'S: MESS; WHITE; (STAFF, NON COMMISSIONED OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.

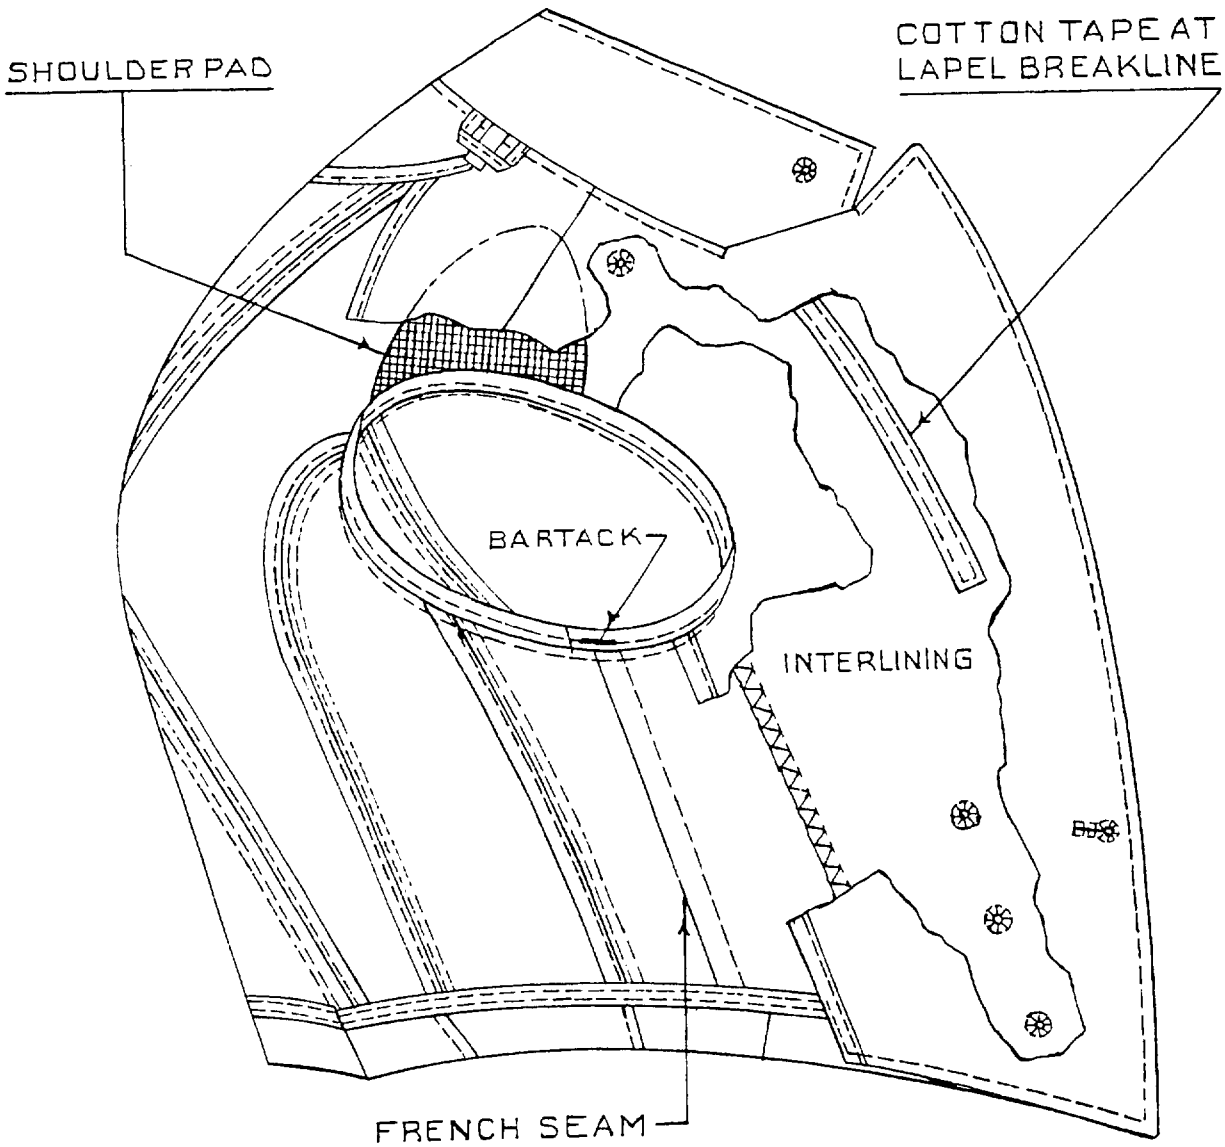

DETAIL: INSIDE LEFT FRONT

FIGURE 3. JACKET, MAN'S: MESS; WHITE; (STAFF, NON COMMISSIONED OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-J-28976A(MC)	Jacket, Men's: Mess, White (Staff, Noncommissioned Officers)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commandant of the Marine Corps
Headquarters, U. S. Marine Corps
Attn: Code LMA-1
Washington, D. C. 20380

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:11Z
Check the source to verify that this is the current version before use.