MILITARY SPECIFICATION

RAINCOAT, MAN'S: LIGHTWEIGHT, POLYURETHANE COATED

1. SCOPE

1.1 Scope. This specification covers requirements for a lightweight raincoat fabricated from a polyester material coated on back side with polyurethane.

1.2 Classification. The raincoat shall be of one type in the following sizes as specified (see 6.2):

Schedule of sizes

Regular	Long	Extra Long
32		
34		
36	36	36
38	38	38
40	40	40
42	42	42
44	44	44
46	46	46
48	48	

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, And Button, Staple, (Plastic).
V-T-276	- Thread, Cotton.
V-T-280	- Thread, Cotton Gimp, Buttonhole.
UU-P-553	- Paper, Wrapping, Tissue.
DDD-L-20	- Labels; For Clothing, Equipage, And Tentage, (General Use).

MILITARY

MIL-T-3530	- Thread And Twine; Mildew Resistant Or Water - Repellent Treated.
MIL-B-17757	Boxes, Fiber, Corrugated (Modular Sizes).
MIL-C-29102	- Cloth, Coated, Polyurethane On Polyester.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the currentversion before use.

STANDARDS

FEDERAL

FED-STD-175	- Adhesives; Methods of Testing.
FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitch, Seam, And Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, a first article consisting of the number of finished raincoats specified by the procuring activity (see 6.2) shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Coated fabric. The coated fabric shall be cloth, coated, polyurethane on polyester conforming to MIL-C-29102, except the base cloth and coated cloth shall be dark blue shade 2323 (see 6.3).

3.3.1.1 Care and storage of coated fabric. The coated fabric shall be stored in a safe, dry, clean place on platforms or shelves at least 6 inches off the floor and covered to protect the fabric. Rolls of fabric shall never be placed upright on end. The cloth shall be sorted into similar widths and lengths for cutting. Work in process shall not be piled on the floor, but shall be placed on work benches, tables or pallets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:10Z
Check the source to verify that this is the current version before use.

3.3.2 Interlining. The interlining shall be cut from the material specified in 3.3.1.

3.3.3 Reinforcement pieces. The underarm eyelet reinforcement pieces shall be cut from the material specified in 3.3.1.

3.3.4. Primer. The primer required for pretreating the seams of the raincoat prior to application of the seam sealant shall be a suitable air drying acetone solvent, silicone primer. 1/

3.3.5 Seam sealant. The substance required for sealing the seams of the raincoat shall be a brushable silicone rubber dispersed in toluene, which vulcanizes when exposed to moisture in the atmosphere. 1/ The sealant, when cured, shall have a clean, dull appearance. A minimum dry time of 24 hours at 77° ±2°F and 50 ±5 percent relative humidity is required for proper curing of the sealant. The sealant may be applied to the seams as soon as the solvent (acetone) has evaporated from the primer and shall produce a transparent film. When tested as specified in Section 4, Table IV, the seam sealant shall comply with the requirements specified in Table I.

Table I - Physical requirements of seam sealant

	Minimum	Maximum
Hydrostatic resistance of seams		
initial	No leakage 1/	-
after resistance to low temperature	No leakage 1/ 2/	
Blocking of seams (160°F) scale rating		No. 3 (see 3.9.1)
Solids content, percent	40	

1/ See 4.3.1.2(c) for definition of "leakage".
2/ After exposure to low temperature, the seam sealant shall show no cracking, flaking or separation from the fabric.

3.3.6 Seam dusting material. To prevent blocking, all sealant areas shall be dusted with powdered mica not coarser than 160 mesh when tested as specified in Section 4, Table IV.

3.3.7 Thread, cotton. The thread shall conform to V-T-276 and shall be in the following types and sizes:

Operation	Type	Size	
		Needle	Bobbin or looper
Seaming and stitching (single needle)	IC2	00/3	00/3
Seaming and stitching (double needle)	IC2	00/3	000/3
Buttonholes	IC2	A/3	A/3
Button sewing	IB3	30/4	30/4

1/ Primers and sealants such as the following have been found satisfactory for the seam sealing requirements of this specification:

Dow Corning Silastic 1201 RTV
Silicone Primer, or equal
Dow Corning Silastic 79-059
Silicone Rubber (Dispersed in Toluene)Sealant, or equal

A minimum of three coats of seam sealant has been found necessary to meet the hydrostatic requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:10Z
Check the source to verify that this is the current version before use.

The thread shall be water repellent treated to conform to type II, class 1 of MIL-T-3530. The thread or fabric shall not be lubricated by any means prior to or during seaming.

3.3.7.1 Color and colorfastness. The thread shall be dyed black shade AA, cable No. 66043. The dyed thread shall show fastness to laundering and light equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show good fastness to laundering and light.

3.3.8 Gimp. The buttonhole gimp shall be cotton, No. 8 soft or glazed finish, conforming to type I or II of V-T-280. The color of the gimp shall be black shade AA, cable No. 66043. The dyed gimp shall show fastness to laundering and light equal to or better than the standard sample. When no standard sample is available, the dyed gimp shall show good fastness to laundering and light.

3.3.9 Buttons. The buttons shall conform to type II, class D of V-B-871 and shall be style 15 in size 18-line and styles 20 and 21 in sizes 30- and 45-line. The buttons shall have a glossy finish and the color shall be black BT, Cable No. 62001.

3.3.10 Eyelets. Ventilating eyelets shall be made of aluminum 0.016 ±0.0015 inch gage, and shall conform to the following finished requirements:

Outside diameter of flange	- 0.485 to 0.500 inch
Outside diameter of barrel	- 0.277 to 0.283 inch
Diameter of hole	- 0.220 to 0.230 inch
Overall length	- 0.215 to 0.230 inch

After fabrication of the eyelets, they shall be top rolled and coated with two coats of enamel. The color of the enamel shall closely match the color of the coated fabric.

3.3.11 Labels. Each raincoat shall have an identification label, a size label, and an instruction label. The raincoat is not intended to be laundered or dry cleaned; the labels shall be fast only to the laundering transference test specified in DDD-L-20 except that colorfastness of labels is not required. If the labels are clearly legible after laundering, they shall be rated satisfactory.

3.3.11.1 Identification label. The identification label shall conform to type I, class 12 of DDD-L-20 and shall contain the following information:

Nomenclature (item description)
Contract number
Name of contractor

3.3.11.2 Size label. The size label shall conform to type I, class 2 of DDD-L-20. The data for the size label shall be arranged as follows:

Regular - 38	Long - 38	Extra Long - 38
Stock number	Stock number	Stock number

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

3.3.11.3 Instruction label. The instruction label shall conform to type I, class 13 of DDD-L-20. The information on the instruction label shall be as follows:

CLEANING INSTRUCTIONS

1. Do not dry clean, launder or press.
2. Remove ordinary spots by rubbing gently with mild soap or detergent and water.
3. When not in use, hang at full length to remove wrinkles.

3.3.11.4 Combined labels. The identification label and instruction label may be combined in one label. When these labels are combined, the combination label shall conform to type I, class 12 and 13 of DDD-L-20.

3.4 Design. The raincoats shall be the U. S. Marine Corps design shown in Figures 1 through 3, a four-button, double-breasted design with shoulder straps, inside hanging pockets, and two-piece sleeves.

3.5 Patterns. Standard patterns will be furnished to the supplier by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the supplier's working patterns. The supplier's working pattern shall be identical to the standard patterns. The standard patterns shall provide 1/4 inch seam allowance for all seams except as otherwise specified in Table II. Standard patterns show size, seam allowances, directional lines for cutting, and are marked or notched for proper placement and assembly of the component parts.

3.5.1 List of pattern parts. Raincoats shall be cut from the materials specified herein in accordance with the number of pattern parts indicated below:

Item	Pattern nomenclature Material: Cloth, coated polyurethane on polyester	No. of cut parts
1.	Front	2
2.	Back	2
3.	Topcollar	1
4.	Undercollar	1
5.	Topcollar stand	1
6.	Undercollar stand	1
7.	Topsleeve	2
8.	Undersleeve	2
9.	Shoulder straps	4
10.	Inside hanging pocket,front part	2
11.	Inside hanging pocket,back part	2
12.	Front facings	2
13.	Back pleat facing	1
14.	Pocket welt	2
15.	Pocket facing	2
16.	Left facing buttonhole tab	2
17.	Underarm eyelet reinforcement piece	2
18.	Shoulder strap interlining	2
19.	Front facing interlining	2
20.	Collar stand interlining	1
21.	Collar interlining	1
	Marker	
	Button and buttonhole marker	
	Undercollar marker	

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:10Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Manufacturing requirements. The raincoats shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table II.

3.6.1.1 Operations. The supplier is not required to follow the exact sequence of the operations as listed in Table II, but all operations specified shall be used to manufacture the raincoats.

3.6.1.2 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in Table II shall conform to FED-STD-751. Whenever two or more methods, seams or stitches are given for the same part of the operations, any one of them may be used. Where stitch type 401 is used, the looper thread, that is the under thread, shall be on the inside of the garment. The finest size needle possible is to be used for seaming and stitching operations. The number of stitches per inch specified in Table II indicates the minimum and maximum number permitted. The starting and finishing ends of double needle, double lapped seams shall be even. Trimming is not permitted.

3.6.1.2.1 Ends of seams and stitching. Ends of seams and stitchings (stitch type 301), except the ends of a continuous line of stitching, when not caught in another seam or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitching types) shall be secured by stitching back of the break not less than 1/2 inch. When stitch type 401 is used, ends of seam and stitching shall be caught in other seams or stitching, and skipped stitches and thread breaks may be repaired using stitch type 301 backstitched not less than 1/2 inch on each side of the skip or break.

3.6.1.3 Shade marking. The component parts of the raincoat, except those parts which may be cut from ends shall be shade marked to insure a uniform shade and size throughout. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.

(b) Sew-on shade tickets.

(c) Adhesive type tickets whose adhesive causes discoloration or whose adhesive mass adheres to the material upon removal of the tickets.

(d) Any marking medium which would tend to leave a permanent mark.

The use of numbering machine, ink stamp or pencil will be allowed provided the numbering does not show through on the outside of the raincoat and wherever possible is covered by the seam allowance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seams or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting. a. Cloth shall be carefully laid up in uniform widths and lengths and care must be taken in the spreading of the material so that the plies are not stretched or full and that one side of the lay is even. Each component part in the top ply of the main lay shall be marked with the size of the garment. The use of holding devices (such as staples) on the paper pattern parts is prohibited on the basic fabric. b. Cut the material in strict accordance with the patterns furnished by the Government. c. Cut the material in the direction of warp as indicated by directional lines on the pattern and with the uncoated side of the fabric to finish on the outside of the raincoat. d. Cut all component parts from one piece of the basic material, except the following parts may be cut from ends, but when so cut, the parts shall harmonize with the shade of the raincoat: underply of shoulder straps, underarm eyelet reinforcement piece, front facing tab, hanging pockets, pocket facing, raincoat hanger and interlining for collar, collar stand, shoulder straps and front facings. The raincoat hanger may be cut on the bias or in the warp or filling direction and shall be 1 inch wide. e. Cut the interlining for the collar, collar stand, shoulder straps, and front facings in accordance with directional lines on patterns. f. The use of drill holes is prohibited except for marking the position of the underarm eyelets, and at each end of the pocket opening, as indicated on pattern.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting. (cont'd)					
	g. Hanging pocket openings may be cut in the cutting room in accordance with marks on pattern.					
	h. Position for pocket welt openings may be cut in the cutting room with a die, provided the side of the opening is as indicated on patterns and corners are not tongue notched.					
2.	Replacement of damaged parts.					
	a. Replace at time of cutting all parts containing holes or other basic fabric defects, such as smashes, slubs or multiple floats.					
	b. Discard and replace, prior to joining to the finished raincoat, all component parts which are damaged by needle chews, scissors or knife cuts, tears, or holes.					
	c. There shall be no replacement of parts or removal or replacement of stitching after assembly of the finished raincoat (except as specified in 2.d. below).					
	d. Needle holes caused by run-offs, repairs or removal of thread for a distance not exceeding 8 stitches (single or double row) will be accepted providing the needle holes are sealed.					
3.	Shade marking.					
	a. Mark all component parts to insure a uniform shade and proper assembly throughout the garment, except those parts which may be cut from ends (see 1.d.).					
	b. Shade marking shall be in accordance with 3.6.1.3.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
4.	Attach eyelet reinforcement piece.					
	a. Position eyelet reinforcement piece to the underarm of the raincoat on the inside fronts, with the notch in reinforcement piece in line with notch in lower edge of armhole and the upper edge of reinforcement piece approximately 5/8 inch below lower edge of armhole. Seam reinforcement piece to the fronts 1/16 inch from raw edges.	301	LSa-1	10-14	A	A
5.	Attach underarm eyelets to fronts.					
	Finished appearance. The eyelets shall be securely clinched on the inside of the raincoat without distorting or cutting the material or splitting the flange of the eyelets.					
	a. Attach four metal eyelets to the fronts, through the underarm reinforcement piece, at the locations indicated by the marks on the pattern.					
6.	Make raincoat hanger.					
	Finished appearance. The finished hanger shall be uniform in width and gage. The edge stitching shall be uniform.					
	a. Fold the 1-inch-wide strip for the hanger in half lengthwise, turning the edges to the inside, and seam 1/16 inch from the turned and folded edges. The hanger shall finish 1/4 inch wide.	301	EFp-2	10-14	00/3	00/3
	b. Cut the hanger 3-1/2 ±1/8 inches long.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
7.	Make pocket welt. Finished appearance. The welts shall be uniformly made and stitched.					
	a. Fold welt in half lengthwise, with the coated side out, and close each end of the welt with a 1/4-inch seam.	301	SSe-2 (a) (each end)	10-14	00/3	00/3
	b. Turn welt, completely working out seamed edges and corners.					
	c. Topstitch the welt uniformly 1/4 inch from seamed and folded edges.	301	SSe-2 (b) (seamed edges) OSf-1 (folded edge)	10-14	00/3	00/3
8.	Make shoulder straps. Finished appearance. The shoulder straps shall finish smooth and flat, without twists, pleats, puckers, or raw edges and shall be uniform in appearance. The points and edges shall be neatly and completely worked out. The gage of the stitching shall be uniform in width.					
	a. The shoulder straps shall be made of three pieces of basic material.					
	b. Position the interlining (uncoated side out) on shoulder strap pieces (coated side out), and with edges at front, back and pointed end even. Seam the interlining and the shoulder strap pieces together 1/4 inch from edges at front, back, and pointed ends.	301	SSe-2 (a)	10-14	00/3	00/3
	c. Trim corners and point, for proper turning. Turn straps, completely working out point and seamed edges. Topstitch straps uniformly 1/8 inch from seamed edges.	301	SSe-2 (b)	10-14	00/3	00/3
	d. On the finished raincoat, the strap shall measure 2-5/8 ±1/8 inches wide at armhole seam and shall taper to 1-7/8 ±1/8 inches wide at the eyelet end of the buttonhole.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
9.	Make buttonholes in shoulder straps. Finished appearance. The buttonholes shall be clean cut, well made, and correctly positioned. The buttonholes shall be well worked over gimp to fit a 30-line sewing hole button. The purling shall be on the outside of the strap.					
	a. Make one horizontal eyelet-end taper-bar type buttonhole, cut 3/4 inch long, in each strap, midway between the back and front edges. The inside edge of the eyelet end of the buttonhole shall be 3/4 ±1/8 inch from the pointed end of straps.	Buttonhole		54 per buttonhole including bar	A/3	A/3
10.	Make left facing buttonhole tab. Finished appearance. The left facing buttonhole tab shall finish smooth and flat, without twists, pleats, puckers, or raw edges. The points and edges shall be neatly and completely worked out. The gage of the stitching shall be uniform in width.					
	a. The tab shall be made of two plies of the basic material.					
	b. Seam the two plies of the tab together with coated side out, 1/4 inch from edges at top, bottom and pointed end.	301	SSe-2 (a)	10-14	00/3	00/3
	c. Trim corners and point and turn tab, completely working out point and seamed edges. Topstitch the tab uniformly 1/8 inch from seamed edges.	301	SSe-2 (b)	10-14	00/3	00/3
11.	Make buttonhole in tab. Finished appearance. The buttonhole shall be clean cut, well made, and correctly positioned. The buttonhole shall be well worked over gimp to fit a 30-line sewing hole button. The purling shall be on the outside of the tab.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seams or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
11.	Make buttonhole in tab. (cont'd)					
	a. Make one horizontal eyelet-end taper-bar type buttonhole, cut 3/4 inch long, midway between top and bottom edges of tab with the inside edge of the eyelet end of the buttonhole 3/4 ±1/8 inch from pointed end	Buttonhole		54 per buttonhole including bar	A/3	A/3
12.	Make sleeves.					
	Finished appearance. The sleeves shall be uniform in width and appearance. The double-lapped seams shall be smooth and flat without gathers, puckers, pleats or raw edges. All seams shall start and finish evenly. The topsleeve shall be over the undersleeve.					
	a. Join topsleeve and undersleeve together at the forearm with a double-lapped and double-stitched seam, with topsleeve overlapping the undersleeve. The double row of stitches shall be 3/16-inch gage, with the outer row 1/16 inch from the finished edge.	301 or 401	LSc-2	10-14	00/3	000/3
	b. Join the topsleeve and undersleeve at backarm with a double-lapped and double-stitched seam with topsleeve overlapping the undersleeve. The double row of stitches shall be 3/16-inch gage, with the outer row 1/16 inch from the finished edge.	301 or 401	LSc-2	10-14	00/3	000/3
13.	Hem sleeves.					
	Finished appearance. The hem shall be uniform in width, without pleats, puckers or twists.					
	a. Hem bottom end of sleeve, with the raw edge turned under 3/8 inch and caught in the stitching 1/16 inch from folded upper edge. Bottom hem shall be formed after joining of the sleeve seams.	301	EFb-1	10-14	00/3	00/3
	b. In the finished raincoat, the hem shall be 3/4 ±1/8 inch wide.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
14.	Make hanging pocket. Finished appearance. The pockets shall finish flat and smooth without twists, puckers, or raw edges. The stitching shall be uniform in width. The tongue notch shall not be exposed. The finished pocket shall have the uncoated side of the material to the inside of the pocket. a. The hanging pocket shall be made of two pieces of basic material. b. Cut the opening (when not cut in cutting room) in front part of pocket as indicated by marks on pattern. Tongue notch bottom end of opening.					
	c. Position the identification and instruction labels (combined or separate) at the outside center of left hanging pocket, approximately 1 inch above the bottom edge of pocket. When separate labels are used, the labels shall be attached one above the other with the identification label at bottom. The labels shall be positioned on the part of the pocket which will be against the body of the wearer. Seam labels to pocket 1/16 to 1/8 inch from each edge.	301	SSa-1 (each edge)	10-14	00/3	00/3
	d. Position hanging pocket pieces together, with uncoated side out and raw edges even. Join the two pieces together 1/4 inch from raw edges. e. Turn pocket, completely working out seamed edges and corners. Corners may be trimmed for proper turning.	301	SSe-2 (a)	10-14	00/3	00/3
	f. Topstitch pocket 1/8 inch from seamed edges.	301	SSe-2 (b) (seamed edges)	10-14	00/3	00/3
	g. Turn under the back raw edge of pocket opening 3/16 inch and stitch 1/8 inch from folded edge. The stitching shall extend the length of the opening.	301	LSd-1 (back edge of opening)	10-14	00/3	00/3

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g.	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
15.	Make collar. Finished appearance. The points and edges of the collar shall be neatly and completely worked out. The points shall be uniform in length. The plies shall lie smooth and flat without distortion. The gage of stitching shall be uniform in width. a. The collar leaf and collar stand shall each be made of three pieces of the basic material.					
	b. Seam interlining and undercollar leaf together 1/8 inch from each edge. Mark the undercollar at side and top edges in accordance with the shape of the pattern. Trim excess interlining along edges, where necessary.	301	SSa-1 (each edge)	8-12	00/3	00/3
	c. Seam interlining and undercollar stand together 1/8 inch from top and lower edge. Trim excess interlining along edges, where necessary.	301	SSa-1 (each edge)	8-12	00/3	00/3
	d. Position undercollar stand on outside of undercollar leaf with notches matching and join together at the lower edge with a 1/4-inch seam.	301	LSq-2 (a)	10-14	00/3	00/3
	e. Turn undercollar stand and stitch 1/16 inch from raised edge.	301	LSq-2 (b)	10-14	00/3	00/3
	f. Position topcollar stand on outside of topcollar leaf with notches matching and join together at lower edge with a 1/4-inch seam.	301	LSq-2 (a)	10-14	00/3	00/3
	g. Turn topcollar stand and stitch 1/16 inch from raised edge.	301	LSq-2 (b)	10-14	00/3	00/3
	h. Properly position undercollar and topcollar together and seam at marks along top and side edges.	301	SSe-2 (a)	10-14	00/3	00/3
	i. Trim corners for proper turning. Turn collar, completely working out the seamed edges and point. Topstitch collar uniformly 1/8 inch from seamed edges, and continue stitching topcollar and undercollar together along the gorge to approximately 1 inch beyond collar stand seam. Trim excess material along gorge where necessary.	301	SSe-2 (b) SSa-1 (gorge)	10-14	00/3	00/3

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:10Z
Check the source to verify that this is the currenversion before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
16.	**Set welt, facing, and hanging pocket.** **Finished appearance. The welt, facing, and hanging pocket shall be set to the fronts smooth and flat, without twists, puckers, raw edges, or distortion. The gage of stitching shall be uniform. The tongue notches of the pocket opening in fronts shall not be exposed.**					
	a. The pocket opening may be cut prior to setting of pocket welt and hanging pocket to fronts (when not cut in cutting room).					
	b. Position welts on outside of fronts with raw edges matching marks indicated by pattern. When pocket opening in **front is cut as specified in 16.a., the welt** shall **be positioned with raw edge even with the raw front edge of pocket opening. Join welt to fronts with a 1/4-inch seam. Tongue notch pocket opening in fronts at top and bottom ends.**	301	SSq-2 (a)	10-14	00/3	00/3
	c. Position hanging pocket on the outside of fronts with the raw edge even with the edge of pocket opening. Seam pocket to welt and front with the stitching back of the welt joining seam.	301	SSq-2 (a)	10-14	00/3	00/3
	d. Fold facing in half lengthwise, with coated side in. Position **facing on outside of fronts at the back edge of pocket opening with raw edges even. Seam facing to pocket opening 1/4 inch from raw edges.**	301	SSe-2 (a)	10-14	00/3	00/3
	e. Turn facing to inside of pocket opening and topstitch 1/16 inch from back folded edge.	301	SSe-2 (b)	10-14	00/3	00/3
	f. Turn pocket and raw edge of welt through opening to inside. Smooth out the pocket and pocket welt and stitch the fronts 1/16 inch from raised edge through welt and front part of pocket.	301	SSq-2 (b)	10-14	00/3	00/3
	g. Stitch top and bottom ends of welt to the fronts through the hanging pocket from the raised seam at front edge of welt to the back edge of welt. Stitch diagonally to outer corner of topstitching of the welt and continue on the line	301	LSa-2	10-14	00/3	00/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
16.	Set welt, facing, and hanging pocket. (cont'd)					
	of topstitching at each end of the welt to the stitching at the seam. Continue on the line of stitching of the raised seam to the outer row, and backtack approximately 1/2 inch along the outer row. The outer row of stitching at top and bottom ends of welt shall be uniformly 1/16 inch from the ends.					
17.	Set left facing tab.					
	Finished appearance. The left facing tab shall be correctly positioned without twists or puckers. The pointed end shall not be exposed beyond the front edge of the left front.					
	a. Position tab on left facing at marks indicated on pattern, with the pointed end towards the back edge of the facing and with the front end of the buttonhole eyelet even with back edge of the facing only. Seam tab to facing 3/16 inch from raw edge.	301	LSq-2 (a)	10-14	00/3	00/3
	b. Turn tab with pointed end towards the front, and raise stitch tab to facing only 1/4 inch from folded edge of tab. Continue the stitching on the line of topstitching at top edge of tab to a point in line with front end of buttonhole in tab.	301	LSq-2 (b) (folded edge of tab) SSa-1 (top edge)	10-14	00/3	00/3
18.	Interline facings.					
	Finished appearance. The interlining shall be smooth and flat.					
	a. Position the interlining on the outside right and left facings with front, top, and back edges even. Seam interlining to facing 3/16 inch from raw back edge.	301	SSe-2 (a)	10-14	00/3	00/3
	b. Turn interlining to inside of facing and topstitch 1/16 inch from seamed edge. Turn under the raw back edge of facing from bottom edge of interlining to bottom edge of facing 3/16 inch, and continue to stitch 1/16 inch from folded edge.	301	SSe-2 (b) (interlining facing seam) EFa-1 (back edge of facing)	10-14	00/3	00/3

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seams or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
18.	Interline facings. (cont'd)					
	c. Seam interlining and facing together 1/8 inch from top and front raw edges.	301	SSa-1	10-14	00/3	00/3
19.	Join facings to fronts.					
	Finished appearance. The right and left lapel step and width of facing shall be uniformly stitched.					
	a. Seam the right and left facings to outside of respective fronts 1/4 inch from top and front edges of lapel and front and bottom edges of raincoat. The stitching shall extend from lapel notch to back edge of facing.	301	SSe-2 (a) (each edge)	10-14	00/3	00/3
20.	Make back.					
	Finished appearance. The center back seam of the raincoat shall be carefully joined without twists, puckers, pleats, or raw edges. The seam shall start and finish evenly. The gage of stitching shall be uniform in width. The left back part shall be over the right back part.					
	a. Join back parts together at the center back from top end of vent to top edge of raincoat with a double-lapped and double-stitched seam. The double row of stitching shall be 3/16-inch gage, with the outer row 1/16 inch from the finished edge.	301	LSc-2	10-14	00/3	000/3
		or 401	LSc-2	10-14	00/3	000/3
21.	Stitch hanger and label to raincoat.					
	a. Stitch upper edge of size label and the ends of raincoat hanger to the inside center back of raincoat at the neck	301	SSa-1	10-14	00/3	00/3
	b. In the finished raincoat, the hanger opening shall be 1-1/4 $\pm$1/4 inches long when measured along the lower edge of the topcollar.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seams or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
22.	Join back pleat facing to back.					
	Finished appearance. The back pleat facing shall be uniformly joined to the left and right back parts at the vent without twists, puckers, gathers, pleats or raw edges.					
	a. Position the back pleat facing on the left and right back, respectively, with coated side face to face and with bottom and side edges even.					
	b. Join left and right side of facing, respectively, to right and left back 1/8 inch from raw edge.	301	SSae-2 (a)	10-14	00/3	00/3
	c. Turn the facing back at the seam and topstitch 1/4 to 5/16 inch from seamed edges from bottom of back to top edge of facing.	301	SSae-2 (b)	10-14	00/3	00/3
	d. Turn the left vent flat against the inside of left backpart in accordance with notch. Edgestitch left vent 1/16 inch from the folded edge.	301	OSf-1	10-14	00/3	00/3
	e. Turn the right vent flat against the inside of right back part in accordance with notch. Edgestitch right vent 1/16 inch from folded edge.	301	OSf-1	10-14	00/3	00/3
	f. Form triangle by turning under top edge of facing forming a point, and seaming to back along top edges, 1/16 to 3/32 inch from front edges, continuing down sides for a distance of 5/8 to 3/4 inch and continuing directly across width of pleat with two rows of stitching 3/16-to 1/4-inch gage, closing pleat. Point of pleat facing shall be centered on center back seam (±1/8 inch off center tolerance).	301		10-14	00/3	00/3

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
23.	Join front and back at sides.					
	Finished appearance. The side seams of the raincoat shall be carefully joined without twists, puckers, pleats, or raw edges. The seams shall start and finish evenly. The gage of stitching shall be uniform in width. The fronts shall be over the backs.					
	a. Join front and back together at the sides with double-lapped and double-stitched seams.The double rows of stitches shall be 3/16-inch gage, with the outer row 1/16 inch from finished edge.	301	LSc-2	10-14	00/3	000/3
		or 401	LSc-2	10-14	00/3	000/3
24.	Seam shoulders.					
	Finished appearance. The shoulder seams of the raincoat shall be carefully joined without twists, puckers, pleats or raw edges. The seams shall start and finish evenly. The gage of stitching shall be uniform in width. The back shall be over the fronts.					
	a. Join back and fronts together at the shoulders with a double-lapped and double-stitched seam. The double row of stitches shall be 3/16-inch gage, with the outer row 1/16 inch from finished edge.	301	LSc-2	10-14	00/3	000/3
		or 401	LSc-2	10-14	00/3	000/3
25.	Set shoulder straps.					
	Finished appearance. The shoulder straps shall be uniform in size and setting. The straps shall lie smooth and flat without twists or fullness.					
	a. Position the shoulder strap with the notch centered on shoulder seam and with the pointed end of the strap even with edge of gorge.					
	b. Seam shoulder strap to raincoat 1/16 inch from armhole edge. Trim shoulder strap even with armhole where necessary.	301	SSa-1	10-14	00/3	00/3

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seams or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
26.	**Join collar to raincoat.** **Finished appearance. The collar shall be carefully joined to the raincoat without distortion of the collar stand or collar. Collar ends and lapel steps shall be uniform in width.**					
	a. Position collar on outside of raincoat with lower edge of collar even with top edge of fronts, and with the lapel notch and lower notch and lower corners of collar matching.					
	b. Join collar to fronts at the gorge with a 1/4-inch seam, from lapel notch to approximately 1 inch to the back of the seam joining collar stand to collar leaf; continue stitching the under-**collar stand to fronts and back 1/4 inch from raw edges, with center notches matching and with size label and ends of coat hanger caught in the stitching.**	301	SSa-1	10-14	00/3	00/3
	c. Place raw edges of facings, fronts and collar even at gorge and stitch together with a 1/4-inch seam. Stitching shall extend from lapel notch to approximately 1 inch from top end of facing. Notch facing, collar, and fronts at end of stitching.	301	SSq-2 (a)	10-14	00/3	00/3
	d. Trim corner of lapels and bottom front corner of raincoat for proper turning. Turn facing, working out lapel and bottom corner. Topstitch facings through collar and fronts 1/16 inch from raised seam. Stitching shall extend from juncture point of collar and lapel to notch at the top back edge of facings.	301	SSq-2 (b)	10-14	00/3	00/3
	e. Turn under and lap the lower edge of topcollar stand on upper edge of facings at shoulders. Stitch topcollar stand to raincoat 1/16 inch from folded edge.	301	LSb-1	10-14	00/3	00/3

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:10Z
Check the source to verify that this is the currenversion before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
27.	Edgestitch raincoat. Finished appearance. The edgestitching shall be of uniform width without twisting, pleating, or puckering. The bottom hem shall be uniform in width without distortion.					
	a. Turn up the bottom edge of the raincoat and seam to the back and fronts with the raw edge turned under 3/8 inch and caught in the stitching along the back ends and the upper folded edge of the turnup. The left and right side back pleat seamed edges shall be towards the side seam. Stitch along the back edge of the facings from upper folded edge of bottom turnup to bottom edge of raincoat, with the facings lapped on the bottom turnup, and continue the stitching along bottom and front edges of raincoat and front and top edges of lapels to the juncture point of lapel and collar.	301	SSa-1 (back ends of bottom turnup) LSa-1 (back edge of facings) EFb-1 (upper folded edge of bottom turnup) SSe-2 (b) (bottom and front edges of coat front and top edges of lapels)	10-14	00/3	00/3
	b. The stitching shall be uniformly 1/16 inch from edges of bottom turnup and back edge of facings and 1/8 inch from bottom and front edges of raincoat and front and top edges of lapels. The bottom turnup shall finish 3/4 inch wide.					
28.	Set sleeves. Finished appearance. The sleeves shall be carefully set with properly distributed fullness, without twists, pleats, puckers or raw edges. The gage of stitching shall be uniform.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
28.	Set sleeves. (cont'd)					
	a. Position sleeve on outside of raincoat at the armhole face to face with notches matching. Join sleeves to armhole on the inside with a 1/4-inch seam, catching the end of shoulder straps and side seams in the stitching.	301	LSq-2 (a)	10-14	00/3	00/3
	b. Trim armhole seam allowance to produce an even width to facilitate the seam sealing operation. This may be done with a sewing machine with a knife attachment. The width of the trimmed seam allowance shall be sufficient to allow it to be caught in the topstitching and shall be narrow enough to preclude pleats, puckers and channels which cause hydrostatic failures.					
	c. Topstitch fronts and back at the armhole 3/16 inch from raised seam. The topstitching shall not be over the shoulder straps.	301	LSq-2	10-14	00/3	00/3
29.	Bartack hanging pockets.					
	Finished appearance. The facings shall not be distorted by the bartacks securing hanging pockets to facings. The pockets shall lie smooth and flat, with the front edge positioned between the facings and the fronts of the raincoat. The bartacks shall be on the line of stitching at the back edge of the facings and positioned at the top, center, and bottom of the pocket. The center bartack shall be through one ply of the hanging pocket only.					
	a. Secure hanging pockets to facings only with three vertical bartacks. The bartack shall be 3/8 to 1/2 inch long.	Bartack		28 per bartack	00/3	00/3
30.	Make buttonholes.					
	Finished appearance. The buttonholes shall be clean cut, well made and correctly positioned. The buttonholes shall be well worked over gimp to fit a 45-line button. The stitching shall be securely caught in the fabric with the purling on the outside of the left front and on the facing side of the lapels.					

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:10Z
Check the source to verify that this is the currentversion before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
30.	Make buttonholes. (cont'd) a. Mark the location for 3 buttonholes on the left front and the location for one buttonhole on each lapel, in accordance with buttonhole marker. b. Make a horizontal eyelet-end taper-bar type buttonhole, cut 1-1/4 inches long, at each mark on the left front and on each lapel. The inside edge of the eyelet end of the buttonhole shall be 3/4 inch from front edge of raincoat and lapels, with the center of the top buttonhole to be 1-1/2 ±1/8 inches from top edge of lapels.	Buttonhole		70 per buttonhole including bar	A/3	A/3
31.	Mark for buttons. a. Mark the location for sewing four 45-line sewing hole buttons to the left and right fronts in accordance with button marker. In the finished raincoat, the buttons on the right front shall properly engage buttonholes in the left front and left lapel, and shall be in horizontal alignment with buttons on left front. b. Mark location for sewing one 30-line sewing hole button to each shoulder to properly engage buttonholes in shoulder straps. The straps shall lie smooth and flat on the finished raincoat, without twisting or bulging. c. Mark the location for sewing one 30-line sewing hole button to the right front to properly engage buttonhole in left buttonhole tab.					
32.	Sew on buttons. Finished appearance. The buttons shall be securely sewn to the raincoat with stitching securely tacked. The collar ends shall not overlap nor be open more than 1 inch when left lapel is buttoned. The front of the coat shall not be distorted when buttoned.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD Needle	THREAD Bobbin or Looper
32.	Sew on buttons. (cont'd)					
	a. Sew one 45-line sewing hole button at each of the marks on the left and right fronts, securing each button with an 18-line sewing hole stay button on the facing side. All buttons shall be sewn through the fronts and facings. The second 45-line button from the bottom may or may not be sewn through the pocket. The bottom 45-line button shall be sewn through the pocket.	101 or 301		20-22 per button	30/4	
				14-16 per button	30/4	30/4
	b. Sew one 30-line sewing hole button at the mark on each shoulder.	101 or 301		20-22 per button	30/4	
				14-16 per button	30/4	30/4
	c. Sew one 30-line sewing hole button at the mark on the right front for the left facing buttonhole tab, securing the button with an 18-line sewing hole stay button on the facing side.	101 or 301		20-22 per button	30/4	
				14-16 per button	30/4	30/4
	d. Neck and shank wrap all buttons on the right front only.	Hand or Machine		8 wraps (double thread) or	30/4	
				32 stitches per shank	30/4	30/4
33.	Trim ends of stitching.					
	a. Trim all ends of stitching, and remove all loose ends of thread from the raincoat.					
34.	Prime and seal seams and stitchings.					
	a. Thoroughly clean and degrease surfaces to be primed. Wipe with an acetone soaked cloth (methyl isobutyl ketone or commercial paint solvents may be used instead of acetone). Apply the primer by brushing, dipping or spraying. Securely seal the side, shoulder, back armhole, and sleeve seams; the stitching at top and bottom ends of pocket opening; the triangle stitching at top end of pleat; the stitching for the eyelet reinforcement pieces; and the stitching for the shoulder strap buttons, as specified in 3.7.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:10Z
Check the source to verify that this is the current version before use.

TABLE II - MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
35.	**Clean raincoat.** a. Remove all spots and stains and shade markings. Remove any mica dust distributed over interior and exterior of raincoat, except in sealed areas specified in operation 34.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

3.7 Priming and sealing of seams and stitching. All side joining seams, shoulder seams, sleeve armhole joining seams, sleeve joining seams, back joining seams, the double row of stitching at top and bottom edge of the pocket welt, the triangle stitching at top end of back pleat facing, stitching at the reinforcement pieces, and shoulder strap button stitching shall be sealed on the inside with brush coats of seam sealant specified in 3.3.5 (seam sealant shall have no less solids content at time and point of application than specified in Table I). The sealant shall be brushed on, and well worked in, in such a manner as to completely wet and cover the stitching and needle holes, and worked under any turned or raw edges of the seams. The sealant shall be applied in such a manner as not to cause pleats, puckers, or twists on the seam or on the material in the adjacent area. The seams shall be dusted with powdered mica specified in 3.3.6. Care shall be exercised that only sealed seams are dusted and that dust is not distributed over other areas of the coat, either interior or exterior. The seams shall be sealed with a sufficient number of coats of seam sealant and dusted in such a manner that the finished raincoats meet the seam hydrostatic and blocking requirements specified in 3.9.

3.8 Repairs in coating on finished raincoats.

3.8.1 Repairable areas. Repairable areas generated during manufacture of the finished raincoat are defined as follows:

3.8.1.1 Scuff. Any break in the coated surface not exceeding 1/16 inch in width or 1-1/2 inches in length, other than a pick-off of the coating or a pinhole shall constitute a scuff.

3.8.1.2 Pinhole. A very small hole in the coating such as might be caused by puncturing the coating with a pin shall constitute a pinhole.

3.8.1.3 Needle holes. One or more holes left in the fabric after removal of sewing thread shall constitute needle holes.

3.8.1.4 Pick-off. Any area where the coating is removed from the coated base material by separation of the plies of material after adhesion of the surfaces together shall constitute a pick-off.

3.8.2 Repair compound. The repair compound shall be a brushable silicone rubber (see 3.3.5).

3.8.3 Repair procedure. The repair compound shall be worked into the breaks in the coating on the coated side of the fabric, and spread smoothly and evenly over the damaged area. The repaired area shall then be lightly dusted with the mica specified in 3.3.6.

3.8.4 Requirements for repaired areas. The repaired area shall show no compound strike through, stiffening, or other defects that would affect the serviceability or the outside appearance. The repaired area shall conform to blocking requirements specified in 3.7.1. The repair compound shall be well adhered to the coated fabric and when it is subjected to scrubbing action between the hands, shall show no lifting of the edge, and no cracking, flaking, or removal of the repair compound.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:10Z
Check the source to verify that this is the current version before use.

3.8.5 Location and number of repairs.

3.8.5.1 Scuff repairs. The scuffs in coating, not exceeding four in number, may be repaired as specified in 3.8.3, subject to the following limitations. The overall length of a repaired area shall not exceed 2 inches, and the overall width of the repaired area shall not exceed 1/2 inch.

3.8.5.2 Pinhole repairs. Pinholes in coating, not exceeding eight in number, may be repaired as specified in 3.8.3. Such pinhole repairs shall not exceed 1/2 inch in diameter.

3.8.5.3 Needle holes. Needle holes in the coating, not exceeding eight (single row 8 and double row 16), outside of the actual seam stitching may be repaired as specified in 3.8.3. Such needle hole repairs shall not exceed 1-1/2 inches in length and 1/2 inch in width.

3.8.5.4 Pick-off repairs. Pick-offs in the coating, not exceeding four in number, may be repaired as specified in 3.8.3, provided the overall dimension of such repairs does not exceed 1/2 inch.

3.9 Performance of sealed seams on finished raincoat.

3.9.1 Blocking. When tested as specified in Section 4, Table V, blocking scale rating shall be not greater than No. 3 (see method 5872 of FED-STD-191).

3.9.2 Hydrostatic resistance. When tested as specified in Section 4, Table V, hydrostatic resistance of the seams shall show no leakage (see 4.3.2.2 for definition of "leakage").

3.10 Finished measurements. The finished raincoat shall conform to the measurements shown in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:10Z
Check the source to verify that this is the current version before use.

Table III Raincoat measurements 1/

Size	1/2 Breast 2/	Regular Back length 3/	Sleeve length 4/
	inches	inches	inches
34	18-3/4	46-3/4	17-1/2
36	19-3/4	47	17-1/2
38	20-3/4	47-1/4	17-1/2
40	21-3/4	47-1/2	17-1/2
42	22-3/4	47-3/4	17-1/2
44	23-3/4	48	17-1/2
46	24-3/4	48-1/4	17-1/2
48	25-3/4	48-1/2	17-1/2

Size	1/2 Breast 2/	Long Back length 3/	Sleeve length 4/
	inches	inches	inches
34	18-3/4	49	18-1/2
36	19-3/4	49-1/4	18-1/2
38	20-3/4	49-1/2	18-1/2
40	21-3/4	49-3/4	18-1/2
42	22-3/4	50	18-1/2
44	23-3/4	50-1/4	18-1/2
46	24-3/4	50-1/2	18-1/2
48	25-3/4	50-3/4	18-1/2

	Exra Long		
	inches	inches	inches
36	19-3/4	51-3/4	20
38	20-3/4	52	20
40	21-3/4	52-1/4	20
42	22-3/4	52-1/2	20
44	23-3/4	52-3/4	20

1/ Tolerances: 1/2 breast measurement ±3/4 inch; back length measurement ±1 inch; sleeve length measurement ±1/2 inch.

2/ One-half breast measurement taken with raincoat buttoned from folded edge to folded edge 1 inch below pit of armhole.

3/ Back length measurement taken along center back seam from lower edge of undercollar to bottom edge of raincoat.

4/ Sleeve length measurement taken along underarm seam from pit of armhole to bottom end of sleeve.

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:10Z
Check the source to verify that this is the current version before use.

3.11 Workmanship. The finished raincoats shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.2.1 First article inspection. When first article is required, inspection shall be made of a completely fabricated raincoat for conformance to all provisions of this specification.

4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition to testing provisions contained in subsidiary specifications, figures and standards, testing shall be performed on components listed in Table IV for characteristics noted. All test reports shall contain the individual values utilized in expressing the final results.

4.2.2.1 Sampling for testing. Government furnished material shall not be sampled or tested unless specifically requested by the Government. The inspection level for characteristics in Table IV shall be S-1 of MIL-STD-105. The AQL for each characteristic wherein the requirement is applicable to the sample unit shall be 6.5 defects per 100 units (DHU). For all other characteristics wherein the requirements are based on the sample average or where samples are composited for test purposes, there shall be no evidence of failure of any characteristic to meet the requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

Table IV Test methods

Component	Characteristic	Rqmt. para.	Test method	Sample unit	No. determinations per sample unit	Results reported as: Pass or fail	Results reported as: To nearest
Seam sealant	Hydrostatic resistance						
	- initial	Table I	4.3.1.2	1 pint composite and 1 yd. of coated fabric and prepared seam	5	X	
	- after resistance to low temperature	Table I	4.3.1.3		3	X	
	Blocking	Table I	4.3.1.4		3	X	
	Solids content	Table I	4.3.1.5		2		0.5%
	Composition 1/	3.3.5					
Seam dusting material	Material identification	3.3.6	Standard commercial	1 oz.	5	X	
Eyelets	Material identification	3.3.10	Standard commercial	10		X	

1/ Certificate of compliance

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:10Z
Check the source to verify that this is the current version before use.

4.2.2.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.2.3 Examination of end item. The end item shall be examined for defects listed in 4.2.3.1 and 4.2.3.2. The sample unit shall be one raincoat. All defects shall be classified as indicated below except those with an asterisk (*) in classification column which shall be classified as:

Major defect - When seriously affecting appearance or serviceability.
Minor A defect - When affecting appearance or serviceability, but not seriously.

4.2.3.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major (*)	Minor A	Minor B
Back	a. Triangle stitching at top edge of pleat omitted.	X		
	b. Lengths uneven by 1/4 inch.		X	
	c. Point of facing off center of pleat by more than 1/4 inch.			X
Bartacks	a. Missing, insecure, or misplaced not serving intended purpose:			
	- one bartack.			X
	- 2 bartacks.		X	
	- 3 or more bartacks.	X		
Buttonholes	a. Construction:			
	1. Any omitted or added.	X		
	2. Stitches not securely caught on fabric or pulling away from fabric.	X		
	3. Not corresponding with size of buttons so that they do not button properly.	X		
	4. One or more broken stitches:			
	- in one buttonhole.			X
	- in two buttonholes.		X	
	- in three buttonholes.	X		
	5. More than 2 skipped stitches in 1 buttonhole.			X

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:10Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	6. More than 2 skipped stitches in 2 or more buttonholes.		X	
	7. Wrong type or uncut buttonhole.			X
	8. Gimp omitted:			
	- in 1 buttonhole.			X
	- in 2 or more buttonholes.		X	
	- ends of gimp not properly trimmed.			X
	- ends of gimp not caught in tack at end of buttonhole.			X
	9. End of buttonhole not securely tacked.		X	
	10. Ragged edges.			X
	11. Poorly made, affecting appearance (unless otherwise classified).		X	
	b. Front buttonholes:			
	1. Positioned more than 1/2 inch from pattern marks.		X	
	2. More than 3/8 inch from equal spacing.		X	
	3. Position from front edge:			
	- less than 5/8 inch but not less than 1/2 inch, or more than 7/8 inch but not more than 1 inch.			X
	- less than 1/2 inch or more than 1 inch.		X	
	4. Unevenly spaced from edge by more than 1/8 inch.		X	
	5. Finished with purling on facing side.		X	
	c. Lapel buttonhole:			
	1. Positioned more than 1/2 inch out of alignment with top edge of lapel.			X
	2. Position from edge:			
	- less than 5/8 inch but not less than 1/2 inch, or more than 7/8 inch but not more than 1 inch.			X
	- less than 1/2 inch or more than 1 inch.		X	
	3. Finished with purling on front instead of facing.		X	

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:10Z
Check the source to verify that this is the currentversion before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	d. Shoulder strap buttonhole:			
	1. Off center of strap by more than 1/8 inch.			X
	2. Placed from pointed end:			
	- less than 5/8 inch but not less than 3/8 inch or more than 7/8 inch.			X
	- less than 3/8 inch.		X	
	e. Facing tab buttonhole:			
	1. Off center of tab by 3/16 inch or more.		X	
	2. Positioned from pointed end:			
	- less than 5/8 inch but not less than 3/8 inch or more than 7/8 inch.			X
	- less than 3/8 inch.		X	
Buttons (applying to all buttons)	a. General:			
	1. Missing, loose, or broken (except stay buttons) one button.		X	
	2. Two or more missing, loose, or broken (except stay buttons).	X		
	3. One stay button missing or broken.			X
	4. Two or more stay buttons missing or broken.		X	
	5. Stitches on one or more front buttons not caught through front, facing and stay button.		X	
	6. Not specified type, size or color.		X	
	7. Wrap shank omitted or loose (applicable to buttons on right front only).			
	- on one button.			X
	- on two or more buttons.		X	
	8. Stitches of one or more stay buttons not caught through front facing.		X	
	b. Alignment:			
	1. Front buttons and buttonholes not aligned, causing a noticeable bulge or twist when buttoned.		X	

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:10Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	2. Front tab button and buttonhole not aligned, causing a noticeable bulge or twist when buttoned.		X	
	3. Buttons on left front not aligned with buttons on right front when buttoned:			
	- by 1/2 inch or more but not more than 3/4 inch.		X	
	- more than 3/4 inch.	X		
	4. Lapel button not aligned with buttonhole, causing a noticeable bulge or twist on fronts when buttoned.		X	
	5. Lapel button misplaced, causing collar ends to overlap or be more than 1 inch apart.		X	
	c. Position:			
	1. Front buttons position more than 3/8 inch from location indicated on pattern.			X
	2. Out of vertical alignment by more than 1/4 inch.			X
Cleanness	a. Any spot or stain of a permanent nature on any portion of garment which would be visible when raincoat is worn.	X		
	b. Any spot or stain of a permanent nature not visible when raincoat is worn.		X	
	c. Removable spot or stain visible on outside of raincoat.		X	
	d. Any removable spot or stain on inside of raincoat.			X
	e. Thread ends not trimmed throughout garment.			X
	f. Excessive mica distributed over interior areas of raincoat other than sealed seams.		X	
	g. Excessive mica distributed over exterior areas of raincoat.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
Collar	a. Collar tight at joining to neck seam, causing puckers or pleats on fronts, back or facing.		*		
	b. Topcollar badly twisted.		*		
	c. Topcollar tight, causing edges of collar to curl, affecting appearance.			X	
	d. Excessive fullness or puckers on topcollar, affecting appearance.			X	
	e. Collar edge irregular, affecting appearance.			X	
	f. Collar edge not properly forced out.				X
	g. Topcollar stand very tight or short, causing excessive fullness on undercollar, affecting appearance.				X
	h. Pointed ends poorly shaped or not of uniform shape, affecting appearance.				X
	i. Left and right pointed ends vary in length by: - more than 1/4 inch but not more than 1/2 inch. - more than 1/2 inch.	X		X	
Component and assembly	a. Any defective component.		*		
	b. Any component part omitted.	X			
	c. Any required operation omitted or improperly performed.		*		
Eyelet	a. Missing, defective or not securely clinched, or not clinched through reinforcement pieces: - 1 or 2 eyelets. - 3 or more eyelets.			X	X
	b. Rough or sharp edges on one or more eyelets			X	
	c. Reinforcement piece omitted.			X	

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
	d. Reinforcement piece not fully stitched to front.			X	
	e. Positioned more than 1 inch from pattern marks.				X
Facings	a. General:				
	1. Excessive fullness on front facing.				X
	2. Top end not completely caught in collar seam.			X	
	b. Facing tab:				
	1. Omitted or stitched to right facing.	X			
	2. Pointed end facing toward back of facing.	X			
	3. Not securely stitched to left facing.	X			
	4. Stitched to left facing on an angle, not permitting tab to lie in a horizontal position without a bulge or twist.				X
	5. Pointed end exposed beyond front edge of left front.			X	
	6. Positioned more than 1/2 inch from pattern marks.			X	
Fronts	a. Front edge irregular, affecting appearance.				X
	b. Excessive fullness or twists on fronts.		*		
	c. Uneven at neck when buttoned by:				
	- 1/4 inch but not more than 3/8 inch.				X
	- more than 3/8 inch.			X	
	d. Left front shorter than right front at bottom when buttoned by:				
	- more than 1/4 inch but not more than 1/2 inch.			X	
	- more than 1/2 inch.	X			
	e. Left front 1/2 inch or more longer than right fronts at bottom.			X	
	f. Bottom corner of right front exposed beyond bottom edge by more than 1/4 inch when buttoned.				X

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Hems	a. General:			
	1. Any hem twisted on inside of raincoat, affecting appearance.			X
	2. Outside of raincoat puckered or pleated by hem, affecting appearance.		X	
	b. Width: - sleeve hem or bottom hem less than 5/8 inch or more than 7/8 inch.			X
Hanger	a. Omitted, or ends not securely stitched.		X	
Labels	a. Size label:			
	1. Missing, incorrect, or illegible.		X	
	2. Not securely caught in stitching.		X	
	b. Contractor's and instruction label:			
	1. Missing, incorrect, or illegible.		X	
	2. Placed at position other than on left hanging pocket.			X
	3. Not stitched on four sides.			X
Lapels	a. Lapel facing badly twisted.	*		
	b. Lapel facing tight or short, causing lapels to curl affecting appearance.		X	
	c. Lapel edge irregular, affecting appearance.		X	
	d. Lapel edge not properly forced out, affecting appearance.			X
	e. Excessive fullness on lapel, affecting appearance.	*		

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:10Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	f. Left and right sides varying in length by:			
	- more than 1/4 inch but not more than 1/2 inch.		X	
	- more than 1/2 inch.	X		
	g. Pointed ends poorly shaped or not of uniform shape, affecting appearance.		X	
Material defects and workmanship damages	a. Any hole in basic fabric.	X		
	b. Any weakening defect such as smash, multiple float or loose slub in basic fabric.	X		
	c. Any scissor or knife cut, tear, unauthorized mend or burn.	X		
	d. One or more unauthorized drill holes.	X		
	e. Flaky, tacky, thin spots in the coating.	X		
	f. Crease or wrinkle:			
	1. Resulting from doubling of surfaces that can not be corrected by manual pressure.	X		
	2. Which, although not doubled or adhered to as described in f.1 above, nevertheless affects appearance.	X		

NOTE: Raincoats drawn for this examination shall have been production folded and packed for a minimum of 1 hour.

	g. Any pick-off of coating.	X		
	h. Uneven or lumpy coating or foreign matter in the coating.			X
	i. Any blisters.	X		
	j. Shade bars, streaks, unsightly slubs, etc., on the outside, affecting appearance.	X		
	k. Needle chews.	X		
	l. Creases in shoulder.		X	
	m. Scuffs uncoated.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:10Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	n. Pinholes uncoated.	X		
	o. Needle holes uncoated.	X		
	p. Any unauthorized recoating.			
	1. Over 4 scuffs repaired.		X	
	2. Scuff repair area:			
	- over 2 inches in length.		X	
	- over 3/4 inch in width.		X	
	3. Over 8 pinholes repaired.		X	
	4. Pinhole repair area over 1/2 inch in diameter.		X	
	5. Over 8 stitching holes (either single row 8 or double row 16) repaired.		X	
	6. Stitching hole repair area:			
	- over 1-1/2 inches in length.		X	
	- over 1/2 inch in width.		X	
	7. Over 4 pick-offs repaired.		X	
	8. Any pick-off repair area more than 1/2 inch.		X	
	q. Repair compound on fabric, cracks, lifts, or flakes when flexed or scrubbed.	X		

NOTE: Material defects and workmanship damages relative to holes in the coating of the basic fabric shall be determined by visual examination using through lighting on the finished raincoat. The through lighting equipment shall conform to the following requirements:

> A table with a clear glass top lighted with a minimum of 2 parallel 25-watt fluorescent bulbs spaced 5 to 6 inches apart (distance between bulbs). The top of the glass shall be 9 to 10 inches above the top of the bulbs. The inside of the light housing shall be painted a flat white. The housing sides and ends shall be from 6 to 8 inches from the bulbs. The table shall be used in a darkened area. The raincoats shall be examined with the uncoated side of the fabric toward the light.

To determine whether an uncoated needle hole or pinhole exists, a dab of water on the tip of finger shall be applied to the questionable area. A defect shall be scored as classified only if water penetrates the other side of material.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
Pockets	a. Position, alignment and construction of pockets:				
	1. Placed 1 inch or more from pattern marks.			X	
	2. Out of alignement by:				
	- more than 1/2 inch but not more than 1 inch.			X	
	- more than 1 inch.	X			
	3. Welt poorly shaped or not of uniform shape or size, affecting appearance.			X	
	4. Welt not completely covering notched ends on inside by more than 1/4 inch.			X	
	5. Excessive tightness or fullness at openings affecting appearance.			X	
	6. Notch exposed beyond outside ends of welts.	X			
	7. Back edge of hanging pocket short between stitching on ends of welts, causing fullness on fronts, affecting appearance.			X	
	b. Hanging pockets:				
	1. Too full between back edge and front facing, affecting appearance.				X
	2. Twisted or too full between bartacks at front facings or between stitchings on ends of welt, not permitting pocket to lie smoothly.				X
	3. 1/4 inch or more of welt box stitching not caught through pocket.			X	
	4. Top of pocket more than 1 inch above top row of pocket welt stitching.				X
Seams and stitchings	a. General:				
	1. Seams badly twisted, pleated or puckered (not specifically classified).		*		

NOTE: Characteristic of coated fabric is to show a certain amount of puckering at seams and stitching. This normal puckering is not to be classified as a defect.

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:10Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
	2. Part of garment caught in any unrelated operation or stitching.		*		
	3. End of stitching not caught in other seams or stitching not securely backstitched.			X	
	4. Wrong shade of thread, markedly in contrast with color and shade of garment:				
	- on outside.		*		
	- on inside.				X
	b. Gage of stitching for edge, raised, or double needle stitching:				
	1. Irregular, i.e., unevenly gaged or stitching not uniform.			X	
	2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.				X
	3. Less than 1/16 inch from edge, resulting in damage to material.	X			
	c. Open seams:				
	1. Seams joining collar or welts to garment, or at collar, lapel, or front edge:				
	- open 1/8 inch but not more than 1/4 inch.				X
	- open more than 1/4 inch.			X	
	2. Any other seam:				
	- open to any extent which permits ingress of water.	X			
	- open 1/8 to 1/2 inch but not resulting in above condition.				X
	- open over 1/2 inch.			X	

NOTE: One or more broken or 2 or more continuous skipped or run-off stitches constitute an open seam. On double-stitched seams, a seam is considered open when one or both sides of the seam is open.

	d. Raw edges:				
	1. On outside (on collar lapel, front or pocket welt edges):				
	- 1/8 inch to 3/8 inch.			X	
	- over 3/8 inch.	X			

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	2. On outside (on any other seam):			
	- 1/8 inch to 3/8 inch.			X
	- over 3/8 inch.		X	

NOTE: Raw edges not securely caught in stitching shall be classified as an open seam.

e. Run-offs:				
	1. On joining seams:			
	- when resulting in an open seam use "Open Seam" classification.			
	2. On top, edge or raised stitching (when not resulting in an open seam):			
	a. Outside:			
	- over 1/4 inch up to 1/2 inch.			X
	- over 1/2 inch.		X	
f. Seam and stitch types:				
	1. Wrong seam type.		X	
	2. Wrong stitch type.		X	
	3. Looper thread on outside of garment (when 401 stitch type is used).	X		
g. Stitch tension:				
	1. Loose tension 2 inches or more in one area of edge or raised stitching, or on hem of front facings, hanging pockets or hand openings, resulting in loosely exposed bobbin thread or top thread.		X	
	2. Loose tension over 2 inches in other area.	X		
	3. Tight tension (stitches break when normal strain is applied to the seam or stitching).	X		
	4. Unbalanced tension, one thread tighter than the other.	X		
h. Stitches per inch (except labels, tab, and hanger). To be scored only when the condition exists on major portion of seam or stitching.				

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	1. Stitches less than minimum specified:			
	- 1 stitch per inch.			X
	- 2 stitches per inch.		X	
	- 3 or more stitches per inch.	X		
	2. Stitches over the maximum specified:			
	- 1 stitch per inch.		X	
	- 2 stitches per inch.	X		
	i. Labels, tab, and hanger:			
	- 3 stitches per inch less.			X
	- average 3 stitches per inch less.		X	
	j. Stitches skipped or broken (on edge or raised stitching when seam is seamed, turned and stitched and on stitching forming hem on back edge of front facings, hanging pockets or hand openings).			
	1. More than 1/2 inch at one place, or 1/2 inch or less at two or more places.			X
Sealing of seams and stitching	a. Any seam or stitching or needle hole required to be sealed, not properly sealed; i.e., sealant not under the turned edge of seam or does not completely cover the seam stitching or any needle hole.	X		

NOTE: Defects listed in paragraph a above shall be determined by visual examination using the through light equipment listed on page 39 for determining material and workmanship damages.

	b. Sealant not dusted (to be scored only when the condition exists on major portion of seam).		X	
	c. Sealant not flexible, i.e., cracks or flakes when creased.	X		
	d. Sealant tacky.	X		
	e. Seam badly twisted, pleated or puckered when the condition is caused by improperly performed seam sealing operation.			

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
	1. When seam is smoothed out and sealant is broken 1/.	X			
	2. When seam is smoothed out and sealant is not broken but condition remains one which seriously affects appearance or serviceability 1/.	X			
	3. When seam is smoothed out and sealant is not broken but the condition remains one which affects appearance or service-ability but not seriously 1/.			X	
Direction of lap of seams	a. Fronts lapped on back at shoulder.				X
	b. Back lapped on front at side seam.				X
	c. Right back lapped on left back at center back seam.				X
	d. Undersleeve lapped on top sleeve.				X
	e. Sleeve lapped on front or back at armhole seam.			X	
Shaded parts	a. Any outside part shaded.		*		
	b. Inside hanging pockets not matching each other.				X
Shoulder straps	a. Position and construction.				
	1. Center of strap:				
	- more than 1/4 inch but not more than 3/8 inch from shoulder seam.				X
	- more than 3/8 inch from shoulder seam.			X	
	2. Pointed end forward or back of shoulder seam by:				
	- more than 1/4 inch but not more than 3/8 inch.				X
	- more than 3/8 inch.			X	
	3. Uneven in length more than 3/8 inch.				X

1/ When this condition occurs at the base of the armhole in the area directly above the eyelet reinforcement piece, the defect will be scored one degree less in severity, i.e., Minor A instead of Major; Minor B instead of Minor A.

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:10Z
Check the source to verify that this is the currentversion before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	4. Straps misplaced, i.e., one strap further forward or backward from position of other strap, affecting appearance.		X	
	5. Misplaced so that strap will not lie flat when buttoned.		X	
	6. Poorly shaped,affecting appearance.			X
	7. Upperside of strap excessively full or twisted,affecting appearance.			X
	8. Row of stitching around armholes over shoulder strap when shoulder strap is buttoned in position.			X
	b. Button and buttonhole: - button not aligned with buttonhole, causing a noticeable bulge or twist on strap or puckering across shoulders when buttoned, affecting appearance.		X	
Sleeves	a. Setting and hang:			
	1. Sleeve fullness at armholes misplaced, affecting appearance.		X	
	2. Sleeves tight at armhole, causing puckers or pleats on fronts or back, affecting appearance.		X	

4.2.3.2 Finished measurements. Any measurement deviating from the finished measurements specified in Table III shall be classified as a size measurement defect. Sleeve length uneven by 1/2 inch or more shall be classified as a size measurement defect.

4.2.3.3 Inspection levels and AQL's. Inspection levels and AQL's expressed in DHU shall be as follows:

4.2.3.1

Inspection Level III of MIL-STD-105

AQL's	Major	1.5 DHU
	Major and Minor A (combined)	10.0 DHU
	Minor B (combined)	40.0 DHU

4.2.3.2

Inspection Level S-3 of MIL-STD-105

One class	6.5 DHU

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:10Z
Check the source to verify that this is the current version before use.

4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lot shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content (exterior and interior)	Number of intermediate packages is more or less than required.

4.3 Test methods. All tests, except as otherwise specified, shall be performed at prevailing conditions of temperature and relative humidity.

4.3.1 Testing of seam sealant.

4.3.1.1 Preparation of specimens. The supplier shall prepare a 2-yard sample seam by joining two 5-inch-wide pieces of the coated fabric with seam type LSc-2 of FED-STD-751, stitch type 301 or 401 of FED-STD-751, 10 to 14 stitches per inch, thread size 00/3 needle and 000/3 bobbin and sealing by the method specified in 3.7.

4.3.1.2 Hydrostatic resistance (initial). The hydrostatic resistance of the seam sealant shall be tested by using test specimens prepared as specified in 4.3.1.1. Method 5514 of FED-STD-191 shall be used with the following exceptions:

(a) The test specimen shall be clamped in the test apparatus with the sealed seam in the center of the 4-1/2-inch test area with the uncoated side of the fabric in contact with the water.

(b) The hydrostatic head shall be raised to 25 centimeters and held at that pressure for 3 minutes.

(c) Leakage shall be defined as the appearance of water at three different places in any portion of the 4-1/2 inch diameter test areas.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

4.3.1.3 Hydrostatic resistance (after resistance to low temperature). The hydrostatic resistance of the seam sealant, after exposure to low temperature shall be tested in accordance with method 5874 of FED-STD-191 with the following exceptions. Leakage shall be determined as specified in 4.3.1.2(c).

(a) Test specimens shall measure 6 by 8 inches with the seam in the center running the full 8-inch length.

(b) The seam shall be folded over on itself once to a size of 6 by 4 inches with the coated side of the fabric in the center of the folded specimen.

(c) The roller weight shall be run along the fold line.

(d) Test specimens shall be exposed to a temperature of 0 $\pm 5^{\circ}$F for not less than 4 hours prior to test.

4.3.1.4 Blocking resistance. The resistance to blocking of the seam sealant shall be tested using test specimens prepared as specified in 4.3.1.1. Method 5872 of FED-STD-191 shall be used with the following exceptions:

(a) Test specimens shall measure 6 by 8 inches with the seam in the center running the full 8-inch length.

(b) The seam shall be folded over on itself once to a size of 6 by 4 inches with the coated size of the fabric in the center of the folded specimen.

(c) The test temperature shall be 160 $\pm 1.6^{\circ}$F.

(d) A 1-pound weight shall be distributed evenly along the seam.

4.3.1.5 Solids content. The solids content of the seam sealant shall be determined by using method 4021 of FED-STD-175.

4.3.2 Testing of the end item. The end item shall be tested as specified in Table V. All requirements shall be applicable to the individual sample unit. The inspection level shall be S-2 of MIL-STD-105. The AQL for each characteristic shall be 1.5 DHU. All tests on the end item are nondestructive.

Table V-End item testing

Characteristic	Rqmt. para.	Test method	No. determinations per sample unit	Sample unit	Results reported as:
Blocking	3.9.1		3	1 raincoat	Pass or fail
Hydrostatic resistance	3.9.2		10	1 raincoat	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

MIL-R-28975(MC)

4.3.2.1 Blocking resistance (end item). The blocking resistance of the finished raincoat shall be determined by method 5872 of FED-STD-191 with the following exceptions:

(a) The test specimen shall be a finished raincoat and shall be prepared by folding the raincoat so that two sealed seam surfaces are superimposed and in the center of the glass plates.

(b) The test temperature shall be 160 $\pm$1.6°F.

(c) A 1-pound weight shall be distributed evenly along the seam.

4.3.2.2 Hydrostatic resistance (end item). The hydrostatic resistance test shall **be run on the finished raincoat and shall be determined as specified in 4.3.1.2 except that the preparation of the test specimen as outlined in 4.3.1.1 shall not apply. The test shall be run at 10 different locations as follows:**

Right armhole seam (front)	**1**
Right armhole seam (back)	**1**
Left armhole seam (front)	**1**
Left armhole seam (back)	**1**
Right side seam	**2**
Left side seam	**2**
Center back seam	**2**

No more than two areas of the ten tests on each raincoat shall show leakage in **less than 3 minutes and any raincoat will be considered a failure if any area shows leakage below 25 centimeters head.** Leakage shall be defined as the appearance of water at three different places in any portion of the 4-1/2-inch diameter test area.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. The inside length of each raincoat shall be lined with a sheet of tissue paper conforming to type I, class 1 or 2 of UU-P-553, to prevent blocking. Each raincoat shall then be buttoned and folded to approximately 14-1/2 by 11-1/2 inches, and placed in individual polyethylene bags measuring approximately 18 by 15 inches wide with a 1-inch lip along the open 15-inch dimension. Each bag shall contain a label (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:10Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. The raincoats shall be packaged in accordance with industry's practice.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Twenty-five (25) raincoats of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to class weather-resistant, grade V2s, size 3A of MIL-B-17757 and assembled, closed and reinforced as specified in the appendix to the box specification. Toward the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.1.2 Method 2. When specified (see 6.2), three level B shipping containers (75 raincoats of one size only) shall be overpacked in a fiberboard shipping container conforming to class weather-resistant, size 4 of MIL-B-17757 and assembled, closed, and reinforced as specified in the appendix to the box specification. Toward the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Twenty-five (25) raincoats of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to domestic class, size 3A of MIL-B-17757, and assembled and closed as specified in the appendix to the box specification. The fiberboard used in fabrication of the box shall be grade 275. Toward the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Raincoats, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be inserted within each polyethylene bag in order to permit ready identification:

Nomenclature

Size_____ Stock number_____

Contract number

Name of contractor

5.3.1 Mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side directly under the printing or stenciling a white paper label with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The raincoat described herein is intended to be worn by male personnel of the Marine Corps ceremonial troops.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

6.2.1 Procurement requirements.

(a) Title, number, and date of this specification.
(b) Size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of raincoats in first article (see 3.2).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) When level A, method 2, packing is required (see 5.2.1.2).

6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

6.3 Samples and shade samples. For information regarding the availability of sample raincoat, and of standard shade specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. Examination, test and approval shall be as specified by the contracting officer (see 3.2).

Preparing activity:
Navy - MC
Project No. 8405-N483

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:10Z
Check the source to verify that this is the current version before use.

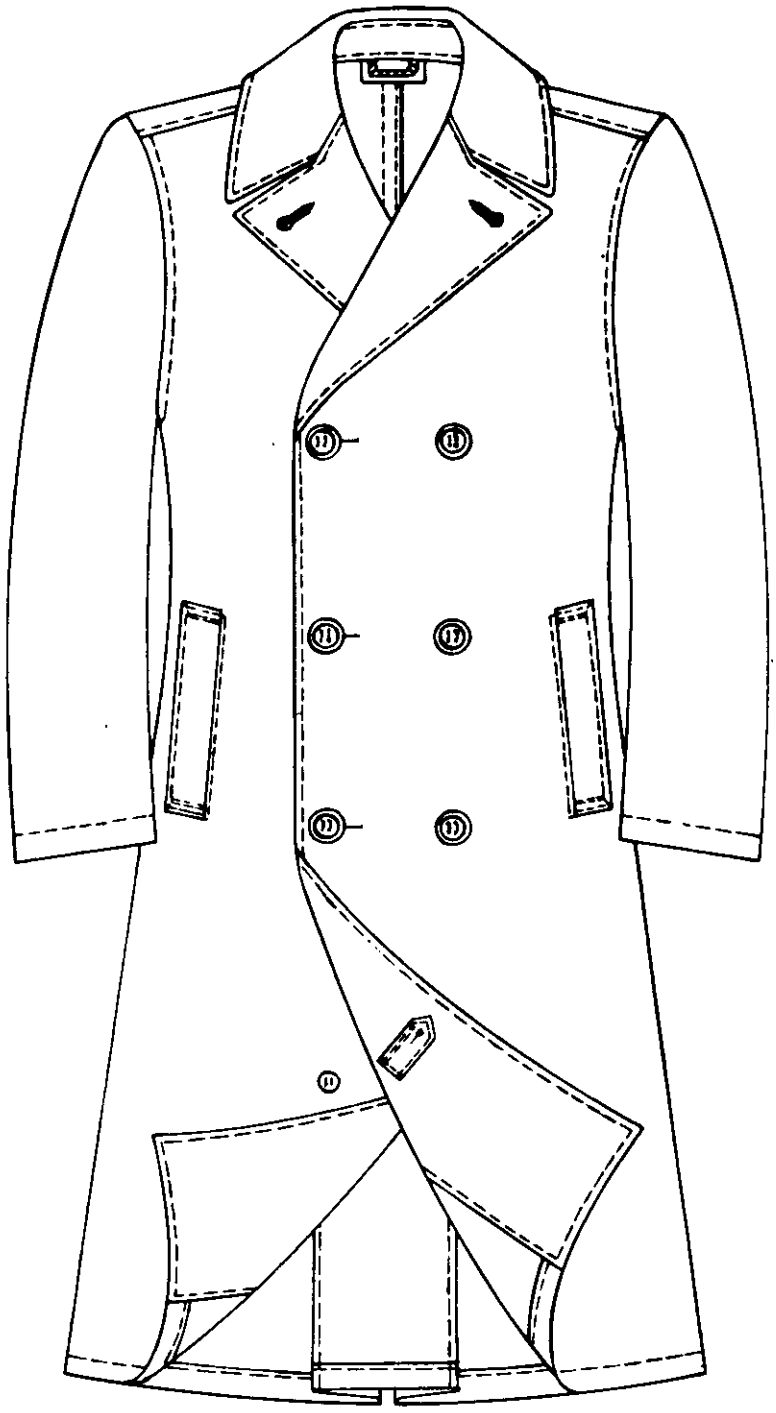


FIG.1. RAINCOAT, MAN'S: LIGHTWEIGHT, POLYURETHANE COATED

M.C.S.A.
826:R.G.F.
4 Nov '71

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

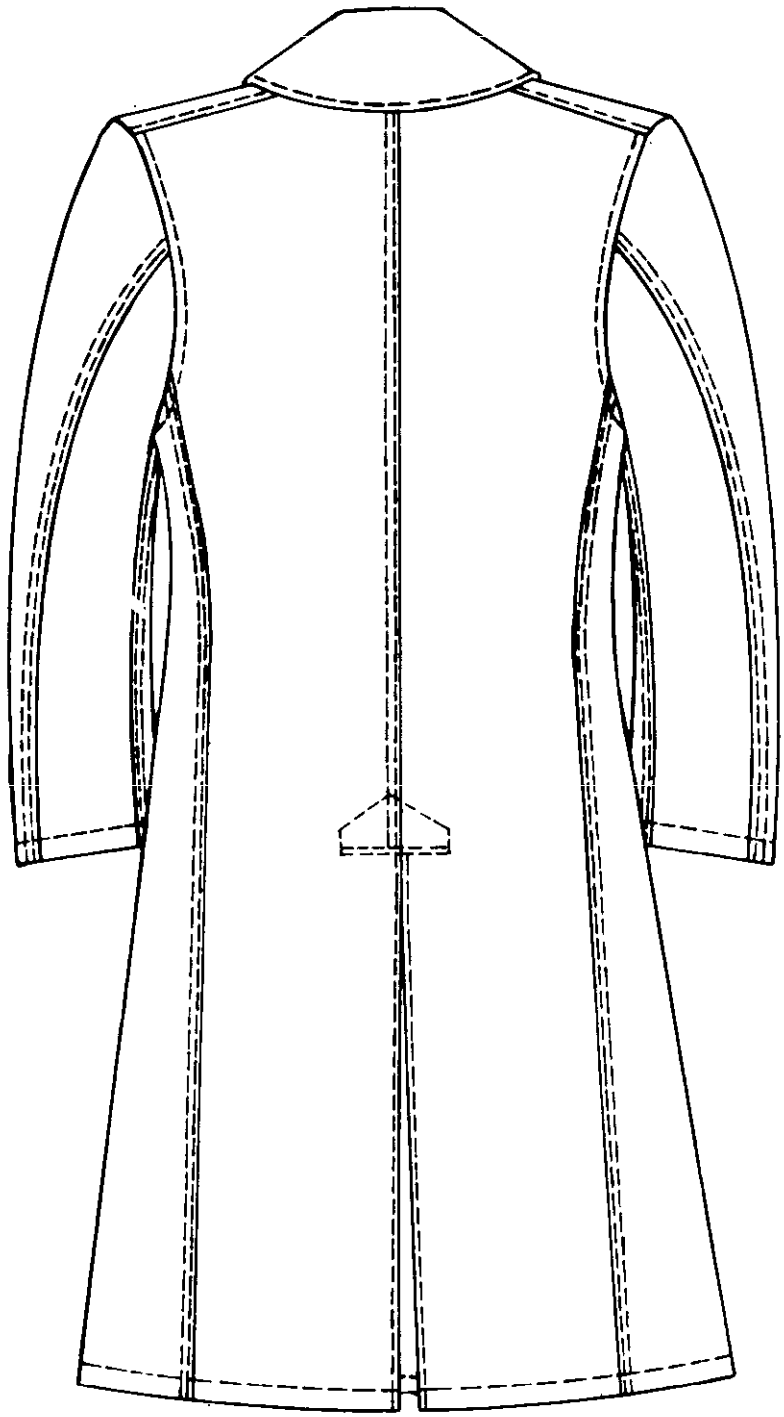


FIG. 2. RAINCOAT, MAN'S: LIGHTWEIGHT; POLYURETHANE COATED

M.C.S.A.
826: R.G.F.
4 Nov 71

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:10Z
Check the source to verify that this is the current version before use.

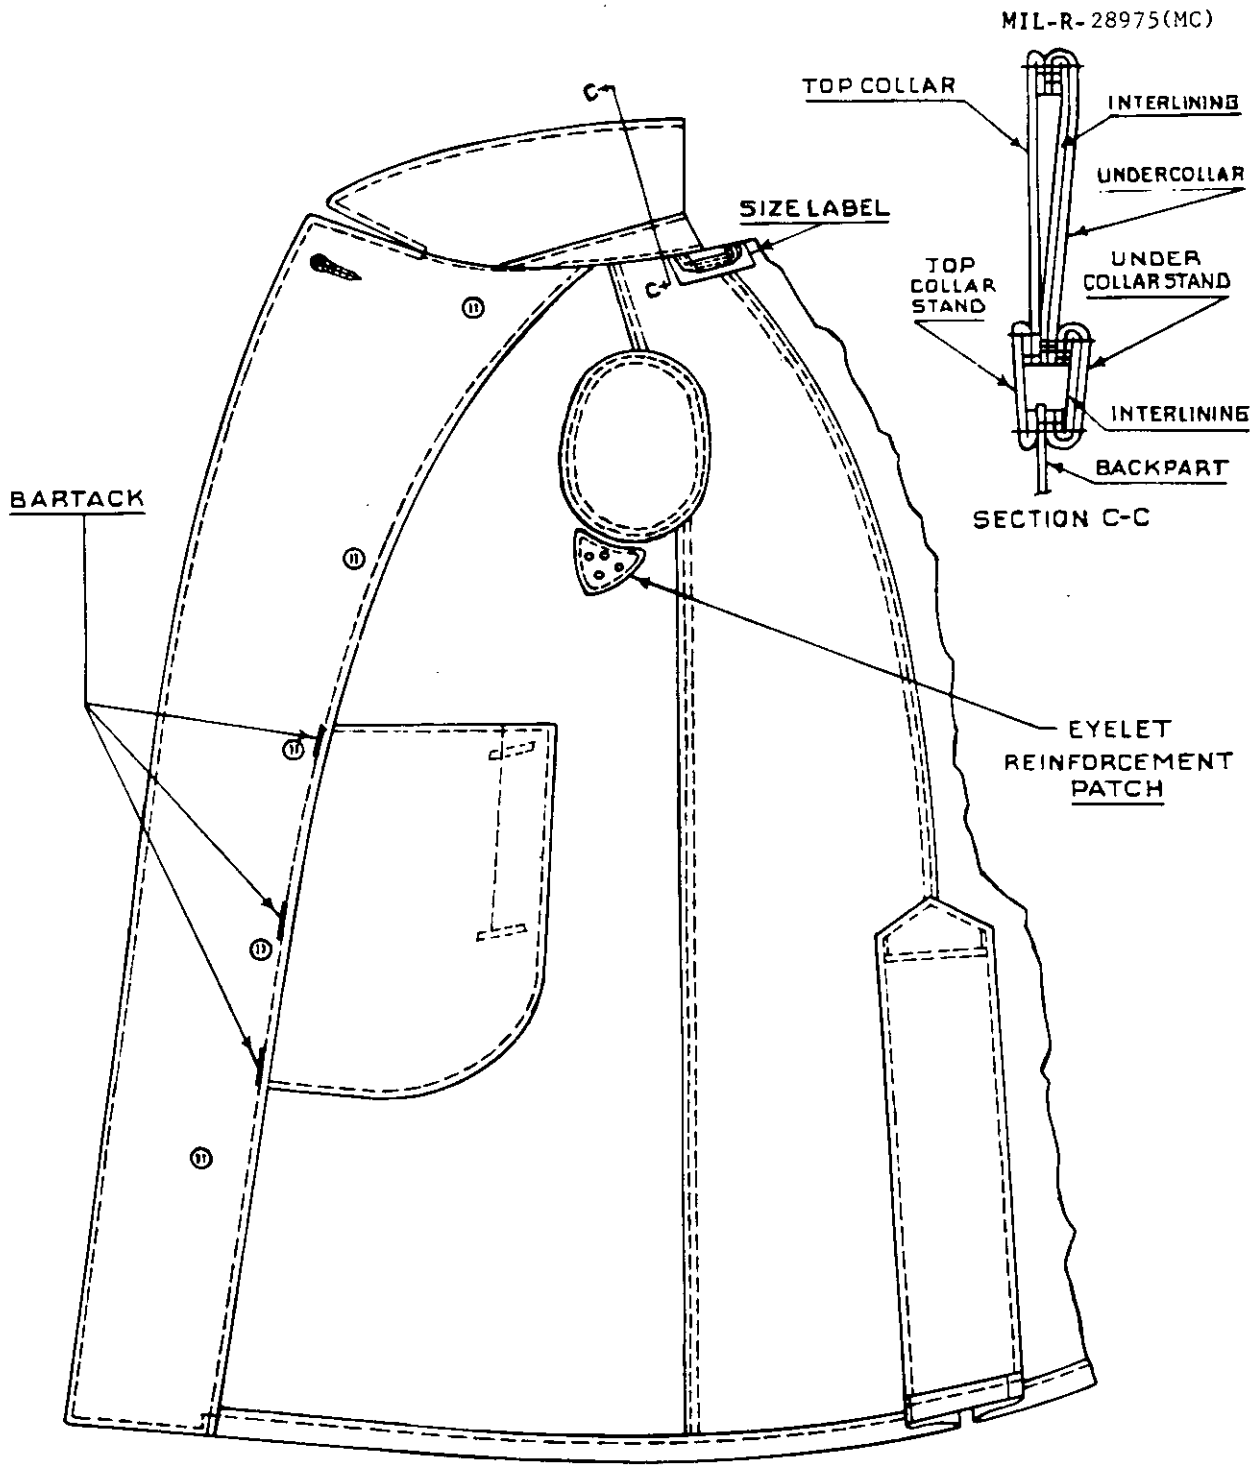


FIG. 3. RAINCOAT, MAN'S: LIGHTWEIGHT, POLYURETHANE COATED

M.C.S.A.
826:R.G.F.
4 Nov '71

Source: https://assist.dla.mil -- Downloaded: 20261O-20T21:10Z
Check the source to verify that this is the current version before use.

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General (826)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:10Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:10Z
Check the source to verify that this is the current version before use.