MIL-G-20587E

16 January 1973
SUPERSEDING
MIL-G-20587D
16 November 1967

MILITARY SPECIFICATION

GLOVES, WIRE MESH, ENTIRE HAND

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers protective wire mesh gloves which cover the entire hand.

1.2 Classification. The wire mesh glove covered by this specification shall be of the following sizes and hands as specified (see 6.2):

Size - Small
Size - Medium
Size - Large
Right hand
Left hand

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-276	-	Thread, Cotton
QQ-W-321	-	Wire, Copper Alloy
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-S-13282	-	Silver and Silver Alloy
MIL-F-21840	-	Fastener Tape, Hook and Pile, Nylon

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:05Z
Check the source to verify that this is the currentversion before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWING

ARMY NATICK LABORATORIES

5-11-793 - Glove, Wire Mesh, Entire Hand; Illustration and Details

(Miniature copy of Drawing 5-11-793, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:05Z
Check the source to verify that this is the current version before use.

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the supplier shall furnish a sample of the item to be procured under this specification for first article inspection and approval (see 4.3 and 6.4).

3.2 Standard product. The gloves delivered under this specification shall be the manufacturer's commercial product, except for any changes necessary to comply with specification requirements. All like items furnished on any one contract, including parts and subassemblies thereof shall be new and interchangeable.

3.3 Materials and components. Materials and components shall be as specified herein (and on applicable drawing). Materials not definitely specified shall be of the quality normally used by the manufacturer in his standard commercial wire mesh glove provided that the completed item complies with all provisions of this specification.

3.3.1 Copper alloy wire. Copper alloy wire shall conform to the requirements for copper alloy No. 230, any temper, of QQ-W-321.

3.3.2 Webbing, polypropylene. The polypropylene webbing shall weigh not less than 0.4 ounce per linear yard, when tested as specified in 4.4.1.1, and shall be impervious to fungi, discoloration and moisture.

3.3.3 Thread, cotton. The cotton thread shall be unbleached ticket No. 12, 4-ply, conforming to type 1A1 or 1B1 of V-T-276.

3.3.4 Wrist fastener tape. The wrist fastener tape shall be 5/8-inch in width, white in color, and shall conform to type II of MIL-F-21840, except that hook monofilament material shall be polyester.

3.3.5 Silver. Silver shall conform to the requirements for grade A of MIL-S-13282.

3.4 Design and construction. The design and construction of the glove shall conform to the requirements specified herein and shown on Drawing 5-11-793.

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:05Z
Check the source to verify that this is the currentversion before use.

3.4.1 Wire mesh. The wire mesh shall be formed of interlocking rings of the copper alloy wire specified in 3.3.1. The joints of the interlocking rings shall be joined with the silver specified in 3.3.5.

3.4.2 Stitching. All thread shall conform to the requirement of 3.3.3 and stitching shall conform to type 301 of FED-STD-751, 5 to 8 stitches per inch.

3.5 Finish. The wire mesh shall be nickel plated in accordance with the manufacturer's standard practice.

3.6 Size marking. Each glove shall be marked S or M or L, to indicate small, medium or large sizes, respectively on the wrist strap or on a cloth label permanently affixed to the wrist strap of the glove, in accordance with the size requirements as specified on Drawing No. 5-11-793.

3.7 Workmanship. All components and assemblies of the wire mesh gloves shall be free from dirt and other harmful extraneous material, burrs and slivers.

3.7.1 Nickel plate. The nickel plate shall cover the wire mesh links and shall be free of visible evidence of blisters, pits, porosity, burning, burrs, protusions, modules, excess edge build up, and areas of no coverage.

3.7.2 Stitching. Stitching shall be free of breaks, missing rows, and open or loose seams. All thread ends shall be trimmed and there shall be no visible evidence of needle damage to the webbing.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).
3. Inspection of preparation for delivery (see 4.4.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:05Z
Check the source to verify that this is the current version before use.

4.3 First article. When a first article is required, the wire mesh gloves shall be as specified in table I and dimensions specified. The presence of any defect or of any dimension not within specified requirements shall be cause for rejection of first article.

4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, standards, and drawings unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.1.1 Weight of polypropylene webbing. Weigh one linear yard of the polypropylene webbing specified in 3.3.2 on scales certified accurate for trade to determine compliance with the weight specified in 3.3.2. The sample unit shall be one linear yard. The lot shall be all webbing offered for inspection at one time. Failure of the test shall be cause for rejection of inspection lot.

4.4.2 End item inspection. The inspection lot shall be all wire mesh gloves of one size and hand offered for inspection at one time.

4.4.2.1 Visual examination. The wire mesh gloves shall be examined for the defects listed in table I. The inspection level shall be level II with an AQL (acceptable quality level) of 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Finish not as specified	X	
	Any blister, pit, porosity, or indication of burning	X	
	Area of no coverage	X	
	Sharp burr, edge, or protrusion	X	
	Any module or excessive edge buildup		X
	NOTE: Slight discoloration due to baking shall not be scored a defect.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:05Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Design	Any characteristic not in accordance with specified requirements	X	
Construction and workmanship	Any component missing	X	
	Any component misplaced	X	
	Any component or assembly malformed	X	
Wire Mesh	Any ring in the wire mesh glove not engaging four other rings, except in the seam area	X	
	Any of the connecting rings in the seam area not joined	X	
	One open ring		X
	Two or more open rings	X	
	Insertions of the wire mesh into the wrist strap not accomplished as specified	X	
Stitching (wrist strap)	Not type specified		X
	Any row of stitching missing	X	
	Any open seam 1/4 inch or more	X	
	Any open seam less than 1/4 inch		X
	One stitch per inch less than the minimum specified		X
	More than one stitch per inch less than the minimum specified	X	
	More stitches per inch than maximum specified damaging webbing	X	
	More stitches per inch than maximum specified but not damaging webbing		X
	Loose stitch tension resulting in a loosely secured seam	X	
	Thread ends not trimmed throughout		X
Webbing	Any hole, cut, or frayed edge	X	
	Needle chews less than 1/8 inch		X
	Needle chews more than 1/8 inch	X	
Fastener tape	Hook tape crushed, affecting closure	X	
Marking	Missing, incomplete, incorrect, not legible, not specified size, not in proper location or not accomplished as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:05Z
Check the source to verify that this is the current version before use.

4.4.2.2 Dimensional examination. The wire mesh gloves shall be examined for compliance with dimensions specified. Any dimension not within this specification tolerance shall be a defect. The inspection level shall be S-3 with an AQL of 4.0 defects expressed in terms of defects per hundred units.

4.4.3 Inspection of preparation for delivery. An inspection shall be made to determine that packaging, packing, and marking comply with the requirements of section 5 of this specification. Defects shall be as indicated in table II. The lot shall be the number of shipping containers offered for inspection at one time. The sample unit shall be one shipping container fully prepared for delivery. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

TABLE II. Examination of preparation for delivery

Examine	Defect
Markings	Missing; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Component missing, damaged, or otherwise defective.
Contents	Contents per container more or less than specified.

4.4.3.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each glove shall be placed in a nominal .0025-inch thick polyethylene bag. The bag shall be closed and secured. Six bagged right-hand or left-hand gloves of one size only shall then be packaged in a nominal .0025-inch thick polyethylene bag. The bag shall be closed and secured.

5.1.2 Level C. Gloves shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:05Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Fifty right-hand or fifty left-hand gloves of one size only, packaged as specified in 5.1, shall be packed in a shipping container conforming to style RSC, grade V3s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with PPP-B-636.

5.2.2 Level B. Fifty right-hand or fifty left-hand gloves of one size only, packaged as specified in 5.1, shall be packed in a shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 200 of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be V3c, V3s, or V4s, fabricated and closed in accordance with PPP-B-636.

5.2.3 Level C. Gloves, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The gloves covered by this specification are intended to protect the hand in meat-cutting operations. The glove is worn over a white cotton glove insert.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification
(b) Size of glove required and whether for right or left hand (see 1.2)
(c) When a first article is required (see 3.1, 4.3, and 6.3)
(d) Selection of the applicable level of packaging and packing (see 5.1 and 5.2)
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1)

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a first

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:05Z
Check the source to verify that this is the current version before use.

article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instructions regarding arrangements for inspection and approval of the first article.

6.4 Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:

Army - GL
Air Force - 82

Review activities:

Army - MD
Air Force - 45

Preparing activity:

Army - GL

Project No. 8415-0659

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:05Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 20261O-19T08:05Z
Check the source to verify that this is the current version before use.


GLOVE DIMENSIONS IN INCHES

SIZE	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	R
SMALL	1 3/8	2 3/8	1 1/2	3 7/8	1 1/2	2 3/8	3 1/4	1 3/8	3 1/4	3 3/8	1 1/4	3 1/2	2 3/8	1 1/4	8 1/2	10 1/2	7 1/2
MEDIUM	1 3/8	2 1/4	1 1/4	4	1 1/2	3 1/4	3 3/8	1 3/8	3 1/2	3 3/8	1 3/8	3 3/4	3	1 3/8	8 3/4	10 1/2	7 1/2
LARGE	1 3/8	2 3/8	1 3/4	4 1/8	1 1/2	3 3/8	3 1/2	1 3/8	3 3/4	3 3/4	1 3/8	3 7/8	3 1/4	1 1/4	9 1/2	11	8


TOLERANCE ± 1/4

NOTE
GLOVE SHALL BE LAID FLAT FOR MAKING DIMENSIONAL MEASUREMENTS

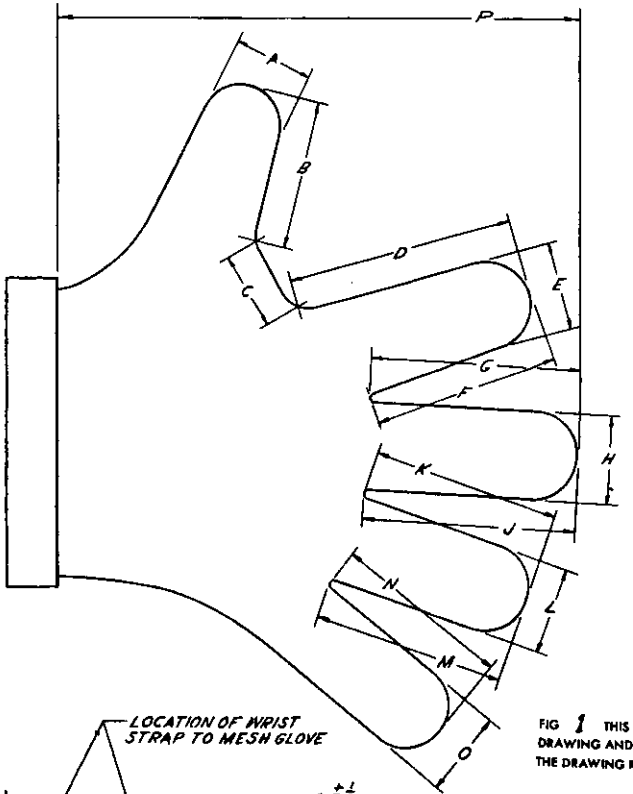


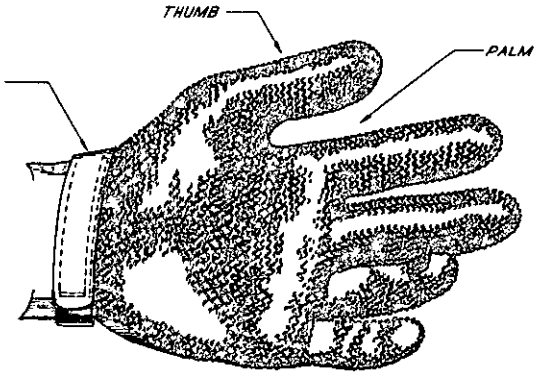

ILLUSTRATION



MESH, METAL, WIRE
SHOWING RING ASSEMBLY




RING

H	D-29-64	R.W.	M. V. S.	ON GLOVE DIM CHART, SMALL WAS MEDIUM, MEDIUM WAS LARGE & LARGE WAS EX LARGE	Rec'd	15 JAN 73
G	D-2401	R.W.	FF	ON STRAP, WRIST, DELETED "U.S." GLOVE SIZE STAMP & 5/16, 1/8 DIM CHANGED SIZE CHART WAS SMALL, MEDIUM & LARGE, IS ON STRAP WRIST & 5/16 WAS 5 ± 1/16 & 3 ± 1/16 WAS 3 ± 1/16	Rec'd	8 NOV 72
F	D-1376	R.W.	E.L.	CNGD FASTENER (NOTES ON HOOK & PILE ON WRIST STRAP)	E.L.	29 SEPT 70
E	GE-129	M.W. U.G.	LWB	TOL. FRACTION, WAS ± 1/32. "JOIN WITH SILVER AFTER ASSEMBLING" WAS "SOLDER AFTER ASSEMBLING"	HWT	6 NOV 67
D	MEO 2935		LWB	ADDED MIL SPEC NO IN STRAP, WRIST, DELETED DIM C, B, ADDED DIMS 1/2 ± 1/8, 3 ± 1/8 & 2 1/2 ± 1/8; WHERE TWO FASTENER WAS VELCRO OR EQUIV	Rec'd	13 MAY 69
C	ME 2704	F. K. C.	F. F. F.	REMOVED BUCKLE & CUT ADDED PILE END HOOK END TO WRIST STRAP; SMALL WAS MED, MED WAS LARGE, LARGE WAS EX LARGE DELETED, BUCKLE FROM ILLUS.	Rec'd	17 JAN 69
B	ME 1100	L. M.	LWB	CNGD GLOVES, IN TITLE TO GLOVE ADDED DIM. OF 2; ADDED GLOVE SIZES, RELOCATED U.S.	HAT	21 SEPT 59
A	ME 940	G. A.	J. H.	CNGD GLOVE DIM. ON LARGE "X" CNGD END CLIP AND WEBBING DIM	HAT	8 MAY 1958
SYM.	D.W.O. NO.	DR	CK	DESCRIPTION	PROJ ENGR	DATE APPROVED

REVISIONS

FIG 1 THIS FIGURE IS A MINIATURE COPY OF AN ARMY NATICK LABORATORIES DRAWING AND IS FOR INFORMATION ONLY; THE DRAWING REFERENCE IN PARAGRAPH 2.1 GOVERNS.

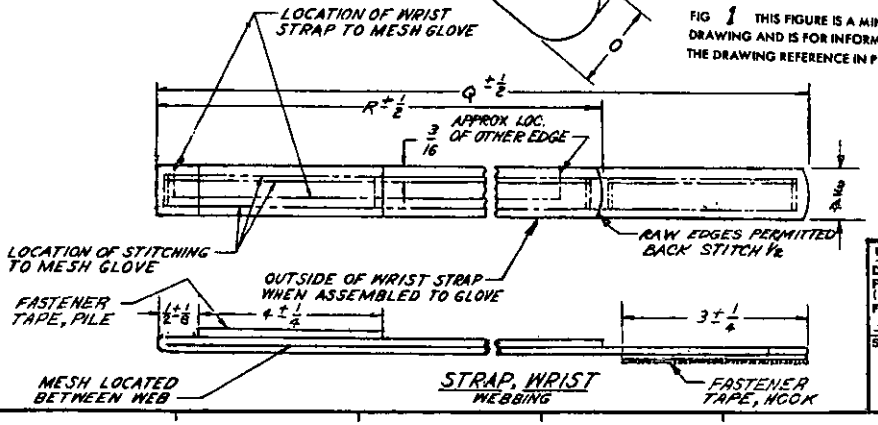

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
FABRICATING TOLERANCES: (WIRE & METAL GAGES EXCLUDED)
FRACTIONS ± 1/16 DECIMALS ± .005 ANGLES —
SUPERSEDES DRAWING:

DRAWN: R.P.WHITTY
CHECKED: J.GILMETTE
PROJ ENGR:
CHF DR'FSM:
APPROVED FOR THE Q.M.G.
DATE: 4 MAR 57

GLOVES, WIRE MESH, ENTIRE HAND; ILLUSTRATION AND DETAILS

DEPARTMENT OF THE ARMY
QUARTERMASTER CORPS
Q.M. RESEARCH & DEVELOPMENT CENTER
NATICK, MASS.

DWG. NO. C 5-11-793

SCALE: NONE (FOR REF ONLY DO NOT SCALE)
SPEC NO. MIL-G-20587
SHEET 1 OF 1