

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS
6240

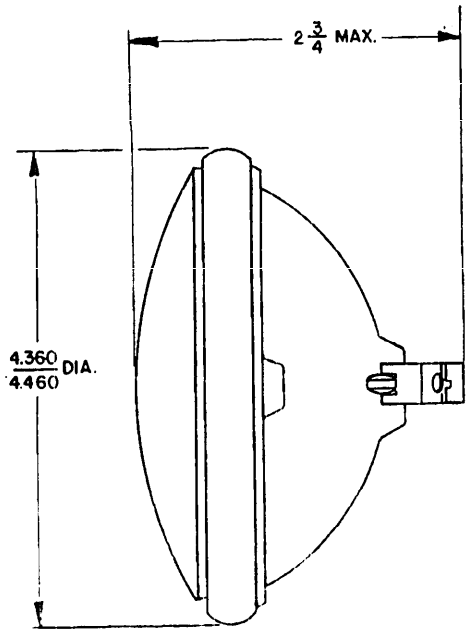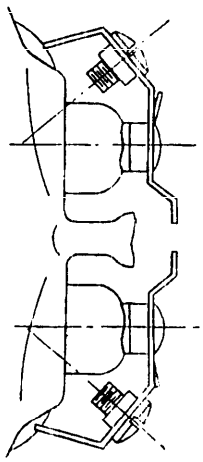

BASE TERMINAL

| MS PART NUMBER | DESIGN VOLTS | MAX. AMPS | INITIAL MAX. BEAM CANDLE-POWER (APPROX) | FILAMENT CONST. | BEAM SPREAD IN DEGREES (APPROX) HOR | VERT | HOURS LIFE APPROX | INDUSTRY NUMBER | FINISH | USE |
|---|---|---|---|---|---|---|---|---|---|---|
| MS16524-2 | 4.7 | 0.5 | 6,300 | C-2R | 9 | 9 | 100 | 4546 | ROUNDED | HAND LANTERN |

D ENTIRE STANDARD REVISED

PROJECT 6240-0076

APPROVED 4 Dec 1957 REVISED (D) 22 April 1963

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| | | |
|---|---|---|
| P.A. SHIPS<br>Other Cust MC<br>ASD | TITLE<br>LAMP, INCANDESCENT, PAR-36, SCREW TERMINAL | MILITARY STANDARD<br>MS 16524 |
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES: | SHEET 1 OF 1 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:57Z
Check the source to verify that this is the current version before use.