INCH-POUND

MS27479F
12 July 2002
SUPERSEDING
MS27479E
13 August 1974

DETAIL SPECIFICATION SHEET

# CONNECTOR, RECEPTACLE, ELECTRICAL, WALL MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-38999.

Inactive for new design.

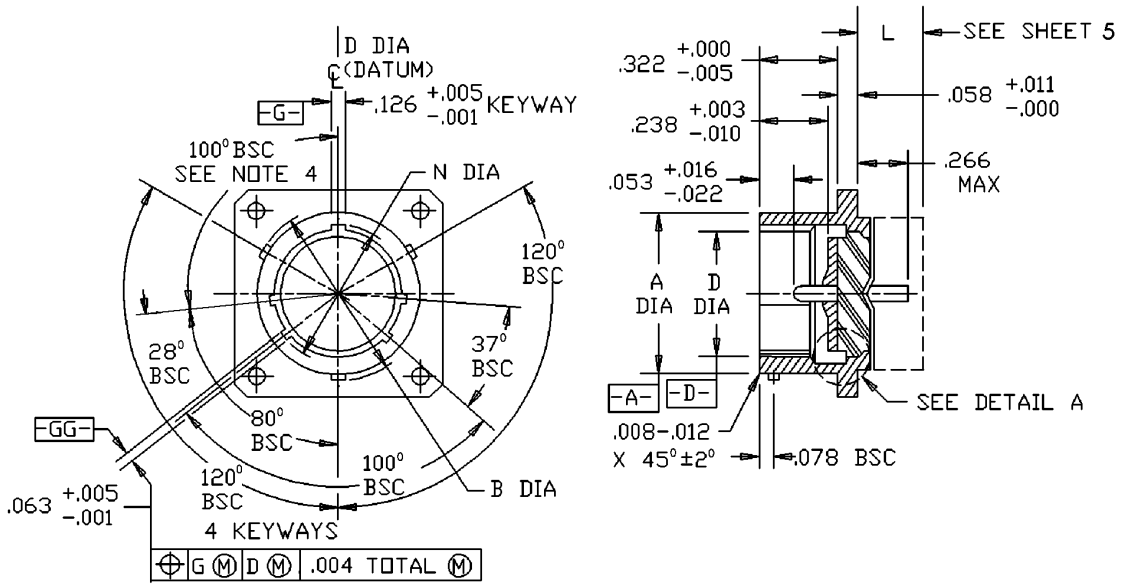



FIGURE 1. ~~Receptacle, classes E and T~~.



~~DISTRIBUTION STATEMENT A~~. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

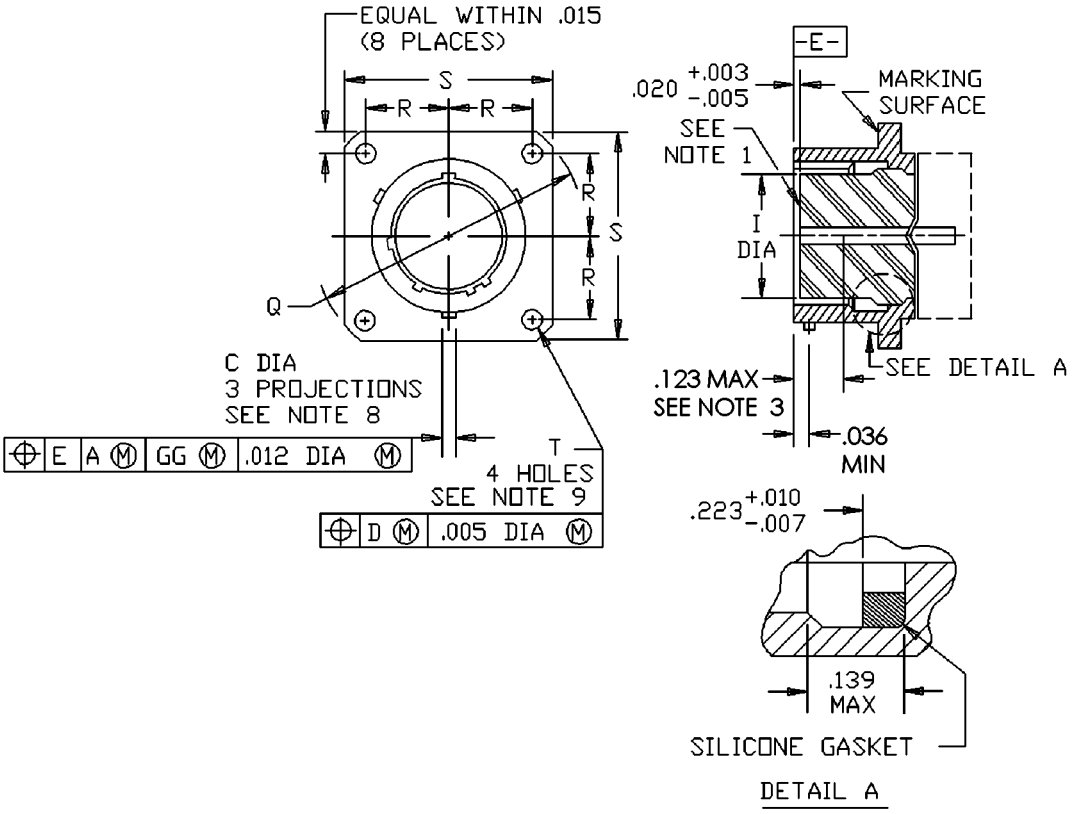



FIGURE 1. ~~Receptacle, classes E and I~~ – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.


| Shell size | A dia +.001 -.005 | B dia +.000 -.016 over projection | C dia +.006 -.002 | D dia +.005 -.001 | I dia ±.005 | N dia +.005 -.006 |
|---|---|---|---|---|---|---|
| 8 | .473 | .563 | .078 | .362 | .285 | .412 |
| 10 | .590 | .680 | | .490 | .413 | .540 |
| 12 | .750 | .859 | | .607 | .527 | .689 |
| 14 | .875 | .984 | | .732 | .652 | .814 |
| 16 | 1.000 | 1.103 | | .857 | .777 | .939 |
| 18 | 1.125 | 1.233 | | .962 | .866 | 1.039 |
| 20 | 1.250 | 1.358 | .125 | 1.087 | .991 | 1.164 |
| 22 | 1.375 | 1.483 | | 1.212 | 1.116 | 1.289 |
| 24 | 1.500 | 1.610 | | 1.337 | 1.241 | 1.414 |

| Shell size | Q Max | R BSC | S Max | T +.010 -.005 | CC | For insert arrangement, see MS drawing |
|---|---|---|---|---|---|---|
| 8 | 1.078 | .297 | .828 | .120 | .004 | 27343, 27516 |
| 10 | 1.266 | .3595 | .954 | | .010 | 27344, 27517 |
| 12 | 1.391 | .406 | 1.047 | | | 27345, 27518 |
| 14 | 1.516 | .453 | 1.141 | | | 27346, 27519 |
| 16 | 1.641 | .4845 | 1.234 | | | 27347, 27520 |
| 18 | 1.766 | .531 | 1.328 | | | 27348, 27521 |
| 20 | 1.891 | .578 | 1.453 | | | 27349, 27522 |
| 22 | 2.016 | .625 | 1.578 | | | 27350, 27523 |
| 24 | 2.204 | .6875 | 1.703 | .147 | | 27351, 27524 |

FIGURE 1. ~~Receptacle, classes E and T~~ – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

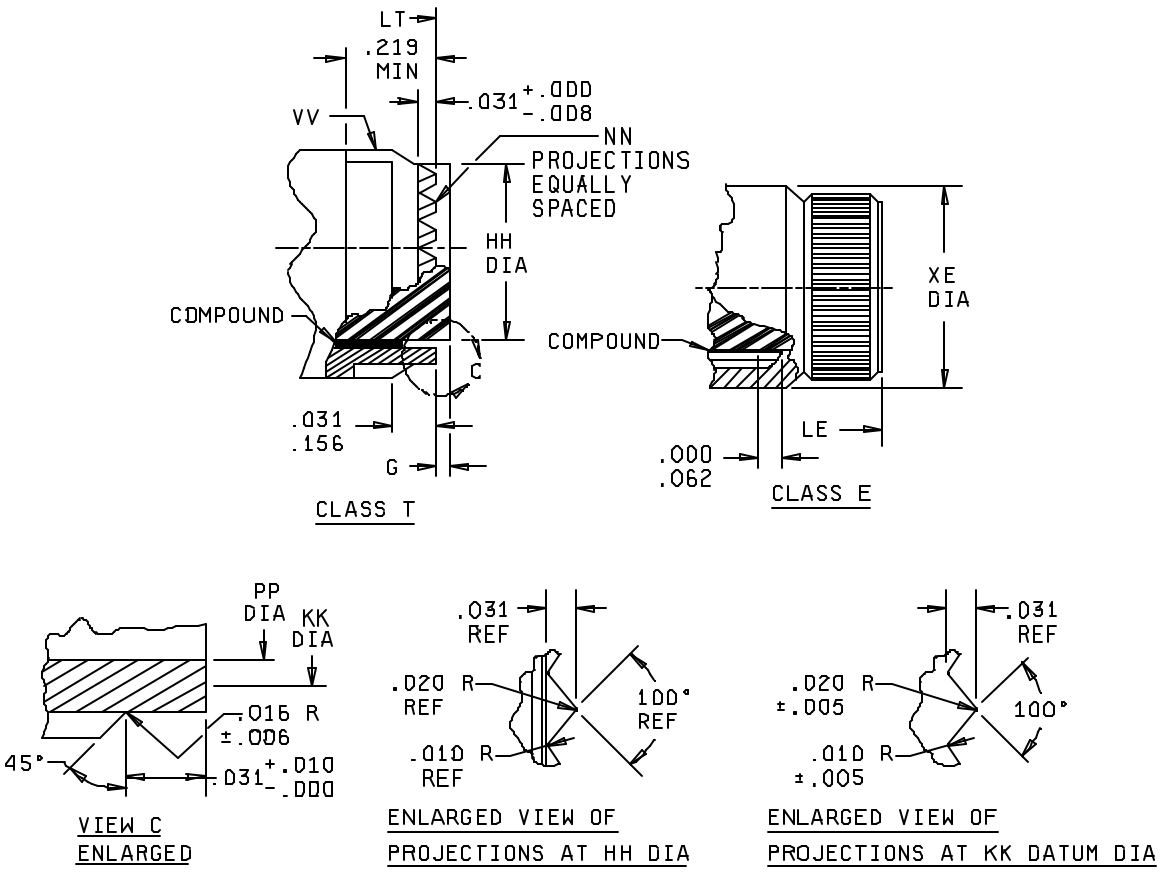


NOTES:

1. Insert front surface shall be flat within .005 T.I.R.
2. Dimensions are in inches.
3. The point at which a gage pin, having the same basic diameter as the mating contact and a square face, touches socket contact spring.
4. Normal keyway position. For other keyway positions see MIL-DTL-38999.
5. Diameters A and D shall be concentric within .015 T.I.R.
6. Diameter A with respect to diameter B, and diameter D with respect to diameter N, shall be concentric at MMC.
7. Diameters D and I shall be concentric within .015 T.I.R at MMC.
8. The gauge features for GG shall be CC smaller than their MMC size at basic location.
9. The gauge features for GG shall be .010 smaller than their MMC size at basic location.

FIGURE 1. ~~Receptacle, classes E and T~~ – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

| Shell size | G insert projection class T only | HH dia +.000 -.005 | KK DATUM dia | NN | PP dia ± .003 |
|---|---|---|---|---|---|
| 8 | .120 ± .030 | .387 | .366 | 12 | .344 |
| 10 | | .515 | .487 | 16 | .472 |
| 12 | | .628 | .609 | 20 | .586 |
| 14 | | .754 | .731 | 24 | .711 |
| 16 | | .879 | .853 | 28 | .836 |
| 18 | | .985 | .974 | 32 | .942 |
| 20 | | 1.110 | 1.097 | 36 | 1.067 |
| 22 | | 1.235 | 1.218 | 40 | 1.192 |
| 24 | .0900 ± .050 | 1.360 | 1.340 | 44 | 1.317 |

| Shell size | LE max overall length | LT max overall length | XE max dia | VV Thread UNEF-2A MOD (plated) | |
|---|---|---|---|---|---|
| | | | | Size | Major dia MOD |
| 8 | .562 | .391 | .594 | 7/16 – 28 | .421 – .417 |
| 10 | | | .719 | 9/16 – 24 | .542 – .538 |
| 12 | | | .844 | 11/16 – 24 | .667 – .663 |
| 14 | | | .969 | 13/16 – 20 | .791 – .787 |
| 16 | | | 1.094 | 15/16 – 20 | .916 – .912 |
| 18 | | | 1.219 | 1 1/16 – 18 | 1.034 – 1.030 |
| 20 | | | 1.344 | 1 3/16 – 18 | 1.158 – 1.154 |
| 22 | | | 1.469 | 1 5/16 – 18 | 1.283 – 1.279 |
| 24 | | .469 | 1.594 | 1 7/16 – 18 | 1.408 – 1.404 |

FIGURE 1. ~~Receptacle, classes E and T~~ – Continued.

REQUIREMENTS:




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

Dimensions and configuration: See figure 1. Interface dimensions shall conform to MIL-DTL-38999. This receptacle mates with MS27473, MS27480, MS27484 and MS27500.

Insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

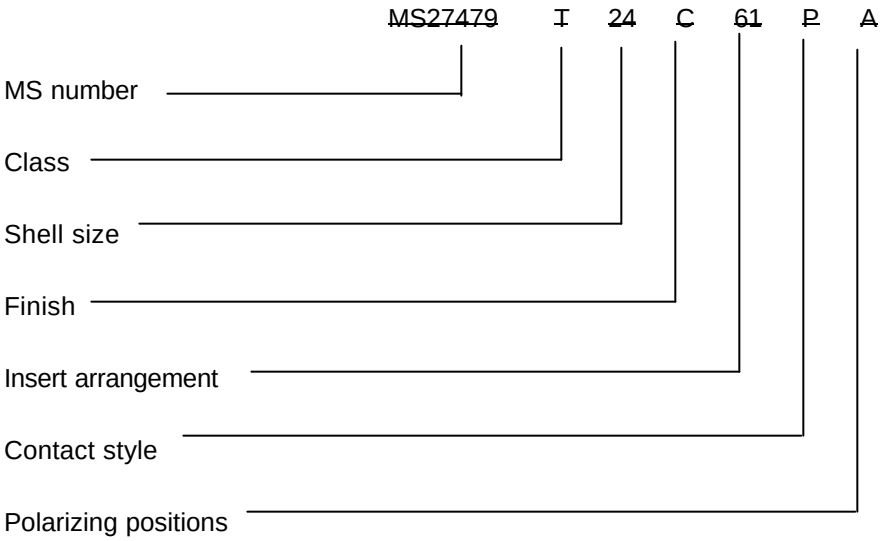


no letter is required for normal.

## CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 11
DLA – CC

Review activities:
Army – AR, MI
Navy – EC, MC, OS
Air Force – 19, 99

Preparing activity:
DLA – CC

(Project 5935–4373)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.