
FED SUP CLASS
4730

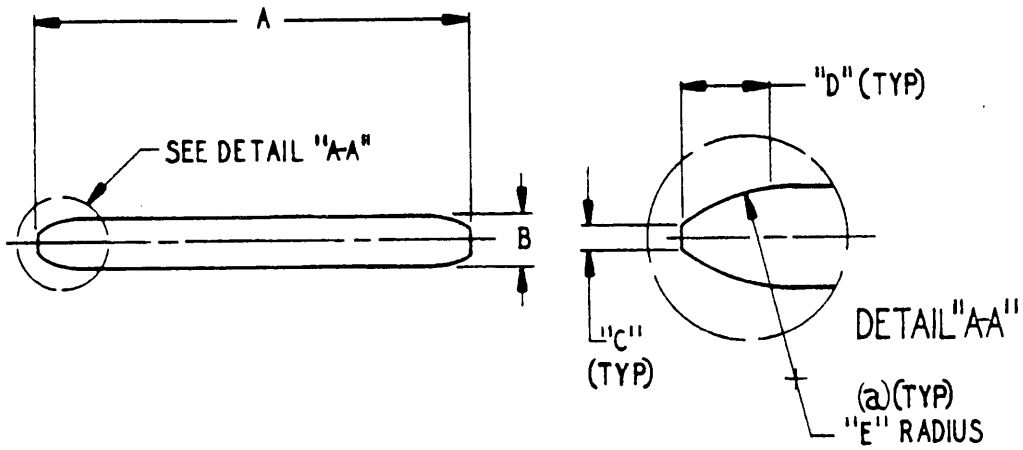

MS PART NUMBER	A ±.015	B +.000 −.004	C ±.010	D ±.005	E +.010 −.000
MS27625-4C	1.438	.080	.020	.073	.156
MS27625-6C	1.735	.095	.023	.087	.186
MS27625-8C	2.203	.095	.023	.087	.186
MS27625-10C	2.625	.125	.031	.115	.246

NEXT ASSEMBLY MS27620, MS27621, MS27633 AND MS27634

THIS IS A DESIGN STANDARD FOR MANUFACTURING PURPOSES. THE ITEM IS ONLY PROCURED AS AN INTEGRAL PART OF ADAPTER ASSY.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: RADIUS OR BREAK ALL CORNERS .005, +.005/−.000. REMOVE ALL BURRS AND SLIVERS. SURFACE ROUGHNESS PER ANSI B46.1−1962 NOT TO EXCEED 125 AA.

WIRE SHALL BE STRAIGHT WITHIN .020 TIR.

DRY-FILM LUBRICATE IN ACCORDANCE WITH MIL-L-8937.

PASSIVATE PER MIL-F-83296

MATERIAL: CORROSION RESISTING STEEL, CLASS 305 OR 304 CONDITION "A", SPECIFICATION QQ-W-423.

(a) RADIUS MUST BE CONCENTRIC TO WIRE OD WITHIN .005 TIR.

APPROVED 17 Mar 71

P.A. USAF-11 Other Cust	TITLE WIRE, RETAINER	MILITARY STANDARD MS27625
Procurement Specification	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672 (Limited coordination) OMS OF THIS FORM ARE OBSOLETE

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.