

FED. SUP CLASS
4730

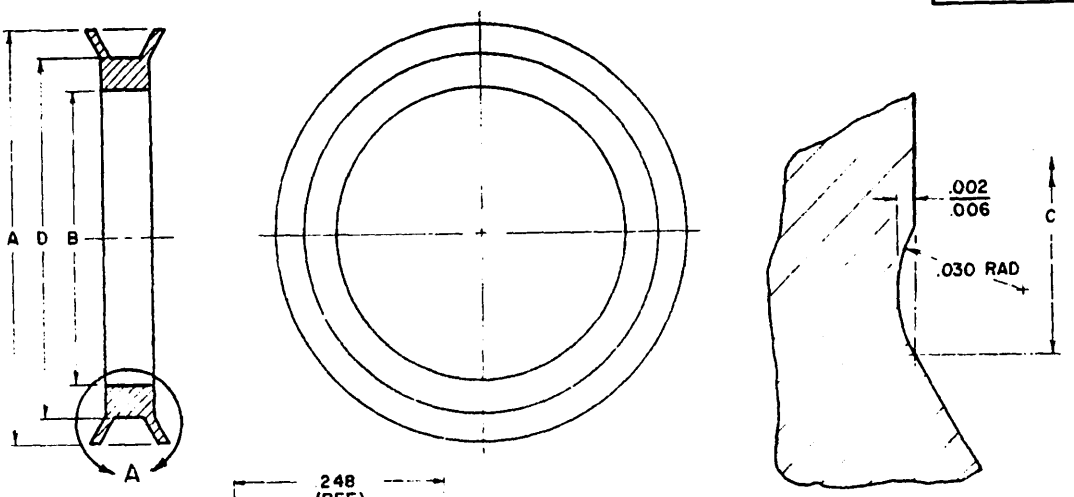

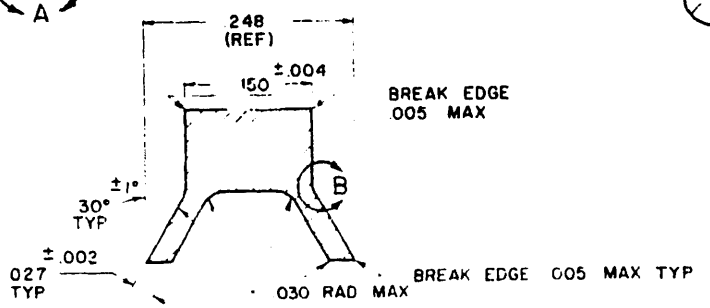

MS PART NO.	A DIA +.000 -.002	B DIA +.002 -.000	C DIA +.010 -.000	D DIA +.000 -.005	APPROX WEIGHT LB/100
MS27860-04	468	220	298	300	
MS27860-06	606	340	436	438	
MS27860-08	722	440	522	524	
MS27860-12	984	680	824	826	
MS27860-16	1280	920	1110	1112	.331

1. ALL DIAMETERS SHALL BE CONCENTRIC WITHIN .002 FIR
2. MATERIAL: ALUMINUM ALLOY, AMS 4127, OVERAGED PER MIL-F-27417
3. CLEANING: FINISHED PARTS SHALL BE CLEANED PER MIL-F-27417
4. SURFACE TEXTURE: IN ACCORDANCE WITH USAS B46.1, UNLESS OTHERWISE SPECIFIED ALL SURFACES TO BE 32 MICROINCHES
5. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
6. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS ±.010, ANGLES ±5°
7. RUBBER STAMP PART NO AND MFR IDENT ON CONTAINER OR PACKAGING PER AS 478-30.
8. DO NOT USE UNASSIGNED PART NUMBERS
9. REFER TO MS27856 FOR ASSEMBLY.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 14 JULY 1967 REVISED

Review activities: 11, 14, 19, 69, 85, 8 NAS

This standard has been approved by the Department of the AIR FORCE and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF 12 Other Cust	TITLE SEAL, ALUMINUM, FLUID CONNECTION FITTING, LOW PRESSURE	MILITARY STANDARD MS27860 (USAF)
PROCUREMENT SPECIFICATION MIL-F-27417	SUPERSEDES	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:53Z
Check the source to verify that this is the current version before use.