


FED SUP CLASS
5340

REVIEWER EAGLE,IS,MI,MUSH
USER AV,MC,ME,PA,WV

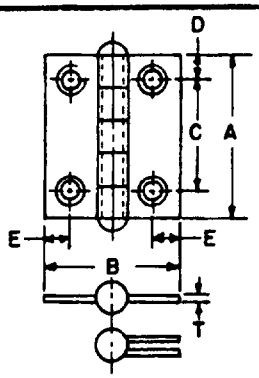

FAST AND LOOSE PIN



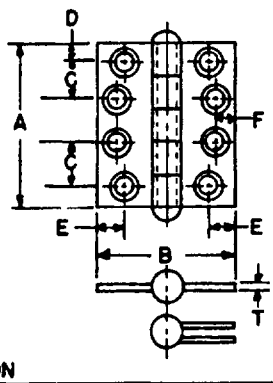

SWAGED, FOR MORTISE APPLICATION

NOMINAL SIZE	A LENGTH	+.00 -.02	1.50	1.50	2.00	2.00	2.00	2.50	2.50	3.00
	B WIDTH	±.02	1.25	2.00	1.50	2.00	2 50	2.00	2.50	2.00
	C	±.005	1.000	1.000	1.375	1.375	1.375	.938	.938	1.188
	D	±.005	.250	.250	.312	.312	.312	.312	.312	.312
	E	±.005	.171	.312	.250	.312	.312	.320	.320	.312
	F	±.005						.320	.516	.312
	T THICKNESS	±.005	.074	.074	082	.082	.082	.089	.089	.092
NUMBER OF SCREW HOLES			4	4	4	4	4	6	6	6
* SIZE OF SCREWS		MIN	#6 32 x 1/2	#6 32 x 1/2	#8 32 x 1/2	#8 32 x 1/2	#8 32 x 1/2	#8 32 x 1/2	#8 32 x 1/2	#10 24 x 1/2

TYPES	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
FAST PIN, SWAGED		4		8	10	12		16
LOOSE PIN, SWAGED	32	34	36	38	40	42	44	46

NOMINAL SIZE	A LENGTH	+.00 -.02	3.00	3.00	3.00	3.50		3.50		4.00
	B WIDTH	±.02	2.50	3.00	4.00	3.00		3.50		4.00
	C	±.005	1.188	1.188	1.188	1.395		1.395		1.004
	D	±.005	.312	.312	.312	.355		.355		.512
	E	±.005	.312	.312	.312	.360	.687	.360	.687	.750
	F	±.005	.580	.580	.580	.687	.360	.687	.360	.375
	T THICKNESS	±.005	.092	.092	.092	.123		.123		.130
NUMBER OF SCREW HOLES			6	6	6	6		6		8
* SIZE OF SCREWS		MIN	#10 24 x 1/2	#10 24 x 1/2	#10 24 x 1/2	#10 24 x 1/2		#10 24 x 1/2		#12 24 x 1/2

TYPES	DASH NUMBER	DASH NUMBER	DASH NUMBER	(B) ** DASH NUMBER	DASH NUMBER	(B) ** DASH NUMBER	DASH NUMBER	DASH NUMBER
FAST PIN, SWAGED	18		22	**24	25			
LOOSE PIN, SWAGED	48	50	52	**54	55	** 56	57	58

NOTES.

(B) 1. MATERIAL: Body: Steel in accordance with ASTM A570, ASTM A611 or their commercial equivalent. Pin: Brass in accordance with ASTM B121 (any alloy) annealed, or corrosion resisting steel in accordance with FED. STD. No. 66, number 302, 303, 304, 305 or 430.

(B) 2. PROTECTIVE COATING. Zinc plated, in accordance with QQ-Z-325, type II, class 2 or MIL-C-81562, type II, class 2.

(B) 3. *SCREWS: Hinges are furnished with flat undercut-head, UNC-2A, carbon steel screws in accordance with FF-S-92.

4. DIMENSIONS All dimensions are in inches unless otherwise specified.

5 PART NUMBER The MS part number consists of the MS number, plus the dash number. Example: MS27956-4

6. Referenced documents shall be of the issue in effect on date of invitations for bid.

7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(B) ** INACTIVE FOR NEW DESIGN AFTER 30 OCT 1975

APPROVED 24 FEB 1961 REVISED A 6 MAR 1964 B 30 OCT 1975

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Coast YD 82	TITLE (B) HINGE, BUTT, NARROW AND BROAD, TEMPLATE, STEEL	MILITARY STANDARD MS27956
PROCUREMENT SPECIFICATION MIL-H-1237	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:53Z
Check the source to verify that this is the current version before use.