FED. SUP CLASS
4730

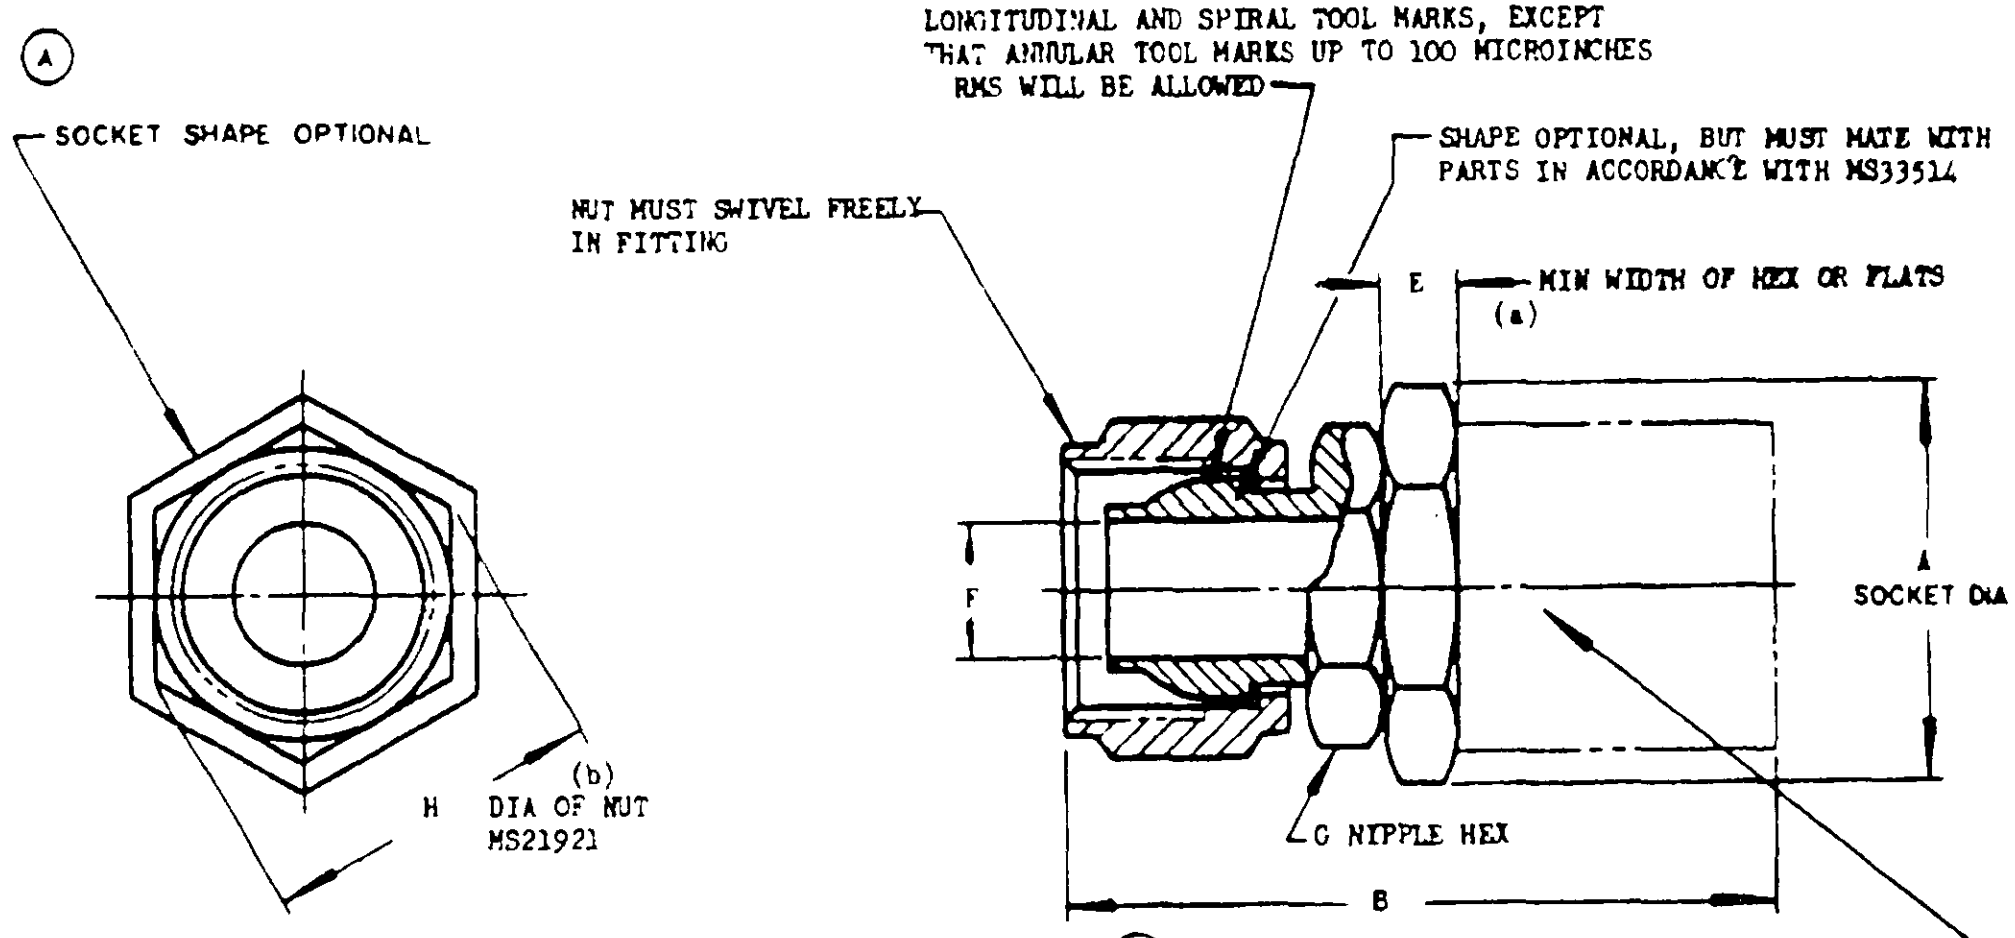
Ⓐ
SOCKET SHAPE OPTIONAL
H
(b)
DIA OF NUT
MS21921
NUT MUST SWIVEL FREELY IN FITTING
THIS SURFACE MUST BE FREE FROM BURRS, LONGITUDINAL AND SPIRAL TOOL MARKS, EXCEPT THAT ANNULAR TOOL MARKS UP TO 100 MICROINCHES RMS WILL BE ALLOWED
SHAPE OPTIONAL, BUT MUST MATE WITH PARTS IN ACCORDANCE WITH MS33514
E
MIN WIDTH OF HEX OR FLATS
(a)
F
A
SOCKET DIA
G NIPPLE HEX
B

Ⓐ THE MFR'S SOCKET PART NO., DASH SIZE, AND MFR'S NAME OR TRADE-MARK SHALL BE PERMANENTLY MARKED ON THE SOCKET

MS PART NO.	HOSE ID REF	TUBING OD	(b) NUT	A MAX DIA	Ⓐ B MAX	(a) E MIN	F MIN DIA	Ⓐ G NIPPLE HEX	Ⓐ H REF
MS28761-4	7/32	1/4	MS21921-4	.875	2.491	.188	.146	.563	.649
MS28761-5	9/32	5/16	MS21921-5	.937	2.631		.177	.625	.721
MS28761-6	11/32	3/8	MS21921-6	1.160	3.000	.250	.271	.688	.794
MS28761-8	7/16	1/2	MS21921-8	1.375	3.310		.365	.875	1.018
MS28761-10	9/16	5/8	MS21921-10	1.550	3.564	.312	.455	1.000	1.155
MS28761-12	11/16	3/4	MS21921-12	1.740	3.873	.375	.568	1.250	1.443
MS28761-16	7/8	1	MS21921-16	2.000	4.511		.800	1.500	1.732

(a) HEX OR FLATS SHALL FIT STANDARD WRENCH OPENINGS.

(b) A NON-STANDARD SWIVEL NUT MAY BE USED, PROVIDED THE HEX AND THREAD DIMENSIONS ARE IN ACCORDANCE WITH MS21921, AND PROVIDED THE NUT CANNOT BE REMOVED FROM ASSEMBLY.

THE MS PART NUMBER SHALL BE MARKED ON A REMOVABLE TAG SECURELY ATTACHED TO THE END FITTING ASSEMBLY.

Ⓐ NIPPLES AND NUT SHALL BE OF STEEL AND SOCKET OF ALUMINUM, AS SPECIFIED IN SPECIFICATION MIL-F-8789.

THESE FITTINGS FOR USE WITH SPECIFICATION MIL-H-8788 HOSE AS SHOWN ON STANDARD MS28762.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1°.

CLEARANCE SHALL BE ALLOWED FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS STANDARD FOR INSTALLATION.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HERE IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 7 Sep 56 REVISED Ⓐ 25 AUG 70

The military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities
Navy - AS
USAF - 82

P.A. USAF - 82 Other Cust Navy - AS	TITLE Ⓐ FITTING END, ATTACHABLE, HYDRAULIC HIGH PRESSURE HOSE (3,000 PSI), FLARELESS TUBE	**MILITARY STANDARD** **MS28761**
PROCUREMENT SPECIFICATION MIL-F-8789	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:59Z
Check the source to verify that this is the current version before use.