This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5935

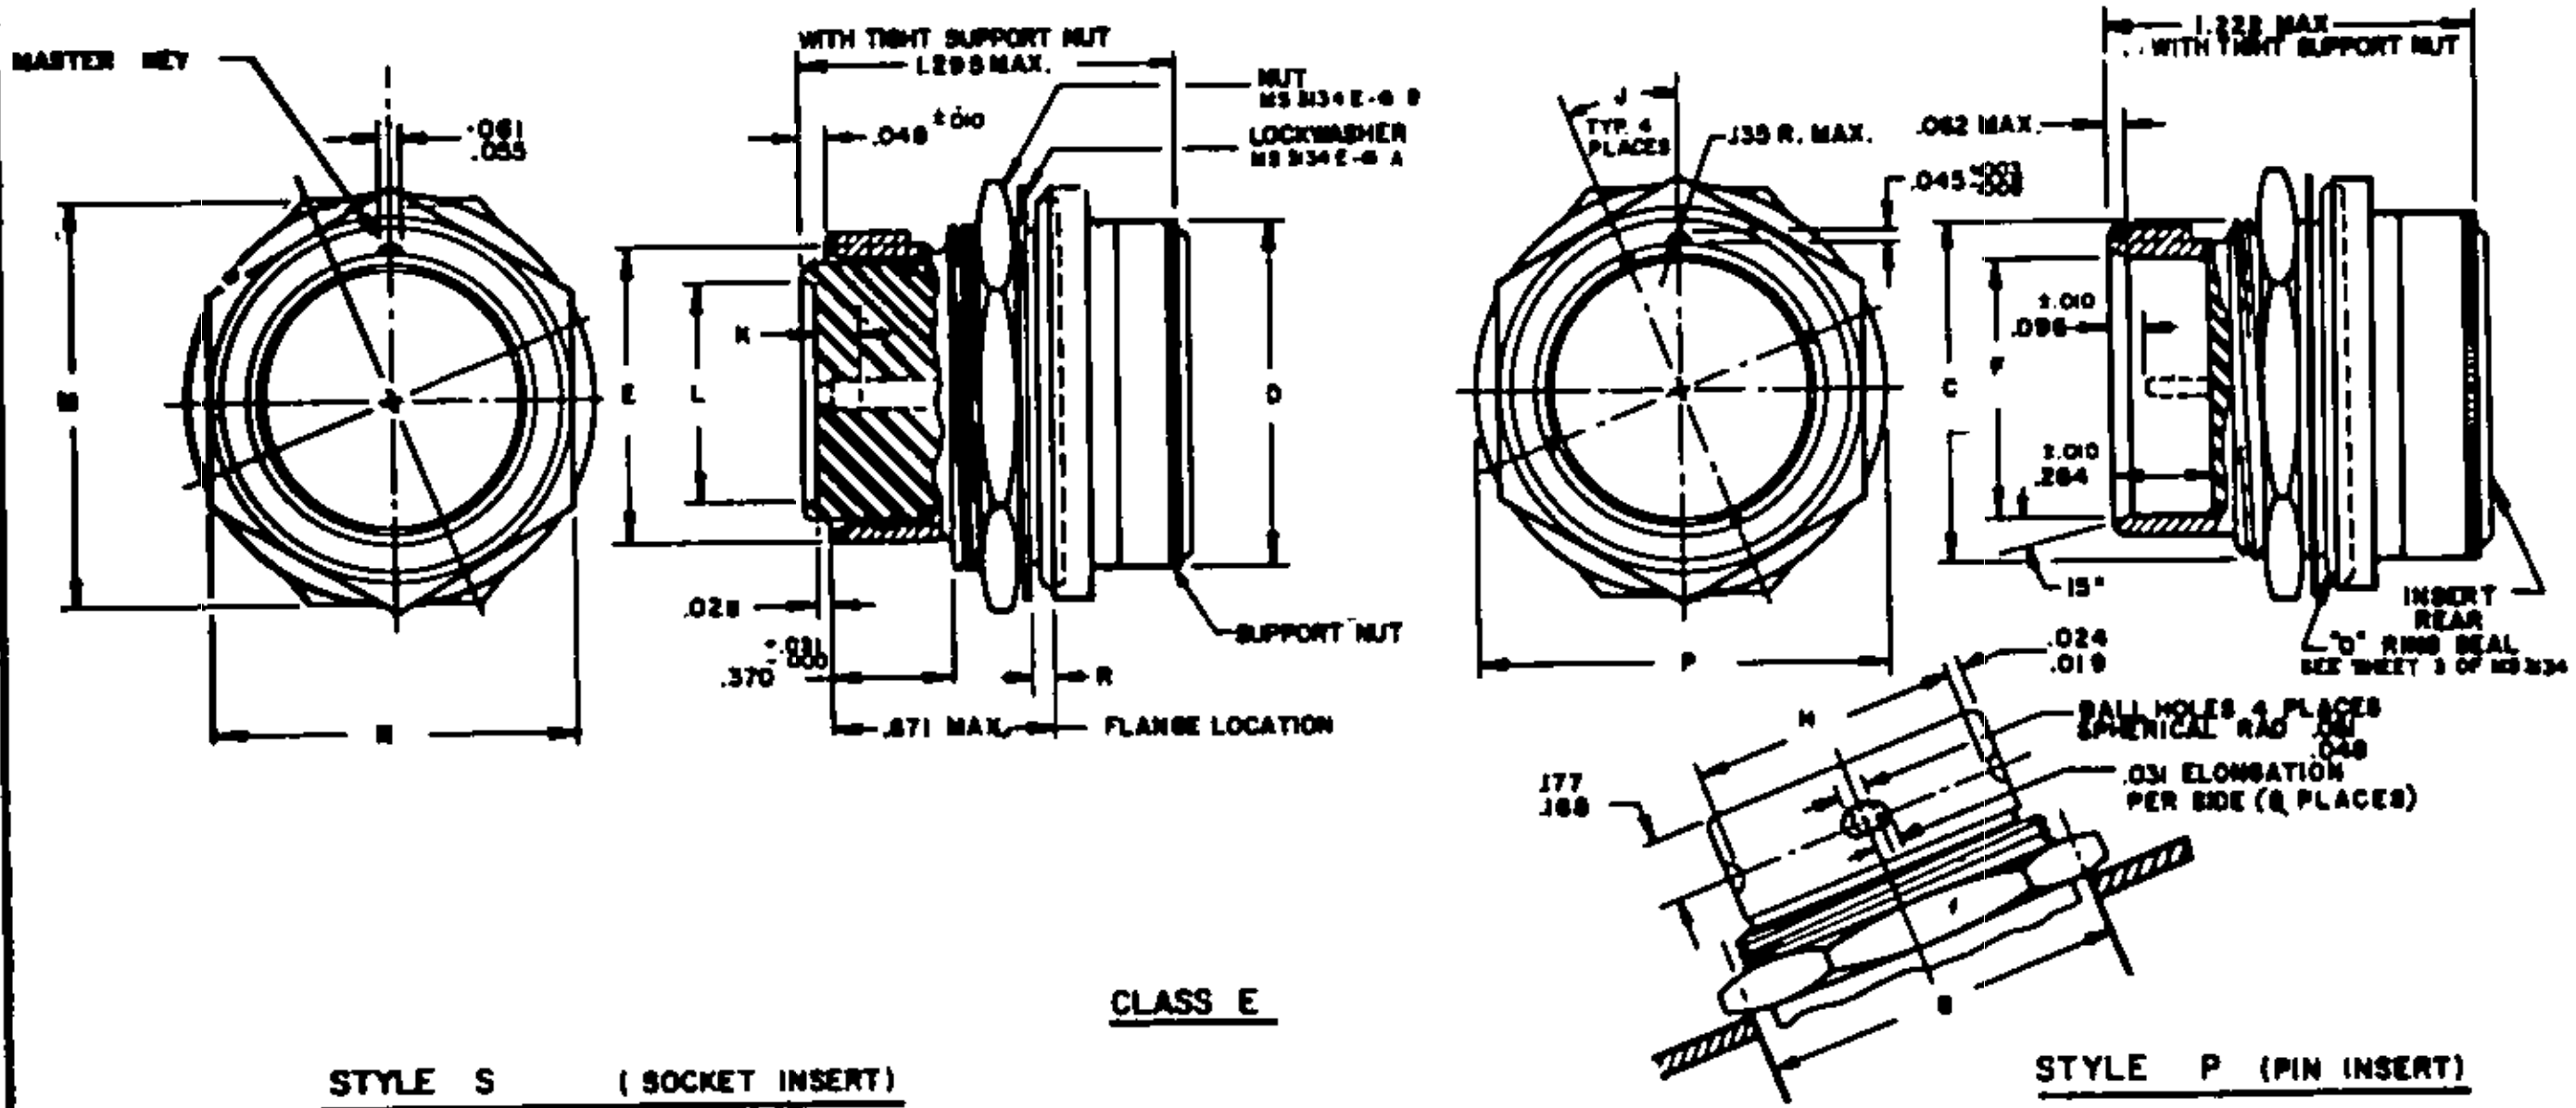

CLASS E

STYLE S (SOCKET INSERT)

STYLE P (PIN INSERT)

SHELL SIZE DASH NO.	C THREAD SIZE	E +.006 -.004 SHELL O.D.	F +.003 -.007 SHELL I.D.	G +.020 -.005 MTG. HOLE DIA.	H +.002 -.003 BALL HOLE SPACING	J BALL HOLE LOCATION	K POINT OF SPRING CONTACT	L INSERT SEAL I.D.	M FLATS FLANGE	N FLATS NUT	P DIA. FLANGE 90° FROM FLATS	R MAX. PANEL THK.	D MAX. DIA. REAR	FOR INSERT ARRANGEMENT SEE DWG.
-3	9/16-24 UNEF-2A	.435	.364	.571	.396	30°	.138 MAX. MEASURE WITH SQUARE NOSE PIN HAVING BASIC DIAMETER OF MATING CONTACT	.284	.750	.625	.750	.062	.625	MS 33698
-7	11/16-24 UNEF-2A	.570	.480	.696	.531	22½°		.380	.875	.812	.875	.093	.702	MS 33699
-12	13/16-20 UNEF-2A	.704	.621	.818	.666			.320	1.062	.937	1.062		.828	MS 33700
-19	1-20 UNEF-2A	.843	.760	1.010	.804			.660	1.156	1.062	1.187		.953	MS 33701
-27	1 1/8-18 UNEF-2A	.998	.915	1.135	.939			.815	1.312	1.250	1.312		1.102	MS 33702
-37	1 1/4-18 UNEF-2A	1.120	1.037	1.260	1.081			.937	1.420	1.375	1.500		1.266	MS 33703

EXAMPLE OF PART NO. MS3144 E 12-10 S Y
MS NO. — CLASS — SIZE — INSERT ARRANGEMENT — CONTACT STYLE — ALTERNATE INSERT POSITION

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED, TOLERANCE DECIMALS ±.010
ANGULAR TOLERANCE ±1/2°

NOTE: FOR DETAILS OF MOUNTING NUT AND LOCKWASHER, SEE MS3134 SHEET 3
FOR "O" RING SEE MS29513.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 10 SEPT 62 REVISED Ⓐ 1 NOV 1966 Ⓑ 4 Mar 67 Ⓒ 21 JULY 1971

P.A. NAVY-AS Other Cust USAF-11 ARMY-EL	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC CRIMP TYPE, JAM NUT MOUNTING, PUSH-PULL COUPLING SERIES 2 (CLASS E AND J)	MILITARY STANDARD MS 3144
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 1 OF 2

DD FORM 672 10 APR 64 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

FED. SUP CLASS
5935

CLASS J JACKETED CABLE GLAND SEAL

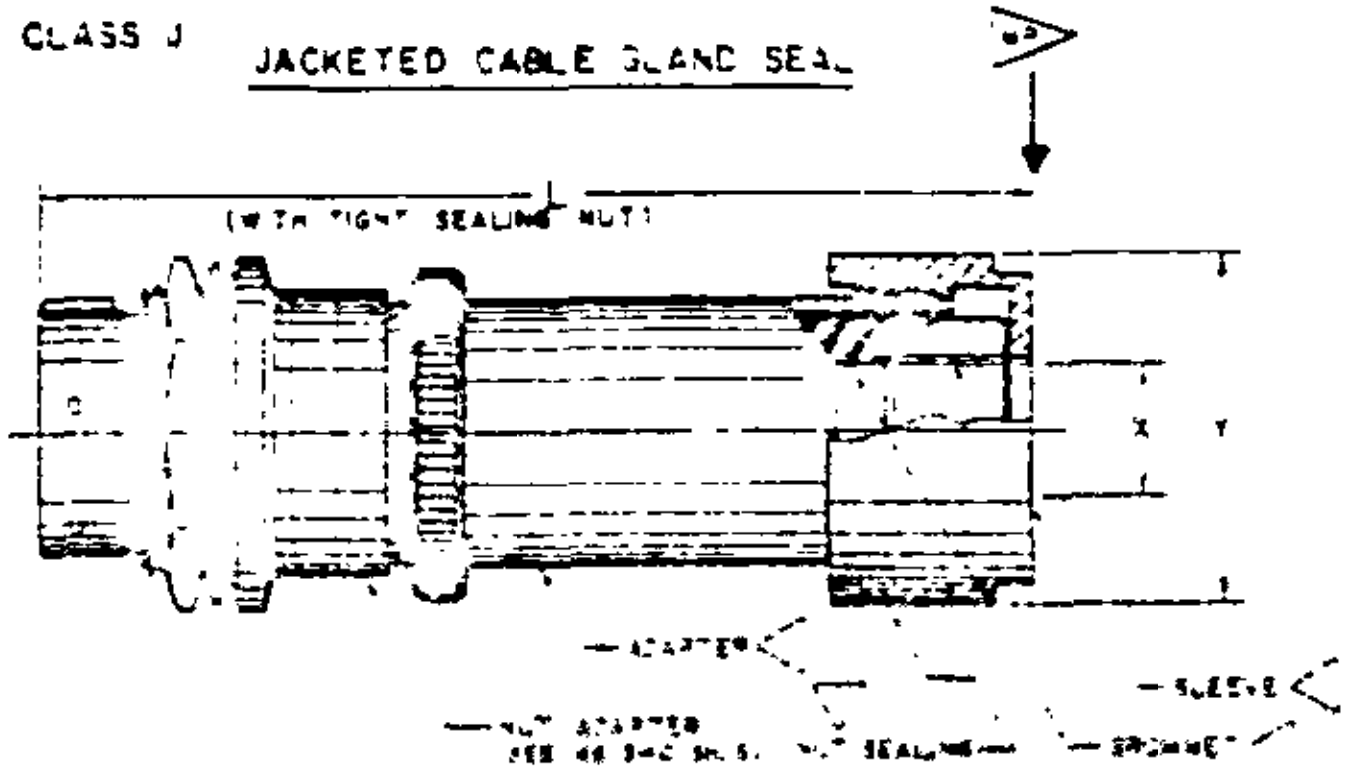

SHELL SIZE DASH NO.	L LENGTH MAX	X INSIDE DIA.		Y MAX	MAX CABLE RETENTION IN POUNDS (ALLOWABLE FORCE IN DIRECTION NOTED)
		MIN	MAX		
-3	[illegible]	[illegible]	.210	.445	8.3
-7	3.094	.341	.413	.926	27
-2	4.460	.412	.444	.988	42
-9	4.494	.522	.554	[illegible]13	55
-27	4.494	.800	.832	1.113	68
-37	4.525	.862	.894	1.176	120

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
TOLERANCE DECIMALS ±.016, ANGULAR TOLERANCE ±1/2°

1 FOR ADAPTER, SEALING NUT, GROMMET & SLEEVE SEE MS 3130 SH. 3.

CLASS J JACKETED CABLE GLAND SEAL — WATERTIGHT TYPE - FOR USE WITH CLASS E CONNECTORS.

EXAMPLE OF PART NO.

MS3144 J 18-20 P Y

- MS NUMBER: MS3144
- CLASS: J
- SIZE: 18
- INSERT ARRANGEMENT: 20
- CONTACT STYLE: P
- ALTERNATE INSERT POSITION: Y

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 10 SEPT '62 REVISED (C) FOR CHANGES SEE SHEETS 1 & 2.

P.A. NAVY-AS Other Cust USAF-11 ARMY-EL	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC CRIMP TYPE, JAM NUT MOUNTING PUSH-PULL COUPLING SERIES 2 (CLASS E AND J)	MILITARY STANDARD MS 3144
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 2

DD FORM 672 10 APR 64 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1972-714-535/395

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.