This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5935

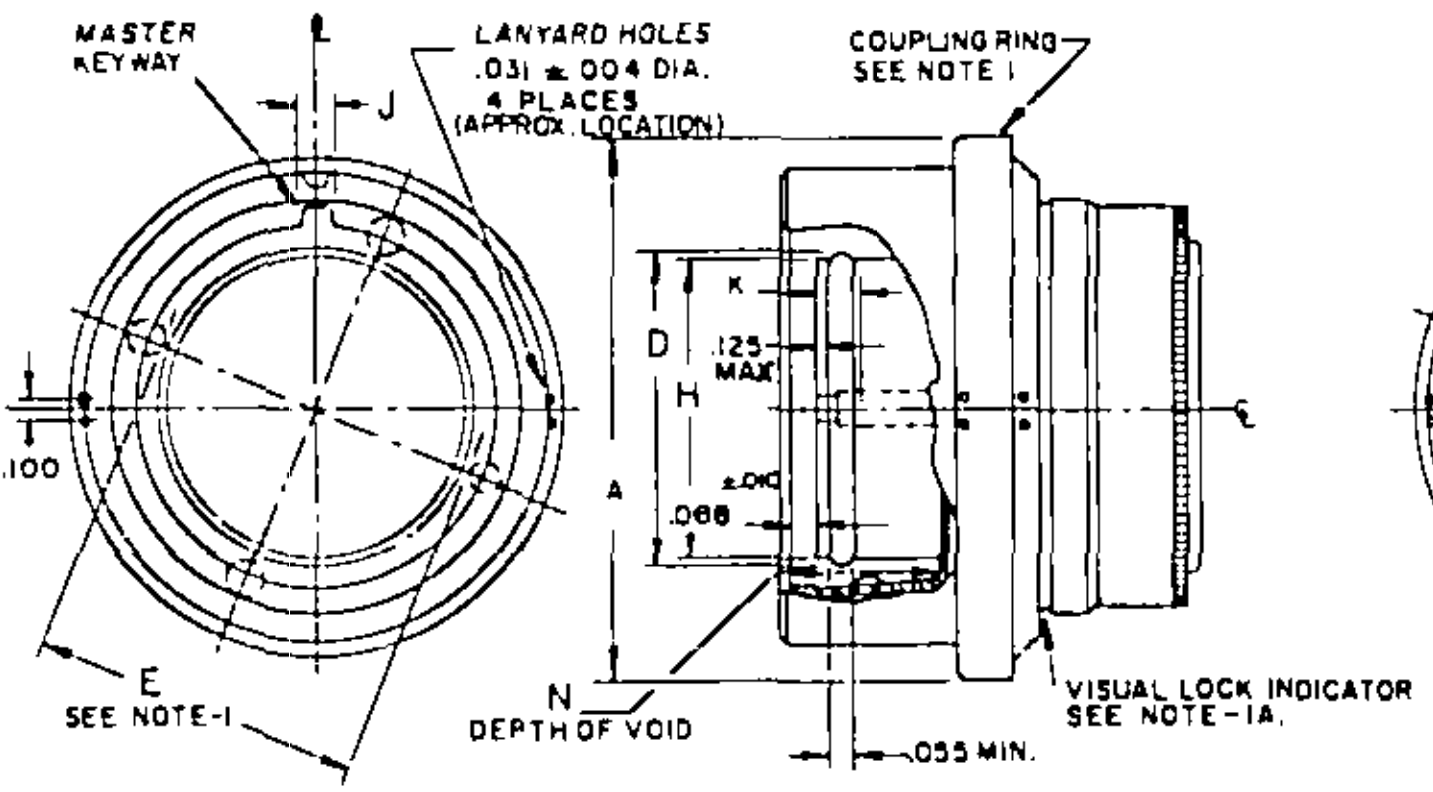

STYLE S (SOCKET INSERT)

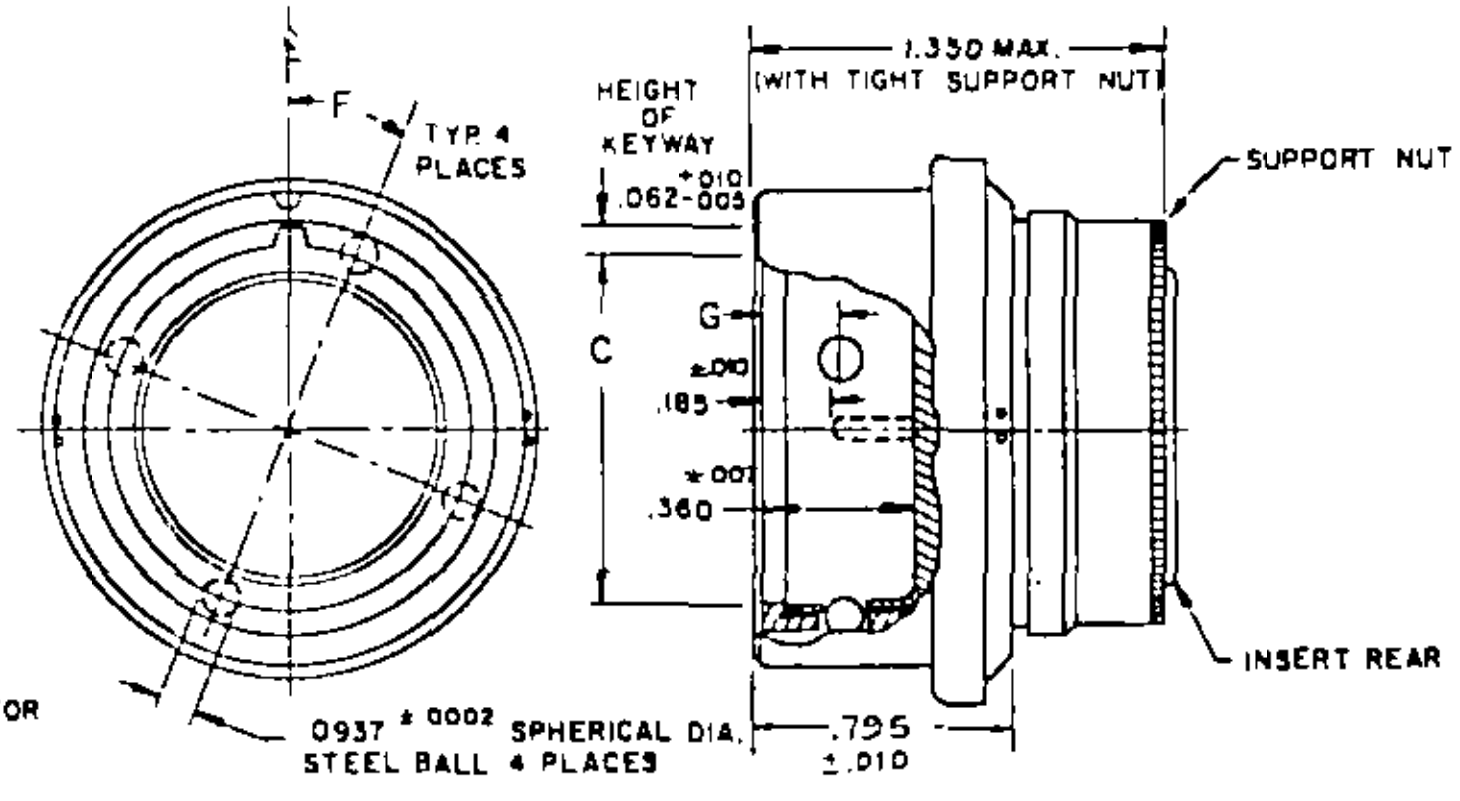

STYLE P (PIN INSERT)

CLASS E

SHELL SIZE DASH NO	A MAX DIA COUPLING RING	C MIN I.D. SHELL	D ±.006 AVERAGE DIA. INSERT SEAL	E MIN. DIA BALL SPACING	F BALL LOCATION (ANGULAR)	G +.002 −.005 BALL LOCATION (DEPTH)	H DIA OF INSERT	J MAX WIDTH OF KEYWAY	N ±.031 DEPTH OF VOID	K POINT OF SPRING CONTACT	FOR INSERT ARRANGMENT SEE DRAWING
-3	.840	.444	.374	.391	30°	.202	.344	.114	.310 IN DISENGAGED POSITION	.138 MAX. MEASURE WITH SQUARE NOSE PIN HAVING BASIC DIAMETER OF MATING CONTACT	MS 33698
-7	.970	.579	.490	.526	22 1/2°		.460				MS 33699
-12	1.090	.713	.630	.661			.600				MS 33700
-19	1.280	.852	.770	.799			.740				MS 33701
-27	1.455	1.007	.925	.954			.895				MS 33702
-37	1.590	1.127	1.047	1.076			1.017				MS 33703

NOTE: 1

COUPLING RING AND BALLS ARE SHOWN IN THE ENGAGED POSITION FOR CLARITY. THIS POSITION SHALL ONLY BE POSSIBLE WHEN ENGAGED TO THE RECEPTACLE. IN THE NORMAL DISENGAGED POSITION THE FOLLOWING IS TRUE:

A. THE VISUAL LOCK INDICATOR IS NOT IN VIEW.

B. THE BALLS ARE RELEASED WHEN "E" MIN. EQUALS "C".

EXAMPLE OF PART NO. MS 3147 E 19-50 S Y

MS 3147	E	19	50	S	Y
MS NUMBER	CLASS	SIZE	INSERT ARRANGEMENT	CONTACT STYLE	ALTERNATE INSERT POSITION

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED TOLERANCE: DECIMALS: ± .016.
ANGULAR TOLERANCE: ± 1/2°.

APPROVED 10 SEPT 62 REVISED Ⓐ 1 NOV 1965 Ⓑ 6 Mar 67 Ⓒ 20 JAN 1969 Ⓓ 21 JULY 1971

P A NAVY-AS	International interest
Other Cust ARMY-EL	
Procurement Specification MIL-C-81703	

TITLE
CONNECTOR, PLUG, ELECTRIC
CRIMP TYPE, PUSH — PULL COUPLING
SERIES 2 (CLASS E AND J)

SUPERSEDES:

MILITARY STANDARD
MS 3147

SHEET 1 OF 2

DD FORM 672 10 APR 64 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-1761-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

CLASS J

JACKETED CABLE GLAND SEAL

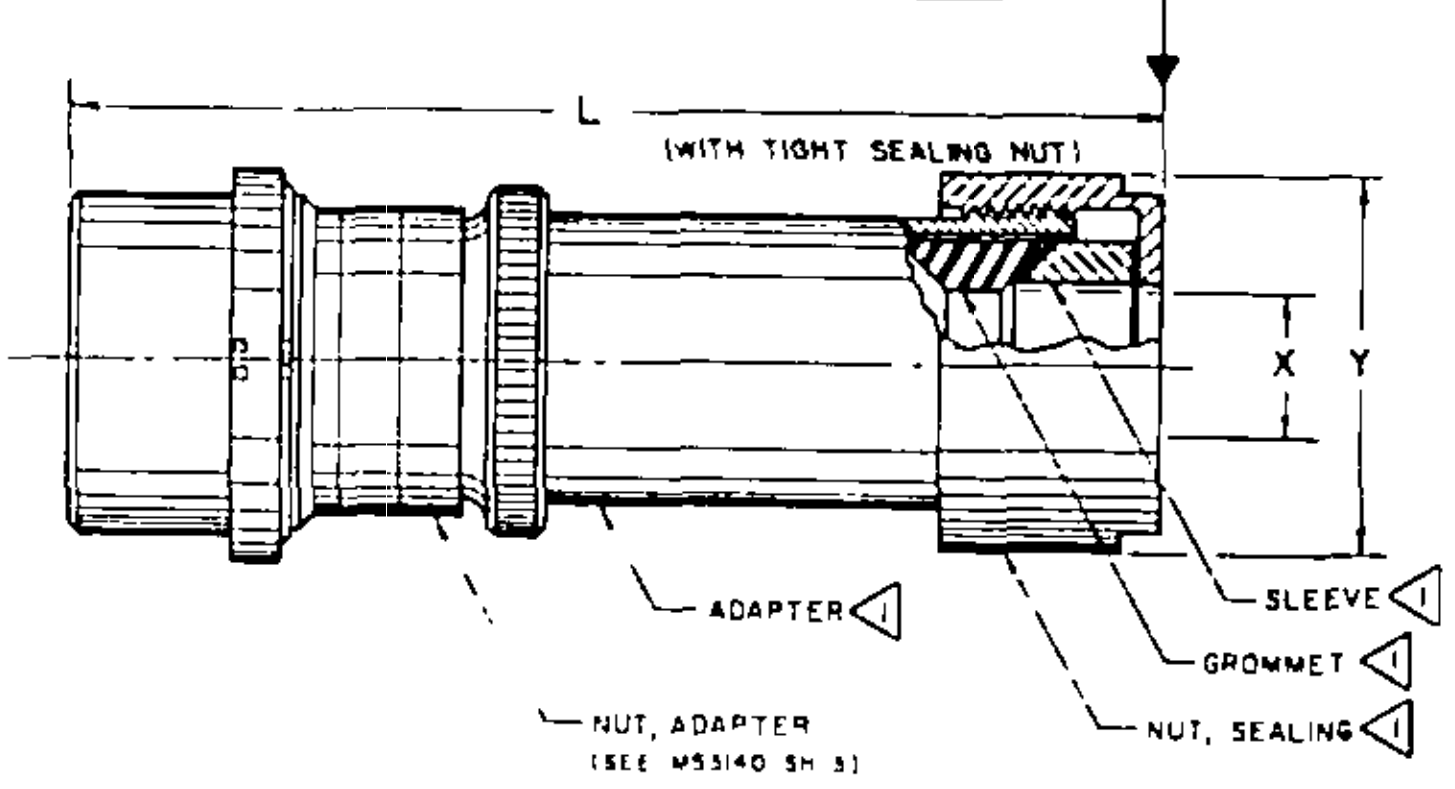

SHELL SIZE DASH NO.	L LENGTH MAX	X INSIDE DIA		Y MAX.	MP MAX CABLE WEIGHTS IN POUNDS (ALLOWABLE FORCE IN DIRECTION INDICATED)
		MIN	MAX.		
- 3	3.088	.178	.210	.645	2 0
- 7	4.072	.381	.413	.926	2 7
12	4 538	412	.444	.988	4 0
- 19	4.572	.522	554	1.113	5 5
-27	4.572	.600	.632	1.113	8.0
-37	4.603	.662	.694	1.176	12 0

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
TOLERANCE: DECIMALS ±.016, ANGULAR TOLERANCE ±1/2°.
1 FOR ADAPTER, SEALING NUT, GROMMET & SLEEVE SEE MS3130 SH. 3.

CLASS J JACKETED CABLE GLAND SEAL-WATERTIGHT TYPE-FOR USE WITH CLASS E CONNECTORS.

EXAMPLE OF PART NO.

MS3147 J 19-30 S Y

MS NUMBER	CLASS	SIZE	INSERT ARRANGEMENT	CONTACT STYLE	ALTERNATE INSERT POSITION
MS3147	J	19	30	S	Y

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID

FED. SUP CLASS
5935

APPROVED 10 SEPT. '62 REVISED (D) FOR CHANGES SEE SHEETS 1 & 2.

P A NAVY-AS
Other Cust
ARMY-EL

International Interest

Procurement Specification
MIL-C-81703

TITLE
CONNECTOR, PLUG, ELECTRIC, CRIMP TYPE, PUSH-PULL COUPLING (CLASS E AND J)
SERIES 2

SUPERSEDES:

MILITARY STANDARD
MS3147

SHEET 2

DD FORM 672 10 APR 64 (Formerly ...) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.