
FED. SUP CLASS
5220

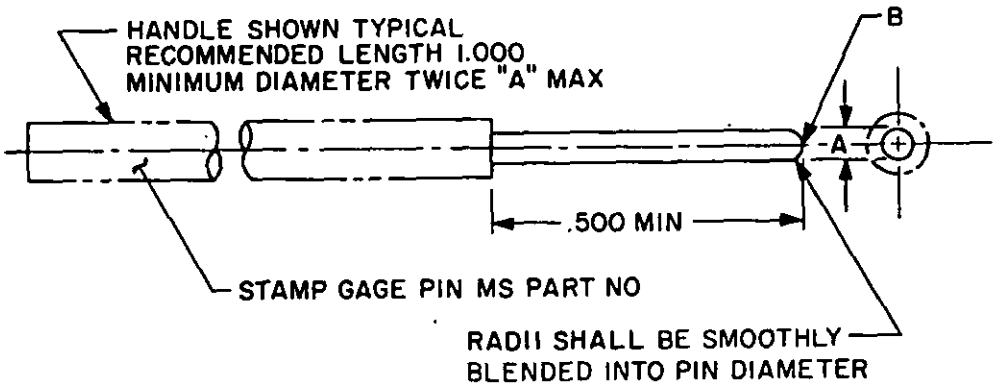

APPROVED 28 JUNE 1961 REVISED (F) 30 MAY 79 (G) 15 JULY 1983

Reviewer activities: Army CR,MI,AR,ME Navy AS,SH Air Force 11,17, 99 DLA-ES

User activities: Army Navy Air Force

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY-AS Other Cust ARMY-CR AF-85	International Interest	TITLE GAGE PIN FOR SOCKET CONTACT ENGAGEMENT TEST	MILITARY STANDARD MS 3197
Procurement Specification NONE		SUPERSEDES:	PAGE 1 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5220-0200

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:01Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5220

Dash No.	Contact size	A Min .0001 -.0000	A Max +.0000 -.0001	B Max flat	Gage pin material
-24X1	24	.0245			
-24Y1			.0255		
-23X1	23	.0260			Tool Steel or Tungsten Carbide
-23Y1			.0275	.007	
-22X1	22	.0295			
-22Y1			.0305		
-20X1	20	.0390			
-20Y1			.0410		
-16X1	16	.0615			
-16Y1			.0635	.015	
-12X1	12	.0930			
-12Y1			.0950		
-10X1	10	.1240			
-10Y1			.1260		
-8X1	8	.1410			
-8Y1			.1430		Tungsten Carbide
-6X1	6	.1770		.030	
-6Y1			.1790		
-4X1	4	.2240			
-4Y1			.2260		
-2X1	2	.2820			
-2Y1			.2840		
-0X1	0	.3560			
-0Y1			.3580		
-4/0X1	4/0	.4990		.060	
-4/0Y1			.5010		

Ⓖ

INCHES	MM	INCHES	MM
.0001	.002	.1240	3.150
.007	.18	.1260	3.200
.015	.38	.1410	3.581
.0245	.622	.1430	3.632
.0255	.648	.1770	4.496
.0260	.660	.1790	4.547
.0275	.699	.2240	5.690
.0295	.749	.2260	5.740
.030	.76	.2820	7.163
.0305	.775	.2840	7.214
.0390	.991	.3560	9.042
.0410	1.041	.3580	9.093
.060	1.52	.4990	12.675
.0615	1.562	.500	12.70
.0635	1.613	.5010	12.725
.0930	2.362	1.000	25.4
.0950	2.413		

Ⓖ

NOTES:
1. Dimensions are in inches.
2. Material: Gage pin, as shown in table; handle, optional.
3. Finish: 6 to 10 microinches root mean square determined in accordance with ANSI B46.1.
4. Plating: None.
5. These gages are intended for use with electric connector socket contacts in accordance with MIL-C-39029 and other specifications referencing this document.

For design purposes this standard takes precedence over procurement documents referenced herein. Referenced documents shall be of the issue in effect on date of invitations for bid.

APPROVED 28 June 1961 REVISED Ⓖ For chgs see pgs 1 and 2 15 JULY 1983

P.A. NAVY-AS	International interest	TITLE	MILITARY STANDARD
Other Cust ARMY-CR AF-85		GAGE PIN FOR SOCKET CONTACT ENGAGEMENT TEST	MS 3197
Procurement Qual Factor		SUPERSEDES:	PAGE 2 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army CR, MI, AR, ME
Navy AS, SH
Air Force 11, 17, 99
DLA-ES

User activities: Army
Navy
Air Force

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:01Z
Check the source to verify that this is the current version before use.