
FED. SUP CLASS. 5935

NOMENCLATURE SHALL BE CENTRALLY LOCATED IN THIS AREA AND MARKED ANNULARLY USING $\frac{1}{16}$ CHARACTERS, NOTE 2

LOCKWASHER, EXTERNAL TOOTHED ID $\frac{17}{64}$ NOM OD .375 MAX

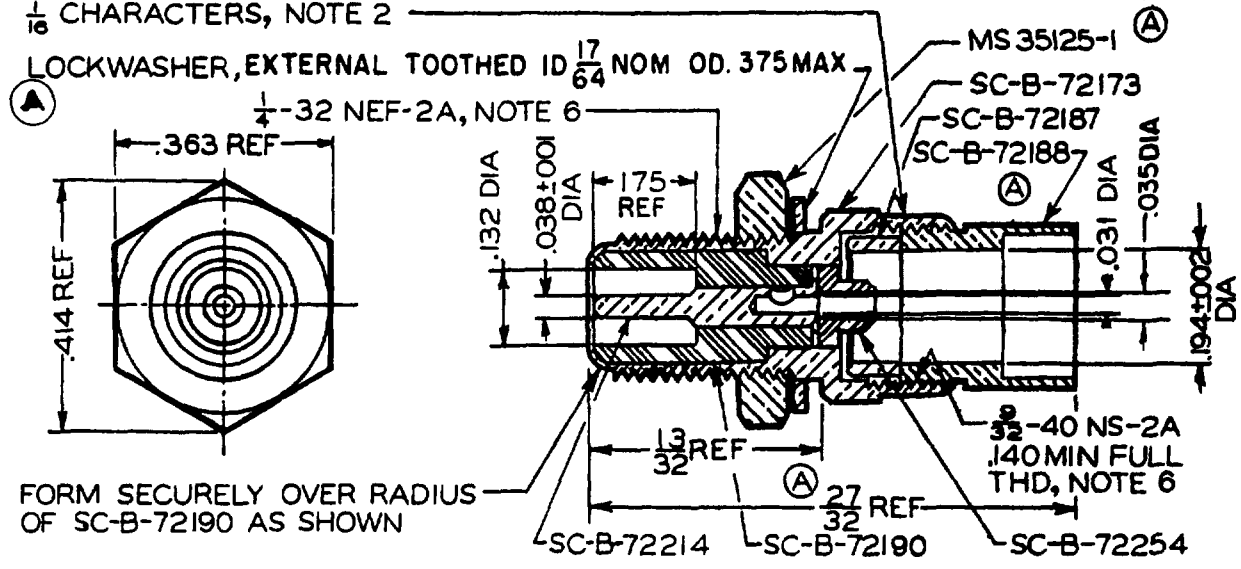

DASH NO.	FIIN
-1	

REQD	DESCRIPTION	MATERIAL	SIGNAL CORPS DRAWING NO.	REQD	DESCRIPTION	MATERIAL	MS/SIG CORPS DRAWING NO.
1	BODY	BRASS	SC-B-72173	1	CONTACT	BRASS	SC-B-72214
1	CLAMP, BRAID	BRASS	SC-B-72187	1	BUSHING	PLASTIC	SC-B-72254
1	NUT, CLAMP	BRASS	SC-B-72188	1	NUT, HEX	BRASS	MS35125-1
1	INSULATOR	PLASTIC	SC-B-72190	1	LOCKWASHER	FH BRZ	

NOTES:

1. TOLERANCE ON DIMENSIONS, WHERE NOT OTHERWISE SHOWN, SHALL BE HELD TO ± .003 ON DECIMALS, ± $\frac{1}{64}$ ON FRACTIONS.
2. METAL STAMP OR ETCH CHARACTERS TO MEET THE REQUIREMENTS OF SPECIFICATION MIL-M-13231
3. THE INSULATOR SHALL HAVE NO CRACKS OR VISIBLE FLAWS.
4. ALL METAL PARTS SHALL BE FREE FROM CHIPS, BURRS, AND SCRATCHES, IN ACCORDANCE WITH GOOD COMMERCIAL PRACTICE.
5. ALL METAL PARTS SHALL HAVE A SILVER-PLATE OF MINIMUM THICKNESS, .0002 INCHES AND OF SUFFICIENT SMOOTHNESS, AND DENSITY TO WITHSTAND THE EFFECT OF 48 HOURS OF SALT-SPRAY CORROSION PER FEDERAL SPECIFICATION QQ-M-151.
6. ALL SCREW THREADS SHALL BE PER NATIONAL BUREAU OF STANDARDS PUBLICATION H-28.
7. REFERENCED SPECIFICATION OF ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.

ALL DIMENSIONS IN INCHES

APPROVED 11 APR 1952 REVISED (A) 1 APR 55 (B2) 31 OCT 1956

CUSTODIAN	MILITARY STANDARD	MS 35124 (SIG C)
SIGNAL CORPS	RECEPTACLE, CONNECTOR (TYPE-SM) UG-923/U	
PROCUREMENT SPECIFICATION NONE		SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:10Z
Check the source to verify that this is the current version before use.