
FED SUP CLASS
4130

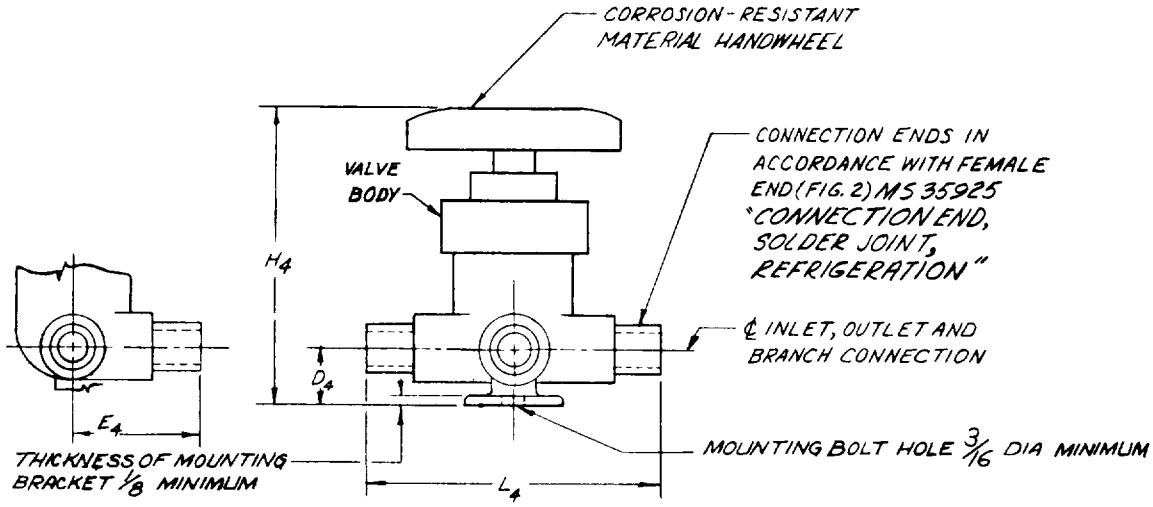

© DASH NO. 1/	TUBE OD SIZE	L_4 MIN	L_4 MAX	H_4 FULL OPEN MAX	D_4 MIN	E_4 MIN	E_4 MAX
-1 -1U	1/4	2 3/4	3 3/4	3 3/4	9/16	1 3/8	1 7/8
-2 -2U	3/8	2 3/4	3 3/4	3 3/4	9/16	1 3/8	1 7/8
-3 -3U	1/2	3	3 3/4	3 7/8	5/8	1 5/8	2 1/4
-4 -4U	5/8	3 3/8	3 7/8	4 1/4	3/4	1 7/8	2 3/8

1/ MS DASH NUMBERS WITHOUT LETTER DESIGNATES VALVE BACKSEATING ABOVE DIAPHRAGM ONLY

MS DASH NUMBERS WITH LETTER "U" DESIGNATES VALVE BACKSEATING ABOVE AND BELOW DIAPHRAGM

NOTES

1. VALVE BODY:
© A. MATERIAL: FORGED COPPER, ALLOY 377 OF QQ-B-626
B. FINISH: MANUFACTURERS STANDARD COMMERCIAL.
2. OPERATING REQUIREMENTS:
A. MAXIMUM OPERATING PRESSURE: 300 P.S.I.G.
B. MAXIMUM OPERATING TEMPERATURE: 200 F.
WHEN VALVE IS SUBJECTED TO MAXIMUM OPERATING REQUIREMENTS THERE SHALL BE NO LEAKAGE BY SEAT OR TO THE OUTSIDE AND THE VALVE SHALL OPEN READILY WITH MAXIMUM OPERATING PRESSURE ABOVE SEATING DISK.
3. SEATING DISK AND DIAPHRAGM.
MATERIAL: RESILIENT, CORROSION-RESISTANT, LONG WEARING METAL OR COMPOSITION MATERIAL IMPERVIOUS TO ALL REFRIGERANTS OF THE CHLORO-METHANE FAMILY
4. ALL SIZES SHOWN ARE OUTSIDE TUBE DIAMETER SIZES.
5. ALL DIMENSIONS GIVEN IN INCHES.
6. VALVE SHALL HAVE THE DIRECTION OF FLOW INDICATED ON BODY, UNLESS VALVE IS NON-DIRECTIONAL.
7. MOUNTING BOLT SPACING IS SUBJECT TO INDUSTRY PRACTICE.
8. VALVE SHALL HAVE AN UNRESTRICTED FLOW AREA AT LEAST EQUIVALENT TO THE AREA OF A CIRCLE HAVING A DIAMETER EQUAL TO THE INSIDE DIAMETER OF THE TUBING.
9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
10. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
© 11. PART NUMBER. THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS 35882-1U

APPROVED 11 DECEMBER '57 REVISED (A) 29 JULY '66 (B) 19 NOV 1971 (C) 16 MAR 1978

Review activities: Army - MI, USAF - 11, DLA - GS
User activities: Navy - MC

This Military Standard has been approved by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

CUSTODIANS
ARMY-GL
NAVY-SH
USAF-99

PROCUREMENT SPECIFICATION
NONE

MILITARY STANDARD

VALVES, PACKLESS, STOP, THREE-WAY, SOLDER-JOINT CONNECTION ENDS

SUPERSEDES:

MS 35882

SHEET 1 OF 1

DD FORM 1 OCT 52 672-1

M-77

4130-0264

☆ U.S. GOVERNMENT PRINTING OFFICE: 1978-703-122/1965

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.